

Projects, hi-fi, ham radio, computers, CB, SWL

electronics today


APRIL 1979

INTERNATIONAL

\$1.40*

NZ \$1.50

Power from Satellites

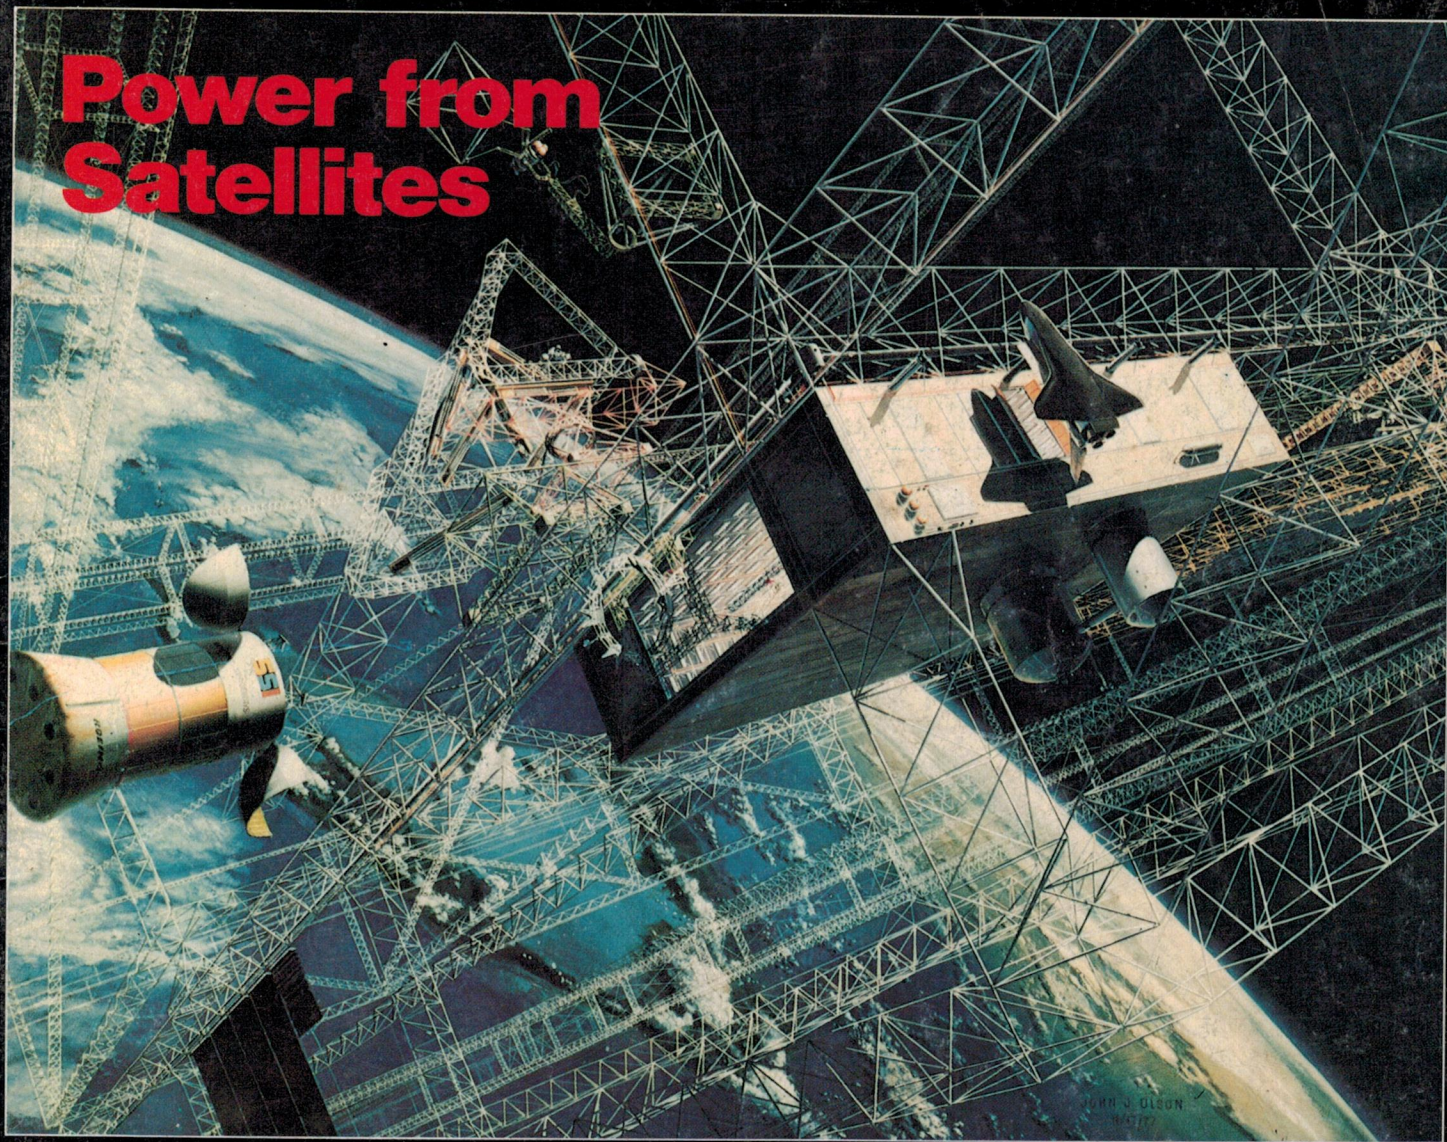

Video cassette recorders

Battery condition indicator

FT-7 amateur rig reviewed

Only hi-fi, everything hi-fi.

Sansui



Unlike any other!

Sansui's Pure Power G-7500 DC stereo receiver is unlike any other because of the exceptional musical quality of the reproduced signal. To achieve such quality, Sansui engineers went beyond conventional specs to annihilate TIM — transient intermodulation distortion.

TIM ordinarily occurs with the complex, pulsive signals that are typical of the actual music you enjoy hearing. Proof that Sansui has virtually eliminated such distortion is the super-high 60V/ μ sec. slew rate and very fast 1.4 μ sec. rise time. We believe that no other amplifier, let alone

receiver — at any price, can match such performance.

Radically reduced TIM is only one benefit from Sansui's original DC circuitry. Eliminating capacitors in the NF loop and inputs and outputs is another vital step towards pure power for pure sound. An extraordinary frequency range — from DC (zero Hz) to 200,000 Hz — assures the cleanest and clearest sounds you've ever heard.

New standards. New features. A full 90 RMS watts per channel with low 0.025% T.H.D. Sansui's unique DC configuration means pure power for

pure music. The same outstanding basics can be enjoyed in our other Pure Power receivers:

G-5500 (60 watts 0.03% T.H.D.)

G-4500 (40 watts 0.1% T.H.D.)

G-3500 (26 watts 0.1% T.H.D.)

For receivers that deliver the best, come to Sansui.


SANSUI
G-7500

SANSUI ELECTRIC CO., LTD. 14-1 Izumi 2-chome, Suginami-ku, Tokyo 168, Japan
VANFI (AUST.) PTY. LTD. 162, Albert Road, South Melbourne, Victoria 3205, Australia Tel: 699 5473
283 Alfred Street, North Sydney, N.S.W. 2060, Australia Tel: 929 0293

electronics today

INTERNATIONAL

Acting Editor: Roger Harrison VK2ZTB
 Managing Editor: Collyn Rivers
 Project Manager: Phil Wait VK2ZZQ
 Special Assign.: Les Bell GM4CFM
 Editorial Staff: Phil Cohen
 Jonathan Scott VK2YBN
 Jan Vernon
 Assembly: Bill Crump

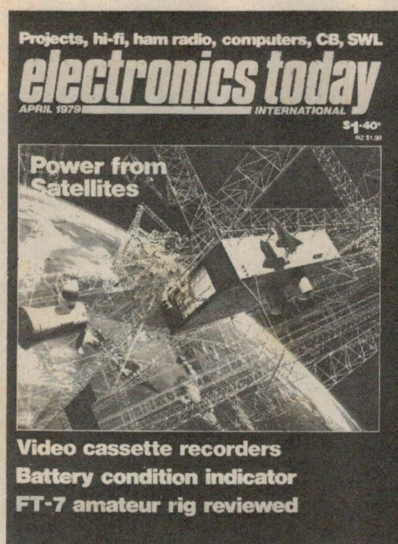

Cover: Artist's impression of a 'Powersat' under construction. Huge satellites, assembled in space, are seriously proposed as a future means of delivering solar energy to power-hungry Earth. Fascinating feature article begins on page 10.

PROJECTS

- 249: Electronic combination lock 34
Thirteen left, five right, or was it . . .
 294: Development timer 39
An aid to better prints
 320: Battery condition indicator 44
Car battery OK, under or overcharged?
 799: 'International' FM Tuner 49
A pre-supper project

FEATURES

- Solar Power via Satellite 10
Man's most ambitious project?
 Sound 17
The musical scale and auditory response
 Video Cassette Recorders 22
The next consumer boom item
 State of the Art Transceiver 30
Inside a high technology CB rig
 Indexes and Errata for 1977-78 54
Now you can find what you're looking for
 Printout: The Exidy Sorcerer 63
Review of an "amateur's" machine
 Wideband Antenna Baluns 70
Building simple matching devices
 Yaesu Muse's FT-7 mobile 86
Popular amateur transceiver reviewed

NEWS & INFORMATION

- | | |
|----------------------------------|------------------------------------|
| News Digest 5 | Kits for ETI Projects 75 |
| Sound Briefs 20 | Mini Mart 97 |
| Printout News 66 | Ideas for Experimenters . . . 101 |
| CB News 79 | Reader Services 106 |
| Amateur News 83 | Index to Advertisers 106 |
| SWL News 93 | April joke 49 |
| Propagation Predictions . . . 90 | Synergistic Beer Drinking . . . 59 |



A Modern Magazines Publication
 * Recommended retail price only.

Registered for posting as a publication -
 Category B

SEALED, RECHARGEABLE, MAINTENANCE-FREE BATTERIES...



Internationally accepted YUASA BRAND batteries have such features as —

- no maintenance, never need topping up • unspillable, may be charged/discharged in any position • wide range of capacities.

SEALED NICKEL CADMIUM BUTTON CELLS

- Various types available for — Standard rate discharge High rate discharge Trickle charge
- Large range, 1.25 cells available in single or multi cell stacks from 10 MAH to 500 MAH
- May be charged and discharged over a wide temperature range

SEALED NICKEL CADMIUM SINTERED PLATE CELLS

- Various types available for — High temperature operation, Rapid recharging, High rate discharge
- Self resealing gas release safety venting system
- Large range 1.25 volt cells from 140 MAH to 3500 MAH
- 'AA', 'C' and 'D' sizes available

SEALED LEAD CALCIUM BATTERIES

- Long life, 1200 cycles or 5 years float service life possible
- Self resealing gas release safety venting system
- May be continuously cycled or float charged
- May be charged and discharged over a wide temperature range
- Long shelf life, capable of prolonged open circuit standing
- Large range — 6 volts from 1.2 A.H. to 10 A.H. 12 volts from 1.9 A.H. to 20 A.H.

ADDRESS ALL ENQUIRIES TO:

New South Wales: I.E.I. Pty. Ltd. 109 Alexander Street Crows Nest, 2065 Phone: 438 2722, 438 2932

Victoria: I.E.I. Pty. Ltd. 29 Stafford Street Huntingdale, 3166 Phone: 544 8411

Queensland: Bob McKnight (Trading) 23 O'Connell Terrace Bowen Hills, 4006 Phone: 52 7600

Western Australia: R.F. Datodi & Associates 16 Prowse Street West Perth, 6005 Phone: 321 4429



South Australia: Aquavia Controls Pty. Ltd. 61A Baden Terrace O'Sullivan's Beach, 5166 Phone: 384 1444

Tasmania: George Harvey Electric Pty. Ltd. 76 York Street Launceston, 7250 Phone: 31 6533. 162-164 Argyle Street Hobart, 7000 Phone: 34 2233

IMPORTED BY **CHLORIDE** Chloride Batteries Australia Limited

now the most complete range available in Australia

News Digest

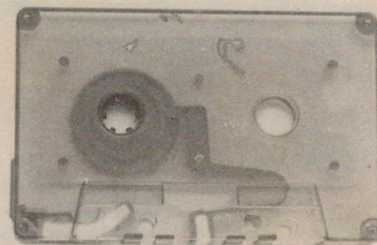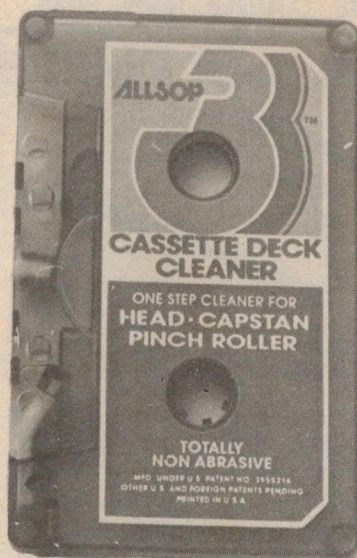

The Allsop head cleaner. A felt pad, driven by the take-up spindle, wipes across the heads as the cassette is 'played'.

A Long Felt Want

Like so many *really* clever ideas, this one's *remarkably* simple.

You want to clean a cassette head, right? The access is limited by the cassette mechanism. The ideal cleaning medium is a felt pad soaked in a solvent.

One possibility is to go for a set of tools, complete with mirrors on long handles, to enable you to play at dentist inside your tape recorder. This is fine if you happen to have been trained as a dentist. Most people find that using such an arrangement is a pain in the ... er ... mouth.

Another approach is to use a 'head-cleaning' cassette. These contain a length of abrasive tape which slowly grinds the muck off. Unfortunately, it doesn't clean the pinch wheel and roller. The effect it has on the head itself is also questioned by those who believe that any sort of abrasive shouldn't go within less than a metre of a tape head. The tape doesn't carry any solvent and doesn't absorb the dirt — it just grinds it off.

Ideally, what's required is a dummy cassette with a felt pad, driven by the

machine, that you insert — press the button and let the machine do the rest. That's just what CPI (Aust) have just released here.

A cam in the cassette is driven by the take-up reel and moves a felt pad on an arm back and forth across the head. As a bonus, a second pad is held against the capstan and pinch wheel to clean *them* as well.

A bottle of cleaning solution comes with the cassette so that the pads can be soaked before use. This helps remove grease.

The whole thing is very effective and is bound to make an impact on the Australian market. It's available from CPI (Aust.) Pty. Ltd., PO Box 264, Double Bay, Sydney 2018

Skylab's Fall

When the 85-tonne 'Skylab' space workshop de-orbits (as NASA so poetically puts it), about 25 tonnes of high-technology space garbage will fall in an area covering 12% of the Earth's surface.

This will consist of 400 to 500 pieces, each travelling at speeds up to 100 m/s. It will include the film vault and airlock shroud — weighing two tonnes each — which are both designed to come down *intact*. We calculate that each will have a kinetic energy equivalent to 50 kg of TNT! NASA reckon the chances of a one-tenth tonne piece falling into an inhabited area as one in forty.

Admittedly, there's nothing we can do about it — but why wasn't all this thought of when the thing went up? NASA seem to be playing the whole thing down (for obvious reasons). The figures released for one-tenth

tonne objects is all very well but what's the smallest size which could damage property? 50 kg?, 10kg? The chances of smaller bits hitting inhabited areas must be greater. Even at forty to one, any bookmaker will tell you that longer odds have come off in the past.

Meanwhile the Americans are taking the whole thing in their stride as usual. (Well, it's only natural that they should be responsible for what must be the largest lottery in the world). A Washington (DC) company, called Chicken Little Associates, is offering a service (at \$US100 a time) to warn people if they happen to be in the path of any of the space junk as it falls with greater and greater predictability onto a mainly unsuspecting public.

NASA think that the Grand Draw for the find-a-piece-of-Skylab-in-your-back-yard lottery should be around the end of this year.

VTR Film Suit

Two film studios in the States have filed a copyright infringement suit against Sony over the use of the Betamax video cassette system.

Universal Studios and Disney claim that *no* material can be recorded legally from the TV.

Sony have replied that Universal and Disney should only be involved in alleged infringements of their own material and that most TV programmes have nothing to do with them. They also claim that the studios have used private detectives to talk retail sales staff into recording films from TV for evidence.

Claims and counter-claims will probably be flying across US court-rooms for some time to come. This looks like it's going to be a long one. They may even have to brief Rumpole of the Bailey!



EMONA
enterprises

ROOM 208/661 GEORGE ST, SYDNEY.
PH: 212-4815, 211-3038

P.O. Box 188, COOGEE. NSW. 2034.

**FOR PROMPT MAIL
ORDER SERVICE!**

sinclair

DIGITAL MULTIMETERS



PDM35

Only \$65 \$55
(plus 15 percent S/T.)

Now everyone can
afford to own a
digital multimeter

Features:

A digital multimeter used to mean an expensive, bulky piece of equipment. The Sinclair PDM35 changes that. It's got all the functions and features you want in a digital multimeter, yet they're neatly packaged in a rugged but light pocket-sized case, ready to go anywhere. **Features:** 3½ digit resolution reading to plus/minus 1999. Automatic polarity selection. 10M ohm input impedance. Full multimeter facilities. Resolution of 1mV and 0.1nA. Semiconductor junction test facility. 1 percent of reading accuracy. Genuine pocket format. **Ranges:** DC volts: 1mV to 1000V. AC volts: 1V to 500V. DC current: 1nA to 200mA. Resistance: 1 ohm to 20M ohms. **Contents:** PDM35; test leads with probes; owner's operating manual — protective carrying pouch. **Power Requirements:** 9 volt transistor radio battery or 9 volt approved AC adaptor.

DM235




Only \$130
(plus 15 percent sales tax)

Features:

• 3½ digit resolution • Large, bright, wide angle LED display reading to ± 1999 • Automatic polarity selection • Industry standard 10M ohms input impedance • 0.5 percent of reading basic accuracy • Full multimeter facilities including AC current • Resistance measurement up to 20M ohms. • Direct reading of semi-conductor forward voltages at 5 different currents • Simple, unambiguous controls with readings always in volts, mA or k ohms. • Selection of all functions from a single input terminal pair • Automatic overrange indication • Automatic decimal point placement • Operation from disposable or rechargeable cells, or from AC adapter/charger • Facility for battery condition test.

INTRODUCING THE

**SINCLAIR
DM350**



Introductory price only

\$190 Plus 15 percent S/T.

Features:

The DM350 is a laboratory quality digital multimeter. The large LED display has an exceptionally wide viewing angle and a variable brightness control. Measures AC volts, DC volts, AC current, DC current, resistance and diode volts in a total of 34 ranges. Special features include ultra wide current handling from 1uA up to 10 amps, and very high input impedance on the 2000mV range (in excess of 1000 M ohm). The DM350 will operate from low cost disposable cells or from an optional AC adaptor. This adaptor also serves as a charger when the rechargeable battery pack is fitted.

Exclusive SINCLAIR 12 MONTHS GUARANTEE!! Write or phone for further details.

QUALITY CALCULATORS
at competitive prices

from **TEXAS INSTRUMENTS**

**PC100A
with
TI-58/59**



	Excl. S. Tax	Incl. S. Tax
T.I.-25.....	\$32.00	\$35.00
T.I.-30 Student Pack.....	23.00	25.00
S.R.-40.....	28.00	32.00
T.I.-50.....	36.00	40.00
T.I.-55.....	53.00	59.00
T.I.-57.....	74.00	85.10
T.I.-58.....	109.00	120.50
T.I.-59.....	247.00	275.00
T.I.-5050M.....	81.00	90.00
Little Professor.....	16.00	17.90
Data Man.....	23.00	25.00
T.I. First watch.....	20.00	22.00
T.I. Speak and Spell.....	45.00	50.00
T.I. Spelling Bee.....	28.00	31.00
T.I.-Business Analyst.....	33.00	37.95
T.I.-Business Analyst 11.....	39.50	43.00
T.I.-MBA.....	75.00	87.40
T. I. Programmer.....	53.00	59.00
T.I.-MM Money Manager.....	21.00	23.50
PC-100A Printer.....	213.00	236.00
T.I. 5025 H/held printer.....	77.00	85.00
Library Modules for T.I.-58/59.....	31.00	35.00
Blank Mag. Cards for T.I.-59.....	14.00	16.10
Programming Forms — Pads.....	2.20	2.80
TP-30250 (3 rolls of paper, PC100A).....	10.00	11.50

SINCLAIR Enterprise
— Programmable!

• Real computing power.
• A comprehensive program library: General, Finance, Statistics, Mathematics, Physics, Engineering and Electronics.
(For more details see Sept. '78 ETI)



Excl. S/Tax **\$69.50** Incl. S/Tax **\$79.95**

**THE ULTRASLIM
NS-108 by National**

Semiconductor. For details see Sept. '78 ETI.

Excl. S/Tax **\$44** Incl. S/Tax **\$50**
\$40 \$46



BMC-1212PD, 12 Digit Display Printer Excl. S/Tax \$108.70. Incl. S/Tax \$125.00

CORONA — AD7802
AUTOMATIC TELEPHONE DIALLER

Includes 40 memories. only **\$325** (incl. sales tax)


WATCHES — DIGITAL AND QUARTZ ANALOGUE

- Gents, Ladies, Solar Chronographs, etc.
- QUARTZ ANALOGUE — NEUCHÂTEL, Swiss made.
- Check availability of all models before ordering.

BIE Dictating Machines & Transcribers!

STOP PRESS!

**NEW WORLD TIME
CLOCK — EMONA 103A**



\$75
12-month guarantee

Battery operated. One 1.5V operates the clock for one year. Aluminium dial, cross brushed, silver plated. Crystal-clear heavy acrylic case. Size: 19cm x 21cm.

NOTE: For all goods: P&P, Int. \$3, NSW \$2 (up to \$50 value) Int. \$4, NSW \$3 (up to \$100 value). Goods valued over \$100 delivered by courier — freight paid by receiver.

To: **EMONA ENTERPRISES**
PO Box 188, Coogee, NSW. 2034.



Please send me.....

I am enclosing cheque ☐ money order ☐

or debit my Bankcard, Number.....

Signature.....

Name.....

Address.....

P/code.....

TRADE ENQUIRIES WELCOME

Kimberley - award winner

A new transceiver to appear on the Australian market seems certain to capture a large share of the commercial two-way radio sales. The Australian designed and built Kimberley transceiver is probably one of the finest examples of communications engineering we've seen in a long time.

Winner of an Australian design award, the unit has proved popular in Western Australia and is soon to be marketed in the eastern states from a Sydney base.

As its name suggests, the Kimberley transceiver is designed to withstand extremely harsh environmental conditions. The unit is housed in a strong extruded aluminium case with dual speakers for reliability. A ruggedised version is also available which is 'splash proof'. Transceivers installed in ore trucks and other heavy mining vehicles have to withstand being hosed down regularly!

Inside the transceiver all components are readily accessible, the two main pc boards hinging out to reveal the screened power output and driver amplifiers. The double-sided boards are gold plated for reliability and long life.

Performance-wise the Kimberley is everything you'd expect from a modern solid state design. It features up to 20 crystal-locked channels which are available with the options of high or low band operation, repeater and link operation, selective call, remote control, transmit timer, privacy facility, telephone type handset and extension speaker. Power drain on receive is a low 150 mA.

All that aside, a price near \$500 (excluding sales tax) for a single channel VHF transceiver makes the Kimberley very attractive indeed. Other products include 25 and 50 watt base stations, remote control units, power supplies and cavity resonators.



For further information, contact *R F Systems (NSW)*, PO Box 148, Pennant Hills NSW 2120 (ph (02) 487 3850).

Disco Player

DiscoVision is *not* the latest John Travolta extravaganza — it's a video disc system which has just been released by Magnavox/MCA in the US.

Weighing in at about 15 kg and costing around \$US700, the set uses a laser to 'read' the discs and individual frames can be played back with random access.

Two hundred titles are available so far, with another hundred to be released

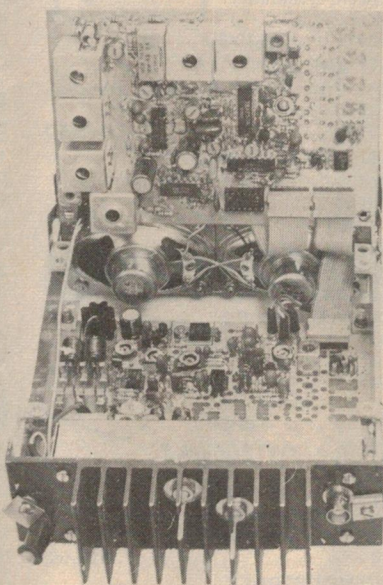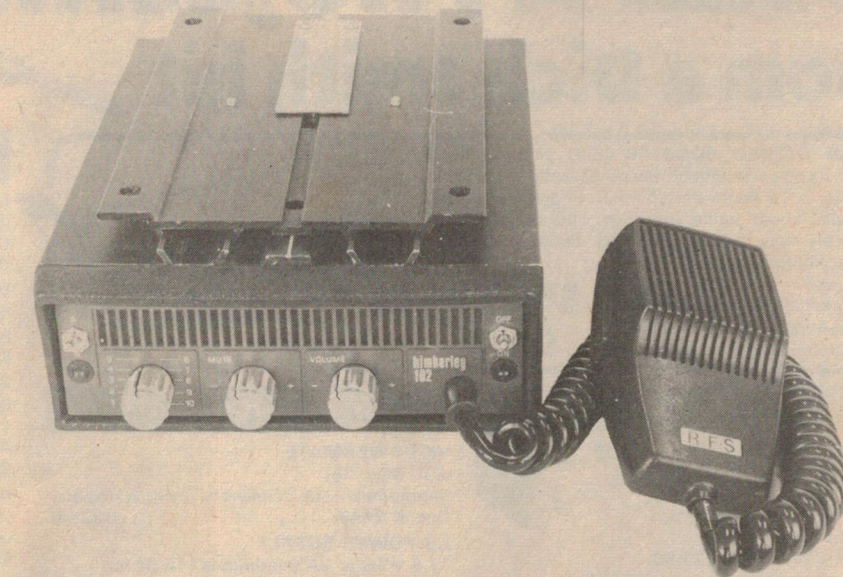

at the end of this year. Discs will cost between six and sixteen US dollars each. They come in either 'Standard Play', with 30 min/side or 'Extended Play', with 60 min/side.

The system also has outputs for stereo sound, which can be fed into a normal hi fi system.

Two possibilities which spring to mind are: using the system for high-quality music reproduction and high-density data storage. Any more?

15 000 More?

Many of our advertisers and readers are puzzled by the apparent contradiction in the audited circulation of this magazine and our nearest Australian competitor.

Electronics Today International was conceived and produced in Australia — commencing in April 1971. It was and still is an Australian product.

Overseas editions followed, and ETI is now published as separate editions in Australia, Britain, Holland, Germany and Canada. The total world circulation exceeds 150 000 monthly and is increasing.

Agreements with ETI's overseas editions restricts direct sales of the Australian edition to Australia and New Zealand only.

Our audited circulation relates solely to sales within Australia plus a quota-restricted 1 500 or so to New Zealand.


Within Australia the sales of ETI are, on average, substantially similar to those of our closest competitor.

Odd Sods

Brazil has set a limit of \$US130 mil/yr on computer imports in order to help its domestic industry. Critics see this as a gamble which may leave the country with too little computing power.

Sperry Co. have supplied Atlanta, Georgia with a laser-linked traffic control system. Transceiver heads at each intersection can communicate at up to 2 km, even in heavy fog.

BUILD A PROJECT... from a Dick Smith kit

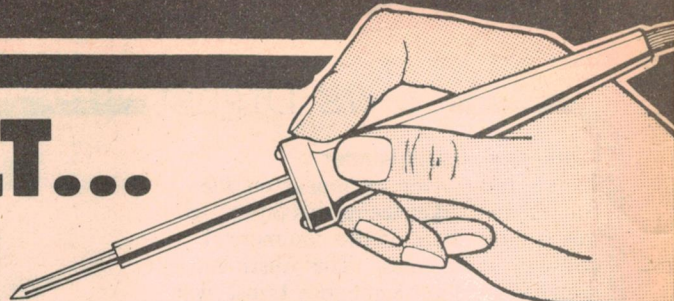

CAR STEREO BOOSTER (E.A. January 1979)
Boosts power output of your car cassette or FM stereo radio to 12 watts per channel — gives you home quality sound while you drive. This project is extremely easy to build. The Dick Smith kit contains everything you need — even a special anodised heatsink bracket and front panel decal — plus a specially written step-by-step construction manual.

\$29⁵⁰

Cat. No. K-3493




AUDIO AND AMPLIFIERS

PLAYMASTER 40/40 STEREO AMPLIFIER (E.A. December '76)
Our most popular kit ever. Thousands sold.
Cat. K-3411 \$129.50



PLAYMASTER TWIN 25 AMPLIFIER (E.A. May '76)
Similar to above, but less power. A great kit.
Cat. K-3410 \$105.00

PLAYMASTER AM/FM TUNER (E.A. Nov/Dec '78)
Matches Playmaster amplifiers — with in-built digital clock.
Cat. K-3494 \$159.50



LED LEVEL METER (E.A. June '76)
Easy to make, fully solid state.
Cat. K-3370 \$13.50

ETI480 100W POWER AMP MODULE (E.T.I. December '76)
100 watts for \$25.00? Unreal, man! (mono module).
Cat. K-3442 \$25.00

ETI480PS 50W POWER AMP MODULE (E.T.I. December '76)
As above, but 50W. Easily extended to 100W.
Cat. K-3440 \$19.50

ETI480PS POWER SUPPLY MODULE (E.T.I. December '76)
To run either 1 x 100W or 2 x 50W modules.
Cat. K-3438 \$19.50

MUSICOLOR Mk 111 COLOUR ORGAN (E.A. September '76)
Turns your music into light! Just add the lights.
Cat. K-3140 \$65.00

ETI601 MINI ORGAN (E.T.I. August '76)
YOU can play your favourite tune in style.
Cat. K-3430 \$26.50



LOUDSPEAKER PROTECTOR (E.A. June '76)
Eliminates turn-on and turn-off surges from most amps.
Cat. K-3425 \$13.50

AMATEUR CB, ETC.

VK POWERMATE (E.A. May '78)
Shortform kit — no metalwork, mains wiring etc.
Cat. K-3449 \$32.00

CB POWER SUPPLY
13.8 volts at 2A continuous (4A peak). Complete kit.
Cat. K-3448 \$29.50

MORSE KEYS (E.A. April '78)
Perfect Morse code — electronically generated. Including paddle.
Cat. K-3470 \$39.50




45 WATT VHF AMPLIFIER
Fibreglass PCB, 13.8V operation. Requires 8 — 12W of drive.
Cat. K-3132 \$29.50

30 WATT 80 METRE AMPLIFIER
Ideal for the novice. 13.8V. Adaptable to 50W output.
Cat. K-3133 \$35.75

MISCELLANEOUS

CAPACITOR DISCHARGE IGNITION (E.A. July '75)
Save petrol, end ignition troubles. Pre-wound coil.
Cat. K-3280 \$27.50



DRILL SPEED CONTROL Mk 2 (E.A. July '76)
Suits 240V 'universal' motors (not electronically switched or controlled types). A must for the home handyman.
Cat. K-3080 \$13.50

HIGH POWER STROBE (E.T.I. August '71)
A real blast — ideal for parties, discos, etc.
Cat. K-3150 \$29.50




TV MASTHEAD AMPLIFIER (E.T.I. August '71)
Can turn an unwatchable mess into a brilliant picture.
Cat. K-3230 \$32.00

COMPUTERS, ETC.

LOW COST VIDEO DISPLAY UNIT (E.A. February '78)
Communicate with a computer. Matches above.
Cat. K-3460 \$97.50

VIDEO MODULATOR for use with VDU (E.A. April '78)
Allows above VDU to be used with any TV set
Cat. K-3462 \$4.50

2650 MINI COMPUTER (E.A. May '78)
1k of memory — contains ALL parts required.
Cat. K-3447 \$125.00



ASCII KEYBOARD ENCODER (E.A. April '78)
Uses our standard keyboard (Cat. X-1180)
Cat. K-3464 \$39.50

CASSETTE INTERFACE (E.A. April '77)
Use any cassette player to communicate with computer.
Cat. K-3465 \$24.50

SHORTFORM MINISCAMP (E.A. May '77)
Contains PC board and components only.
Cat. K-3445 \$59.00

TV GAMES

10-GAME VIDEO GAME (E.A. July '78)
Features 4-way bat control, many combinations of bat sizes, ball speeds, angles, etc.
Cat. K-3491 \$49.50

STUNT MOTORCYCLE GAME (E.T.I. June '78)
Play 4 different games, motorcross, enduro, drag and stunt. Easy to build!
Cat. K-3474 \$29.50

TEST EQUIPMENT

40MHz DIGITAL FREQUENCY COUNTER (E.A. August/Sept. '78)
Versatile piece of test gear. Easily upgraded to 200MHz by adding 95H90 Pre-scaler IC. (Cat. Z-5360 \$12.50)
Cat. K-3437 \$99.50



NEW MODEL TRANSISTOR TESTER (E.A. July '78)
Checks most transistors and FETs quickly and easily.
Cat. K-3052 \$19.75

R-L-C BRIDGE (E.A. March '78)
Ideal project for the beginner or enthusiast.
Cat. K-3468 \$34.50

AUDIO OSCILLATOR (E.A. June '78)
Outstanding value for a valuable service aid.
Cat. K-3469 \$32.00

MAIL ORDERS: Certainly! Simply send your order to the Dick Smith Mail Order Centre, PO Box 747, Crows Nest NSW 2065. The chart at right shows the post and packing charges you must add to your order. (Order value at left, P&P charge at right).

\$5 - \$9.99	\$1.00
\$10 - \$24.99	\$2.00
\$25 - \$49.99	\$3.00
\$50 - \$99.99	\$4.00
\$100 or more	\$5.50

NOTE: Prices & stock availability could change between publication deadline & on-sale date due to circumstances beyond our control. Please check with our stores for latest availability & prices.

* SEE OUR DOUBLE PAGE AD FOR FULL LIST OF STORES AND DEALERS

DICK SMITH ELECTRONICS



News Digest

Single-chip Photo Imager

Hitachi has developed a new single-chip colour image pick-up device which promises to make home colour TV cameras as small and cheap as 8 mm movie cameras. The MOS device incorporates a special colour filter on the chip itself.

Hole Magnifier

This useful little device allows pc manufacturers to check on the quality of their plated-through holes. It shows the *inside* of the hole in a nine-segment 360° view with a five times magnification.

Drilling and plating imperfections can thus be quickly and easily spotted at an early stage of production.

The magnifier (called rather succinctly the Model ZPR Hole Inspector) can also be used by people who buy boards to keep an eye on (groan) the quality of what they get.

You never know, someone may even come up with another application for this fascinating little device — like checking lab mice for tooth decay, or

... well, the uses must be endless. *C & K Electronics (Aust.) Pty. Ltd., Office 2, 6 McFarlane St., Merrylands, 2160. PO Box 101 Merrylands (ph 692 3144).*

Desoldering Tool

Two new developments have been added to the Royel de-soldering tool.

One is a throw-away solder collection cartridge which sits in the sucker itself and can be changed easily and quickly.

The other is a 'boost' vent which, when the tip is withdrawn from the joint, whisks the molten solder from the bit's interior up into the sucker. This was designed especially for de-soldering small leads where the vacuum-induced airflow is restricted.

These two developments are claimed to overcome the major obstacles to vacuum de-soldering.

Royston Electronics, 22 Firth Street, Doncaster, VIC 3108 (ph 848 3777).



Electronic Agencies

Comings and goings in the Sydney trade — Bill Edge has bought Electronic Agencies from Pre-Pak. As well as the more usual hobbyist components, he will also distribute Philips speakers and kits.

Mr. Edge was the founder of Edge Electrix which once operated from Burwood.

Electronic Agencies are situated at 115-117 Parramatta Road, Concord, 2137 (Ph: 747-6472).

ETI/Unitrex Calculator Contest


The winner of February's calculator was Mr. Heip of Glandore, SA. He gave one of the two possible answers: RR, CM, DE, RL, IN. The other was CM, RR, DE, RL, IN.


This month's problem concerns a tuna retailer. He has four cans of tuna which weigh 110, 120, 140 and 125 g. He also has a set of scales — but no weights. To make matters worse, his scales have a 10 g bias to one side. What is the minimum number of weighings he needs to find the heaviest tin?

Write your answer, your name and address on the back of an envelope, stamp it and put our name and address on the front: Unitrex Calculator Contest (April), ETI Magazine, 15 Boundary Street, Rushcutters Bay, Sydney 2011. Closing date is May 5th.

Errata

In our February 79 edition, on p.63 in the ETI 557 Reaction Tester project, pin 12 of IC6 is the Q output, while pin 13 is the Q output, not as shown in the circuit diagram.

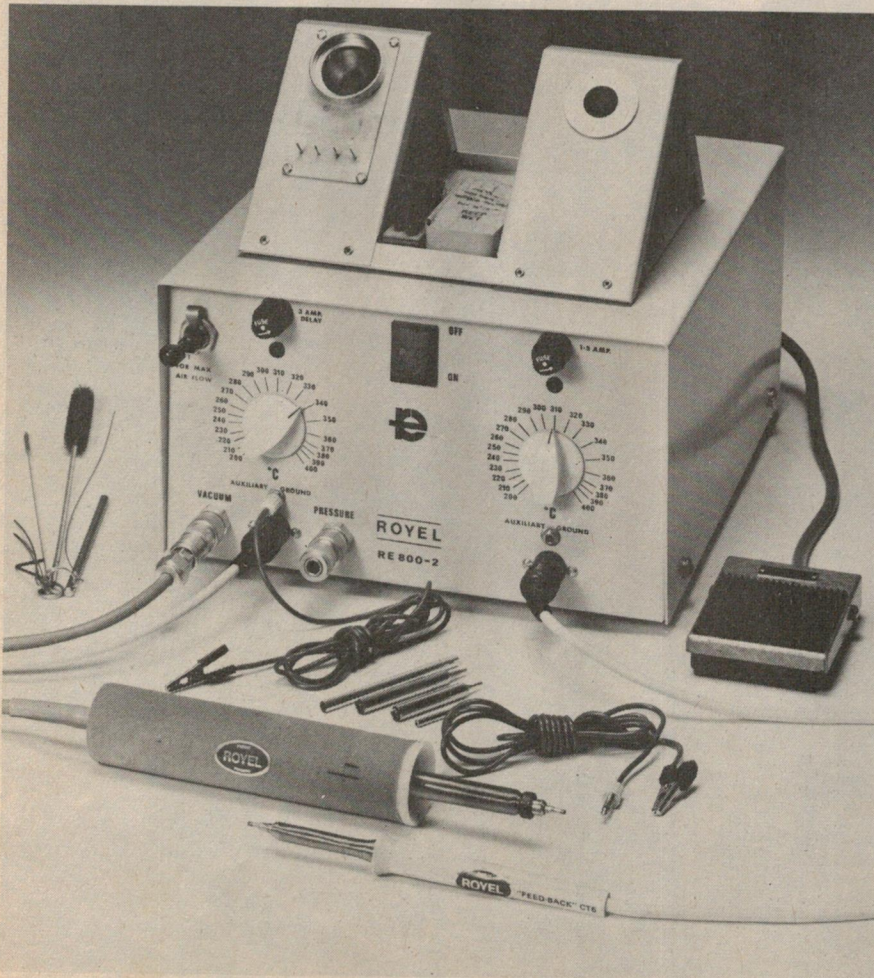

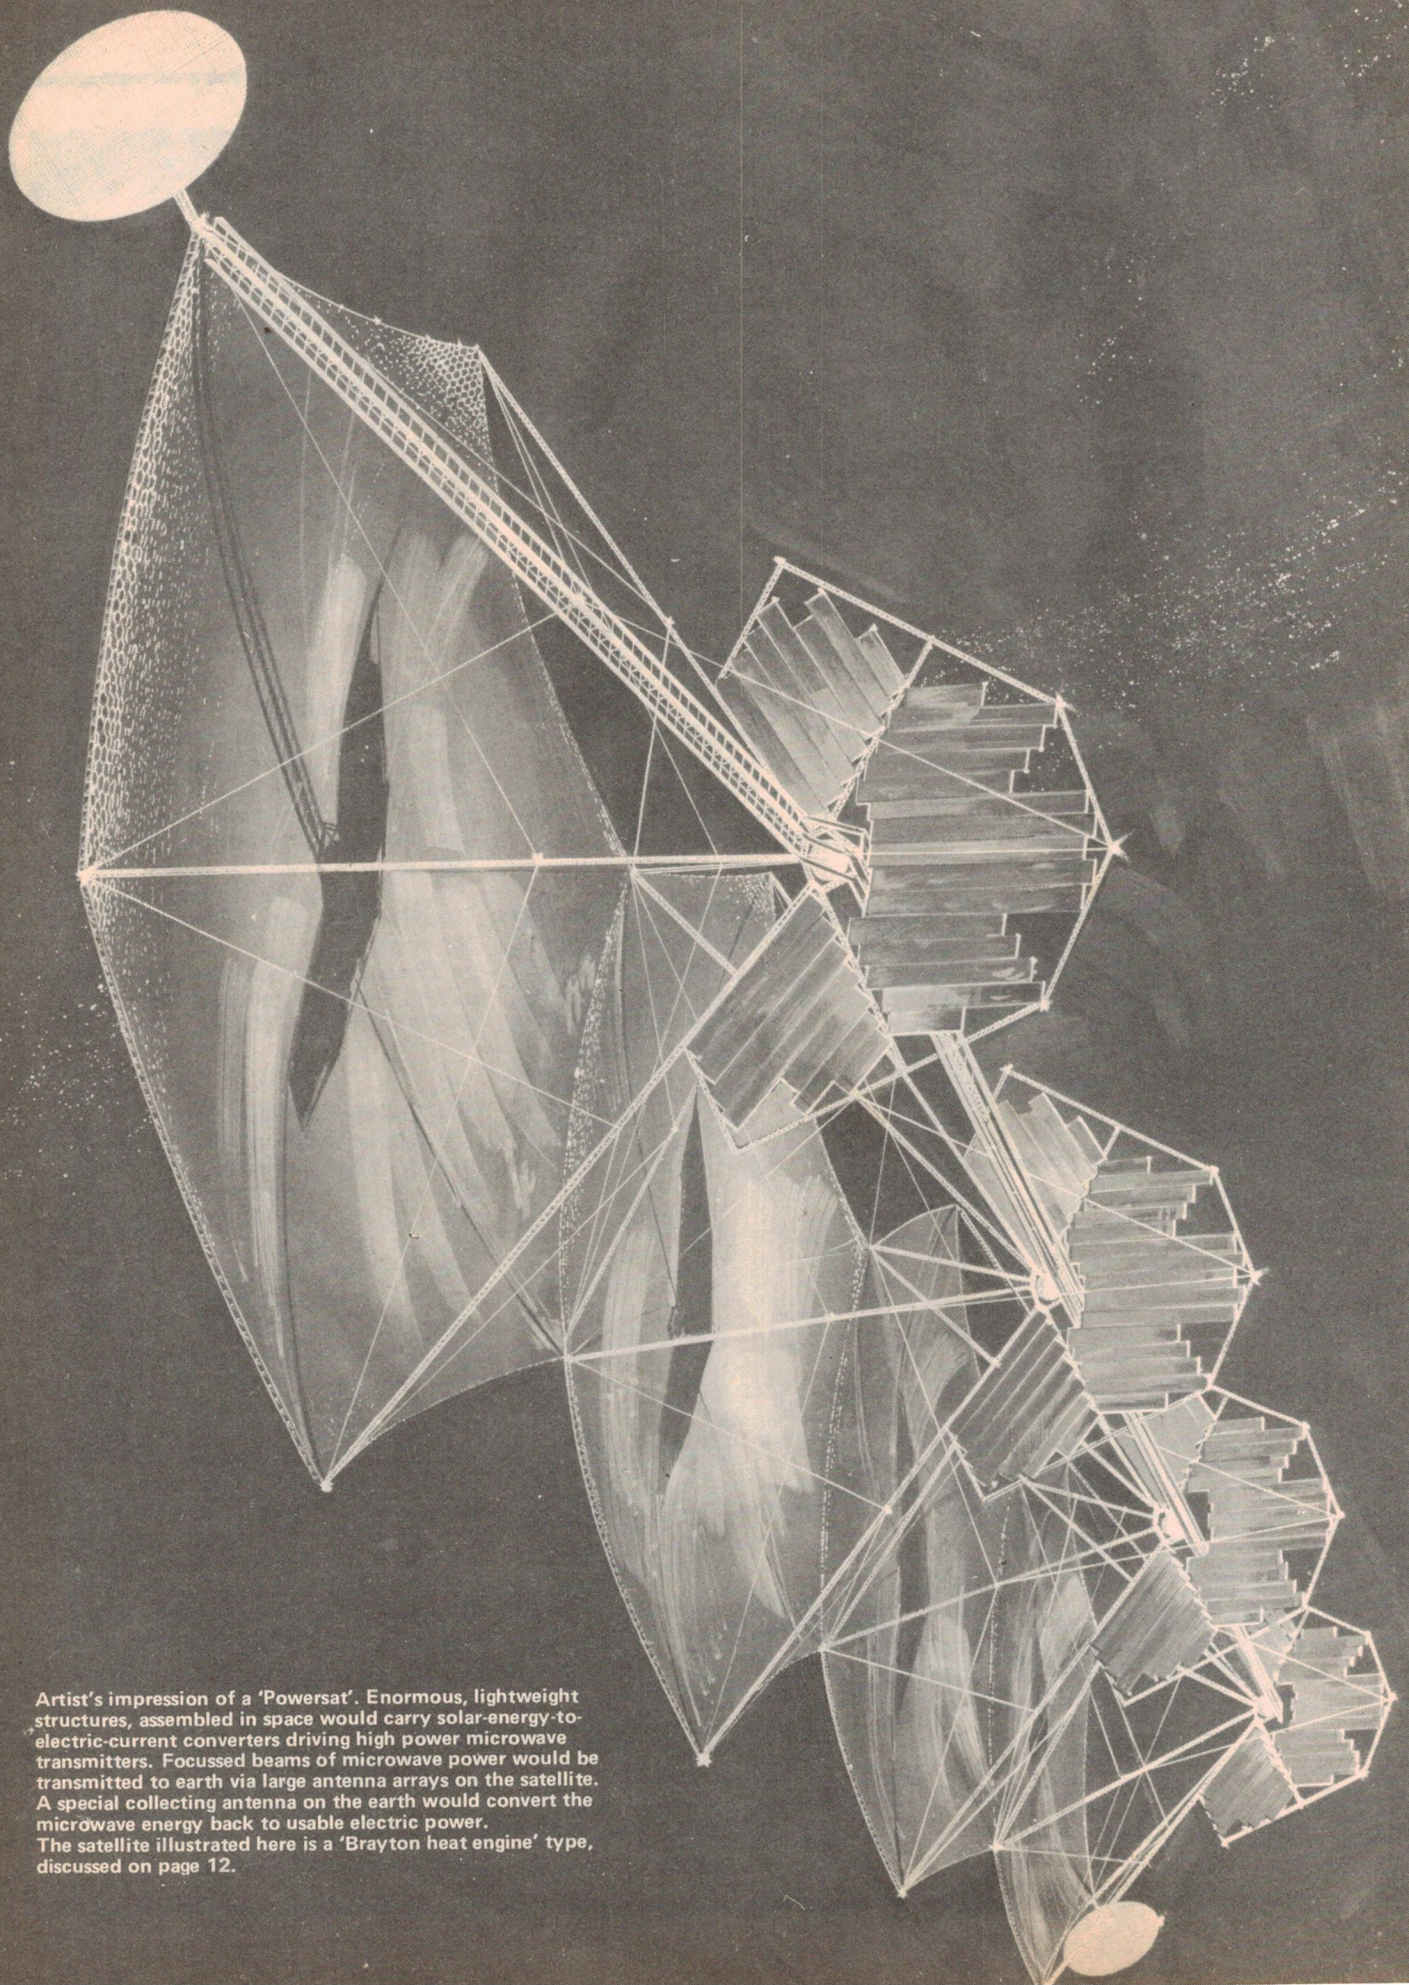

Artist's impression of a 'Powersat'. Enormous, lightweight structures, assembled in space would carry solar-energy-to-electric-current converters driving high power microwave transmitters. Focussed beams of microwave power would be transmitted to earth via large antenna arrays on the satellite. A special collecting antenna on the earth would convert the microwave energy back to usable electric power. The satellite illustrated here is a 'Brayton heat engine' type, discussed on page 12.

Solar Power Via Satellite

Solar power satellites could provide a real alternative to ground-based solar collector arrays as an infinitely renewable energy source. Brian Dance studies the possibilities.

WORLD-WIDE DEMAND for energy is growing at around 5% per year. Although conventional power stations using fossil fuels (coal and oil) are now backed-up by nuclear power stations, both fossil fuels and our supplies of fissionable isotopes are being depleted. Some action must be taken to provide for our energy requirements during the next century. fast breeder reactors have been suggested since they generated fissionable fuel, but some people think the associated environmental hazards are unacceptable.

Controlled nuclear fusion produces little radioactive waste and could use readily available hydrogen from the sea. This method is attractive in principle but despite twenty years scientific study has not yet produced useful power.

Solar Satellites

Other sources of power, such as the waves of the sea, geothermal sources, photoelectric converters etc have

been suggested but the most ambitious proposal yet made is for a number of huge satellites (often called 'Powersats' or 'Sunsats') to be assembled in space. They would convert the energy of sunlight into electrical energy which would be sent to the earth as a microwave beam. At the receiving station the energy would be converted into power suitable for feeding to our electricity grid.

This solar power satellite idea is perhaps the most complex and expensive proposal yet made by our civilization.


US Work

Some immediately obvious difficulties include the problem of converting many megawatts of power into a focussed microwave beam, the possible effects of the beam on people, animals and plants and its effect on the ionosphere and our weather. But the potential benefits are so great that the

United States National Aeronautics and Space Administration (NASA) and the US Department of Energy have provisionally allocated 15.6 million dollars for work on the project up to 1980, at which time it will be compared in detail with other possible energy sources. Now a bill is being considered by Congress which would increase the amount by 25 million dollars for the fiscal year beginning in October 1979.


Boeing Aerospace, Varian Associates, the Jet Propulsion Laboratory of California and the Raytheon Company of Waltham, Massachusetts are some of the companies contracted to work on the project.

Although the US Department of Energy actually manage the funds for the Solar Power Satellite project, NASA is deeply involved with the development of new launch vehicles required for putting huge payloads into orbit. NASA has already established a Solar Power Satellite Office.

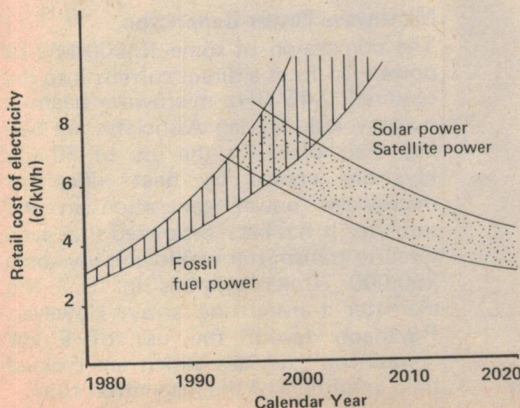

The graph at left shows how the cost of electricity generated from the burning of fossil fuels (coal, oil) will increase over the next two decades. The cost of solar power derived from the proposed satellites is likely to become an economic alternative within 15 years.

The graph at right indicates how the cost of a solar powersatellite system varies depending on the diameter of the receiving antenna (Rectenna) on earth. Optimum cost per kW is obtained from an antenna of about 700 m diameter.

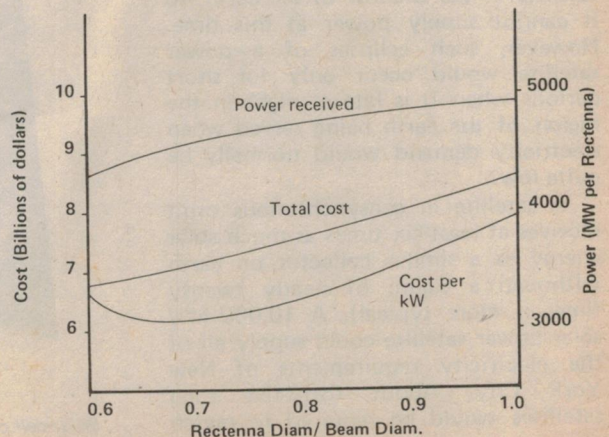

The idea of a solar power satellite was first proposed just over ten years ago by Dr. Peter E. Glaser. His suggestion was not taken very seriously at first, but NASA investigations in 1971/2 showed that it would be a feasible project. At the present time there is enormous interest in the USA in solar power satellites and campaigns are being organised to encourage the Government to proceed with the work with great haste. Peter Glaser leads a group of industrialists known as the "Sunsat Energy Council"; this Washington based Council was formed on solar power satellites. Naturally electronics manufacturers are well represented on this Council (including General Electric, RCA and Westinghouse), since such a project could bring a vast amount of work to the electronics industry.

Current Ideas

The proposals currently being considered are for a number of huge solar power satellites each providing a power level of some 10 000 MW and weighing some 108 kg (100,000 tonnes) with an area of about 100 km².

In order to place such an amount of material in orbit, it has been estimated that one would require a few launchings per day of huge Space Shuttle type vehicles over a period of a year or so. Boeing Aerospace are studying the possible effects of such launchings on the environment which will far outweigh the flights of Concorde. Launch and recovery problems may be considerable and the choice of rocket fuel may be limited by considerations of the resultant atmospheric pollution.

A solar power satellite would operate in geosynchronous orbit: this means orbiting at a rate calculated to keep the satellite apparently stationary above a point on the earth's surface. The receiving station would always be in a direct line-of-sight from such a satellite which could supply microwave energy for over 99% of its operational life. The other part of the time is spent with the satellite in the shadow of the earth, so it cannot supply power at this time. However, such eclipses of a power satellite would occur only for short periods when it is late at night in the region of the earth being served when electricity demand would normally be quite low.

A satellite in geosynchronous orbit receives at least six times as much solar energy as a similar collector on earth (although a figure of nearly twenty times is more typical). A 10,000 MW solar power satellite could supply all of the electricity requirements of New York City. About forty-five such satellites would be required to match

the present electrical generating capacity of the USA. Smaller satellites providing outputs down to 2500 MW could be economical propositions for some areas.

If it is decided to proceed with the construction of one or more solar power satellites, hundreds or even thousands of people will be working in space on the project.

Energy Conversion Systems

A number of forms of energy conversion have been studied for possible use in a power satellite, but two basic forms seem to be currently in favour. In the photovoltaic type of satellite, an array of perhaps 14×10^9 solar cells would be employed with a total area of about 24.8 km in length by 5.2 km in width (129 km²). These cells would convert the energy radiated from the sun into a direct current.

Another possible system is known as the Brayton heat engine satellite; it would employ a series of four huge parabolic-dish reflectors, each about 5.6 km in diameter and similar to the reflectors used with conventional microwave aerials. The whole satellite would stretch some 23.7 km across space. The parabolic reflectors would collect the energy from the sun and would direct it into a 'solar furnace'. Each reflector would consist of thousands of steerable, extremely thin plastic reflectors which would direct the energy into a dome-

like cavity absorber or solar furnace located near each dish.

Helium gas operating in a closed loop could be heated in the solar furnace cavity so that it passes through gas turbines and would then flow through a space radiator where the heat from the gas would be passed to the radiator for dispersion into space. The space radiator could employ a liquid metal loop with a helium/liquid metal heat exchanger. A liquid alkali metal, such as potassium, would suffer little contamination in space. The gas turbines would drive a dynamo. As there would be no gravitational force in the region, the turbo-generators could be entirely supported by gas bearings.

Power satellites using other types of conversion are possible. The possibility of using thermionic electricity does not seem to be in the running at the moment owing to low efficiency, waste heat rejection and the cost of the materials.


Both the photovoltaic and heat engine systems seem to be possible, although each has its own advantages and disadvantages. In both systems the electricity produced would be beamed to the earth as microwaves. The Boeing study concluded that the weight of either type of satellite would be of the same order, namely 80,000 to 110,000 metric tonnes for a 10,000 MW satellite.

Although the photovoltaic system is less complex, the currently available solar cells are expensive to produce and are believed to be less efficient than thermal cycle engines. In addition, Brayton heat engines have already been operated very successfully on the earth using 7 m diameter reflectors to generate large amounts of electrical energy.

At the present time it seems that a photovoltaic system using silicon cells is most in favour. Unfortunately they are subject to radiation degradation, but this can be corrected by suitable annealing. It seems likely that silicon solar cells which have spent much time in the region of the Van Allen radiation belt would require re-annealing before use in their geosynchronous orbit.

Microwave Power Generation

The conversion of some 10,000 MW of power fed in as a direct current into the required 2.45 GHz microwave beam is no easy task. Varian Associates are basing their plans on the use of 70 kW klystrons cooled by heat pipes for microwave power generation in the satellite. It has been estimated that each satellite transmitter would employ some 250,000 70 kW-klystrons in its 1 km diameter transmitting array. However, Raytheon favour the use of 5 kW "amplitron" devices which are crossed field amplifiers of the magnetron type.

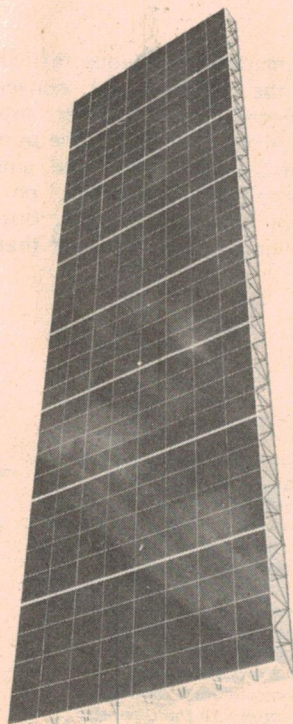

Solar-cell power arrays may be inefficient

The power transmitter design is largely dictated by the fact that it has been decided to limit the maximum power intensity in the ionosphere to 230 W/m^2 (23 mW/cm^2), since this is the best estimate of the limit below which localised heating of the ionosphere by the power beam can not exceed the heating occasionally produced by natural effects. Incidentally, the fraction of the complete atmosphere heated by the combined power beams of even a large number of solar power satellites will be extremely small.


The Microwave Beam

It is intended that the microwave power beam from the satellite used to convey energy to earth would use a frequency of 2.45 GHz and would be focused on an array of receiving aerials on the earth over an elliptical area of some 12 km by 8 km in size. The receiving area would resemble a chain link fence mounted in stripes high enough above the ground to allow agriculture and animal grazing beneath the aerials.

It has been suggested by Ralph Cherno of the Jet Propulsion Laboratory that a phased array of aerials on a satellite of a diameter of about 1 km could produce a suitable beam to the earth. Large phased transmitter arrays are required in order to produce a narrow beam which can be accurately directed. There may be two transmitters per satellite.

At the receiving station the microwave beam would be converted into direct current. A grid interface converter would then change this current into a high voltage alternating current of the mains frequency used in that region. It is probable that part of the power would be used to electrolyse water at the receiver site so as to generate the oxygen and hydrogen required for liquefaction for use as rocket fuel.

Earthbound experiments at the Jet Propulsion Laboratory have used a conventional communications receiver operating at 2.45 GHz as a beam source to direct power onto a tower at a distance of over 1.6 km. A receiving antenna was mounted on the tower; it consisted of a phased array of dipoles with each dipole connected to a diode rectifier and smoothing capacitor, the output being connected to a direct current load. An efficiency of 82.5% was obtained at a level of over 30 kW, the efficiency being defined as the direct current power delivered divided by the rf power transmitted. These experiments, which were performed a few years ago, almost abolished any doubts about the feasibility of obtaining high efficiency power transfer through the use of a microwave beam.

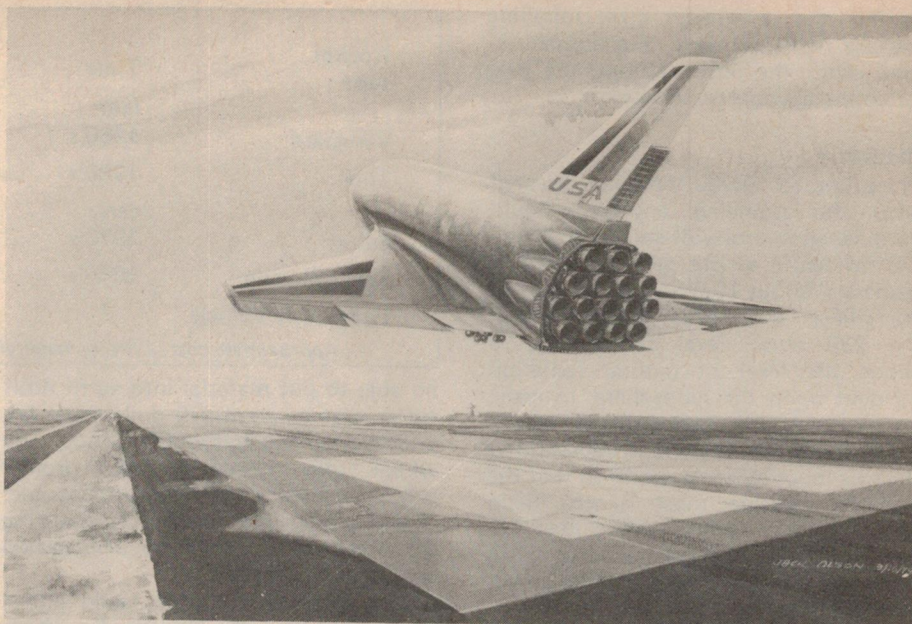

Space Shuttle type vehicles may be used to ferry materials to a 'factory' in a near earth orbit constructing a power satellite, the completed structure being moved later to a geosynchronous orbit.

A solar power satellite receiving station could also use a suitable array of dipoles and diode rectifiers; such a system is often referred to as a 'rectenna' or 'rectifying antenna'.

Accurate direction of the power beam from the satellite is essential for optimum efficiency. An error of only 1 second of arc in the direction of the beam will produce an error of about 174 m at the ground from a satellite in a geosynchronous orbit at 36,000 km above the earth.

A "retrodirective" technique is employed in which a signal transmitted from the ground station is used to measure and correct for any mechanical inaccuracies in the transmitting antenna. It is desirable that the wavefront emitted from the 1 km diameter transmitting antenna should be planar to within $\pm 3 \text{ mm}$ ($\pm 10^\circ$ phase error) for optimum efficiency. It is probably impossible to obtain such mechanical perfection, but the phase front can be electronically controlled by distributing a reference phase synchronisation signal to all of the sub-arrays from a common source on the antenna and comparing this signal with the signal transmitted from the ground.

Rectenna costs have been found to be a major factor in the overall cost of transmitting the power from the satellite to the grid. Owing to the shape of the beam intensity pattern on the ground, one can reduce the size of the antenna array somewhat in order to reduce the cost per kW collected. In other words, the outer parts of the beam contain so relatively little energy that one cannot collect it economically. The graph on the right (page 11) shows a definite minimum in the cost per kW of the

collected power for various rectenna dimensions.

Assembly Location

Boeing Aerospace have studied the possibility of assembling the parts of the solar power satellite in low earth orbit and then using the power available from the satellite itself to provide electric propulsion into a geosynchronous orbit. The main advantage of an assembly in low earth orbit is the reduction in rocket fuel requirements from 2.1 tons per ton delivered to a geosynchronous orbit to a mere 0.25 tons per ton. This greatly reduces the cost of launching the solar power satellites.

However, there are quite a number of disadvantages of assembly in low earth orbit, some of which are not easy to quantify. Boeing Aerospace feel the main disadvantage of low earth orbit assembly is the relatively long time (about 6 months) required for moving the satellite assembly from low earth orbit into geosynchronous orbit. This delay represents interest chargeable on the cost of the satellite assembly, etc. and interest charges on such enormous amounts of money cannot be ignored. Nevertheless Boeing feel that the reduction in the rocket fuel costs make assembly in low earth orbit the best technique.

Other problems associated with assembly in low earth orbit include the radiation damage of the solar power satellite components and solar cells during the relatively long time they remain in the Van Allen radiation belts, the problem of converting the assembled satellite into an electrically propelled unit, the risk of collisions with man-made objects in the low earth orbit and

during the relatively slow spiralling passage from low earth to geosynchronous orbit, the upper atmosphere drag affecting the construction work.

Hazards

The proposed 10,000 MW beam directed onto the receiving antenna should produce an intensity of some 230 W/m² (23 mW/cm²) at the centre of the rectenna and about 10 W/m² at the edge of the ellipse. It is rather surprising that the 230 W/m² level corresponds to about the level of natural radiation incident upon the ionosphere. Investigations have been made into techniques for reducing the amount of radiation in the side lobes by some 45 dB so that the intensity outside most of the main rectenna area is seldom more than 0.1 W/m². Offshore rectennas have been proposed for use in areas of high population density.

It is claimed that birds and aeroplane passengers would be able to pass directly through the main beam without any harm, owing to the low beam intensity. Presumably aeroplane passengers would be fairly well screened from microwave radiation anyway by the metal body of the craft. Peter Glaser has commented: 'I have made a standing offer to provide the wine and salad to anyone who promises to eat that duck that flies through the beam — cooked or not!'

Biological tests are to be conducted to ascertain if a microwave beam of 230 W/m² produces any effect on birds and flying insects at the 2.45 GHz frequency. Similar tests will be performed at 10 W/m² on plants and animals. One wonders whether biological tests at much higher intensities have yet been performed.

Perhaps it is rather remarkable that the rectenna arrays will be suitably elevated to permit frost-free farming or other re-use of the land area. The field strength below the rectenna should be less than the currently recommended maximum US exposure level of 0.1 W/m².

Experiments are planned to test the effect of very high power microwave beams from the huge Arecibo antenna on the ionosphere. These experiments will be carried out with the express purpose of checking that the solar power satellite beam will not produce any deleterious environmental effects.

Heavy Lift Vehicles

The cost of the launch vehicles for placing heavy parts in low earth orbit ready for assembly forms one of the major items of a solar power satellite budget. The Boeing study assumed that a new launcher known as the 'Heavy Lift Vehicle' will be developed which should

Rocket type	Time	Dollars/kgm	Typical load
	late		
Vanguard	1950's	1.1 x 10 ⁶	9 to 14 kg
Thor	1960's	22 x 10 ³	450 kg
	early		
Saturn	1970's	1.4 x 10 ³	110,000 kg
Space Shuttle	1980's	330	
Heavy Lift Vehicle	?	20-30	500,000 kg

Approximate cost of lifting material into earth orbit at various times.

be able to put material into earth orbit for a cost of about 20 dollars per kg. Without such a heavy lift vehicle, the whole solar power satellite project would become economically impossible. The enormous fall in the cost of putting material into earth orbit is well illustrated by the table above.

The heavy lift vehicle could either have wings like the Shuttle (in which case it could land on the ground like an aeroplane even without using any of its motors) or alternatively it could be a vehicle without wings rather like the Saturn rocket which would have to return to earth by splashing down in the sea. It seems likely that the type of vehicle without wings will be favoured for heavy loads according to current ideas. The Boeing report shows a Saturn type vehicle 72.98 m in height and 32.68 m in diameter at its base.

The European Outlook

The energy requirements of Europe have been studied by the OECD and it is felt that about fifteen 10 000 MW solar power satellites could supply all of Europe's requirements for 1980. (The total number required for the world has been estimated as about sixty-nine.) The total *developmental* cost (not including operation) of a solar power satellite has been estimated as being of the same order as the total investment already made in North Sea oil by European nations.

The problems in Europe associated with a solar power satellite programme are not identical with those in the USA, largely owing to the different population densities. In the highly industrialised regions of Europe (where power consumption and population densities are greatest), there is normally little land to spare for the huge rectenna arrays together with any surrounding safety areas which may be desirable. The low electrical power demand in rural areas and the high cost of conveying power over large distances may render it uneconomic to place rectenna arrays in these rural areas, so some compromise must be sought in choosing the optimum regions for the siting of rectennas.

It is, perhaps, quite amazing that the

USA has set a limit of 10 mW/cm² as the maximum safe exposure of people to microwave radiation, whereas the upper limit in the USSR is one thousand times smaller, namely 0.01 mW/cm². It is certainly true that exposure to intense, non-ionising radiation at radio frequencies can produce internal heating of biological tissue and this can produce damage if the heat cannot escape rapidly enough for a reasonable equilibrium temperature to be obtained. However, scientists are not yet certain whether other adverse effects than those due to mere heating are also present when personnel are exposed to intense microwave beams. In Western Europe the US standards are applied in radar stations, etc., but it would seem to be highly desirable that the biological effects of microwaves be more intensively investigated so that various countries no longer have a factor of one thousand differences in their safety standards.

International Enterprise

Work on solar power satellites is one of those major technological enterprises which should stimulate international participation and co-operation. The microwave beams can be received in all countries with latitudes between about 65°N and 65°S without any great loss of efficiency. The beam is virtually unaffected by even the heavy rain clouds so often found over many parts of the earth.

One may feel that the use of solar power satellites would not be an economical proposition in countries where the population density is not very high. However, one should remember that once a number of solar power satellites have been placed in geosynchronous orbit, the cost of placing any other such satellites in orbit will be much reduced.

One must not forget the disadvantages of establishing a world-wide solar power satellite system. Such a system would inevitably cause interruption of communications on the 2.45 GHz frequency. However, the enormous power radiated from a power satellite would result in considerable interference not only in the 2.45 GHz band, but also in a relative-

ly wide frequency band around this region and in frequencies which are harmonics of 2.45 GHz. Apart from this problem, increased radio frequency noise is likely to be produced by the microwave energy absorbed by the ionosphere which results in a raised electron temperature in this region. There would also be interruptions in the radio frequency communications links with aeroplanes or satellites whilst they cross the microwave beams from the power satellites, but doubtless other frequencies or laser beams could be used to overcome this problem.

It seems likely that the equivalent of 1000 or more Saturn V launches would be needed to place one solar power satellite into geosynchronous orbit. The total mass sent into space in a project of this type would easily exceed an astounding 10^6 tonnes/year!


It has even been advocated (by the *L-5 Society, 1620 N. Park Av., Tucson, Arizona, 85719*) that the materials already in space should be used to make most of a solar power satellite in order to minimise transport costs.

Other Requirements

A maintenance vehicle would be needed to maintain and re-supply solar power satellites in geosynchronous orbits — possibly a couple of journeys to each satellite per year. If many solar satellites were in use, a maintenance base in geosynchronous orbit would be justified — especially as it could be used to maintain communications satellites and other non-power craft.

During the construction phase of a solar power satellite (either in low earth orbit or in a geosynchronous orbit) living accommodation must be provided in space for the workers. As the cost of human labour in space will be exceedingly high, intensive studies are in progress to promote the automatic assembly of large structures in space.

Artists impression of a 'Rectenna' used to receive and convert the microwave energy, from the power satellite, to usable electric power.

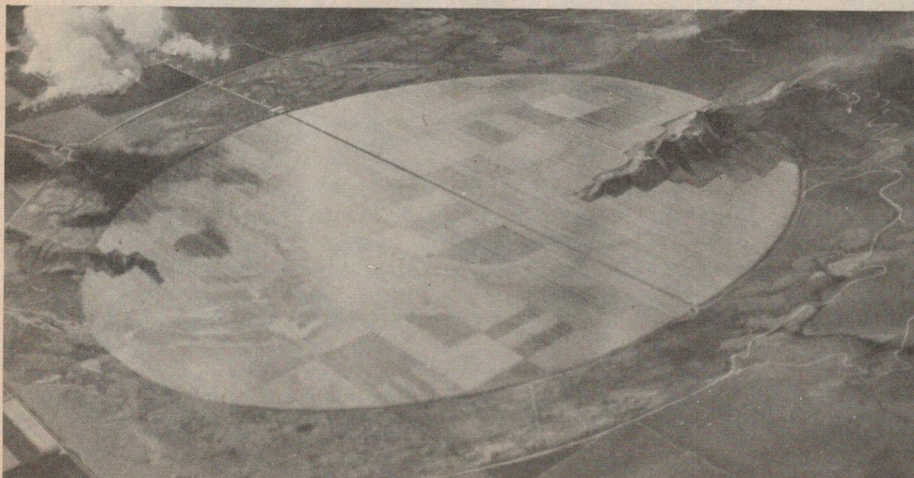

Microwaves from Iceland?

The Icelandic Government are currently looking into the possibility of marketing electrical energy generated from their abundant geothermal sources. This energy would be converted into microwaves and distributed to the industrial nations by satellite. A consultant with Rockwell International, Dr. Krafft Ehrliche, proposed this idea in 1969, but objections to its development include the high incidence of earthquakes in Iceland and the fact that the country cannot itself pay for the developmental work involved.

In order to develop this system, Iceland would require a primary energy power plant, a transmitter array system, a power relay satellite and distributed receiving plants. A transmitter power of 3,000 MW is proposed with a possible expansion to 7,000 MW. Perhaps it is rather amazing that the use of underground nuclear explosions has been suggested for increasing the amount of hot rock for steam production.

A transmission frequency of 2.4 GHz is planned with phase shifters to maintain beam coherence in the event of thermal stresses or minor earth perturbations. More than 67 million antenna elements would be required extending over a 65 km^2 area. The satellite would be positioned over the equator directly south of Iceland in geosynchronous orbit. It would have a surface area of 1.5 to 4 km^2 consisting of finely polished surfaces which would act as passive reflectors of the microwave energy. The transmitted beam would be only 16.4° above the horizon, but the satellite could relay energy to Western Europe, Africa, nearly all of South America and the Eastern coast of the United States. Rectenna systems of some 25 km^2 area located near industrial centres would receive the power. An end-to-end transmission efficiency of between 51% and 67% has been predicted.

Conclusions

The need for a non-depletable energy source for the next century is undisputed. Many scientists believe that if the necessary funds are made available quickly, energy could be provided by solar power satellites by about the mid-1990's. The estimated cost of solar satellite produced power is 1700 dollars/kW as against 1400 dollars/kW for power from conventional nuclear power generators. However, the effective cost of satellite generated power will decrease with time, since solar satellites require no fuel and relatively little maintenance. In addition, the cost of fossil fuels will doubtless continue to rise as sources are depleted. The trend of rising fuels costs and falling solar satellite power costs is illustrated in the graph, but obviously all cost estimates are subject to wide variations.

The possibility of power transfer over large distances by satellite is well illustrated by the Iceland geothermal power example. However, one of the objections to power satellites is that of security. If a nation relies on solar power satellites for a major part of its energy, how could its factories operate if its power satellites were destroyed in a war? At the present time the main objection to the speeding up of the solar power satellite programme seems to be environmental health and safety considerations together with the problems associated with rocket launching and recovery operations and the enormous cost of the complete project.

The construction, in space, of equipment the size of a city is quite beyond our present experience. It is not, however, so very far beyond the present state of our art as to be a practical impossibility. No new technological developments are required — only an expansion of current technologies. First of all we must break through the psychological barrier which has convinced us that it is virtually impossible to put a satellite the size of a city and the weight of a battleship into orbit.

If you had perhaps 1,000,000 million dollars to spend, would you choose to use it on a multi-solar satellite power project, relief for the underdeveloped countries, cancer work or perhaps some other project? Sooner or later decisions of this type must be made about the solar power satellite work. It seems likely that many vital decisions will be made in the USA when the results of the 1980 status report requested by NASA and the US Department of Energy are known.

The author is indebted to Mr. William A. Rice of Boeing Aerospace, Seattle, for the information and photographs which he has kindly provided for this publication.


Why most other record cleaners
are victims of their own design.



THE SONIC BROOM™ RECORD CLEANING SYSTEM

Look at almost every record cleaning brush on the market. You'll see a pad completely covered with closely packed fibers sticking out, intended to trap surface debris as they rub across the record surface.

Now look at the new Audio-Technica Sonic Broom cleaner. Lots of closely-packed fibers alright, but we skip a whole row, every fourth row. Which may make a funny looking pad, but a superior cleaner.

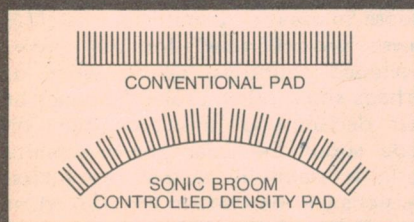

There are several reasons for our effectiveness: By skipping every fourth row, the Sonic Broom pad gets deeper into each groove without excessive pressure on the record surface. If we had more tufts—like most of the others—the Sonic Broom fibers might do a great job of cleaning the surface *between* the grooves, but never get to the very bottom where foreign matter can build up and destroy good sound.

Our varied tuft spacing also permits dislodged particles to migrate further from the tips of the cleaner fibers during cleaning. Without those gaps, the loosened particles would stay right at the ends of the fibers where they are easily redeposited somewhere else on the record. And you want to *remove* dust...not just move it around.

The differences don't stop with our fibers. The shape of the Sonic Broom pad has been carefully designed to make it easy to hold, easy to use correctly. The curve insures that just the right amount of cleaning area is in contact with the record at any time for maximum effectiveness. And the rigid backing, unlike soft pads, helps insure that the fibers don't simply collapse under pressure but are directed deep into every groove.

And how well does the Sonic Broom system clean, once the fibers reach the bottom of the groove? Very well indeed, since each tiny fiber is so small (about 6 microns or 0.00025" in diameter) that dozens can work side-by-side, contacting the entire groove wall surface. Even the smallest dust particles can't escape the repeated brushings.

Australian distributor:

MAURICE CHAPMAN AUST. P/L.

44 Dickson Ave, Artarmon. 2064. Tel: 438-3111.

State distributors: Adelaide 272-8954 • Melbourne 818-1730 • Brisbane 376-3931 • Perth 446-5679

 **audio-technica**
INNOVATION • PRECISION • INTEGRITY

SOUND

with Wally Parsons

MOST READERS, I'm sure, are aware of the importance of wide bandwidth, and of flat response. Modifying frequency response by boosting or attenuating certain frequencies produces a change in tonal character, but often the results are quite different from what is expected. Thus a high frequency boost might add harshness rather than brightness to the sound, or reducing the midrange can produce boominess, rather than spaciousness. And yet, large changes in response in some areas of the spectrum may produce only slight variations in overall sound or in the tonality of certain instruments.

This can be quite perplexing and frustrating when setting up a multi-way speaker system, for example, and finding that no matter how the different drivers are balanced, it never really sounds right, so that vocal recordings may have just the right amount of presence (although still lacking that elusive quality of "realism"), and orchestral music becomes brittle, and lacking in fullness.

What You Hear

An examination of the audio frequency spectrum, the musical scale, and auditory response reveals greater complexities than commonly believed.

The human auditory system is responsive to frequencies between about 20 Hz and 15kHz, sometimes higher in young persons, and deteriorating with age, assuming the system to be in healthy condition. Acuity tends to be greatest around 200 Hz to 5 kHz. The musical scale, as represented on a standard 88 key piano extends from 27.5 Hz for a bottom "A" to 4180 for a top "C". Above this we find high harmonics (including some speech articulation sounds) and high transient sounds. The most active region for instrumental music tends to be from about 110Hz (A_2) to 880 Hz (A^1), a range of three octaves. The human voice also is placed in this range extending downward to about 80 Hz for a Basso up to just over 1 kHz for a Soprano. Obviously, what happens in this three-octave band is of considerable importance.

The Middle

One assumption which is almost an axiom, especially with respect to loudspeakers, is that the extreme lows and highs are very difficult to reproduce, therefore the midrange can generally be left to take care of itself. Nothing could be further from the truth and the realization of this on the part of the designer has made many an unspectacular looking speaker sound eminently listenable. A typical three-way speaker with cross-overs at 500 Hz and 5 kHz demands that the mid-range unit cover a decade bandwidth, and the woofer a decade or even more, with the cross-over in the middle of the most critical portion of the mid-band.

A prominent rise in the lower part of this band can give rise to a boxy kind of sound, whereas a dip can produce a quantity of thinness. Excessive response in the bottom part of such a midrange unit (that is, just above 500 Hz) produces a muffled and constricted quality, while a broad suck-out may add a certain spacious, or airy quality, which seems better defined, yet actually lacking in detail. If woofer and midrange are not matched in level at the crossover we have the additional phenomenon of hearing abrupt level changes through the musical scale. Indeed, most major differences in sonic character between speakers can be attributed to relatively small differ-

ences in this lower midrange, largely due to differences in the compromises made in the relationship between drivers.

A Little Higher

Above the mid-range lies the upper mid-range, sometimes called the lower treble, covering the octave between 2500 Hz and 5000 Hz. Because of the ear's extreme sensitivity in this region, relatively small level changes can have a profound effect on the quality of "presence" or forward placement of voices and individual instruments. Moreover, this octave is predominantly harmonics, especially of the female voice and the upper musical registers, thus the harmonic structure and therefore the tonality of much of the music is profoundly dependent on this region. Too much level here can cause harshness, or brittleness. But if response is ragged we may have a choice of either excessive harshness, or lack of presence, but never "just right".

A Little Lower

Below the midrange lies an octave from about 160 Hz to 320 Hz which forms the upper bass region. This region is especially affected by speaker placement relative to the floor. Too low a placement accentuates response producing boominess, while too high a location results in thin bass. Both qualities contribute to listener fatigue and are particularly common to moderate size speakers of the kind a little too large for a bookshelf and too small for the floor. Also in this region lie the second harmonic of the low male speaking voice and some fundamentals of the tenor and female speaking voice, so anomalies in this region can do some strange things to speech tone.

It may come as a surprise to learn that most bass fundamentals occur in the next octave, that is down to about 80 Hz, the lower limit of the trombone, and the full range of tympani. The double bass has an additional octave to 41.2 Hz and the piano goes down another major sixth to 27.5 Hz. Thus, response which rolls off below 80 Hz will lose little of the bass fundamentals. However, room resonances (both listening room and studio) may appear in this region, and much of the ambience of the performance which is responsible for that feeling of solidity which characterizes a very wide range system. Unfortunately, rumble and other undesirable effects also live down here and the removal of such mud will actually improve the feeling of solidity.

The region just below 100 Hz, as well as the upper bass, also contains many of the fundamentals of the speaking voice, and a boost here will give rise to "chestiness".

Near The Top

Finally, a leap up to the highs, from about 5 kHz up to 20 kHz. Up here we find only the harmonics of tonal instruments, and fundamentals of such percussive instruments as cymbals, castanets, etc. Variations in response in the first octave (5 kHz to 10 kHz) affect brightness, especially around 7.5 kHz, and is most noticeable on strings, high woodwinds, soprano voice and sibilants. Many low compliance pickups begin to lose trackability in this range, which is why it shows up first on sibilants. Also, since it is so close to the commonly used cross-over of 5 kHz, interactions between mid-range and ►

SOUND

tweeter drivers, and cross-over design faults influence the reproduction of such signals. Beyond brightness lies stridency and shrillness, but, conversely, harshness can often be controlled by bringing down the response in this region. Some slight boost can also effectively extend the useful range of older recordings and AM (and even some FM) broadcasts.

The final octave, from 10 kHz to 20 kHz is important for the quality of airiness and realism imparted, provided there is actually some signal to reproduce, which is less often than we would like: A rising response here can accentuate noise and irregularities in pick-up performance, while a gradual roll-off, especially in conjunction with the next octave below will often do a remarkable job of reducing noise without severely degrading signal quality.

SOUND BRIEFS

Philips Videodisc on market

Philips have honoured their promise to market their long-awaited optical Videodisc system — before the end of 1978. A small quantity was offered through three stores in Atlanta, Georgia in the very last few days of last year.

The units carried a list price of US\$695 (approx A\$600). About 200 various records were listed, ranging from US\$6.00 half-hour informational recordings (Better Tennis in 30 Minutes) — to US\$16 for current feature films. Even a specialty film such as a full-length 'Mikado' was only US\$20.

Not that many private buyers managed to obtain anything — apparently virtually all units were bought by people from rival manufacturing and marketing companies!

Best is better

The 'best' tape for any given cassette recorder has operating parameters which closely match the bias, equalisation, sensitivity preset by the manufacturer of the recorder in which the cassette is to be used.

These settings vary considerably so it's rare for a cassette recorder to deliver the performance which is inbuilt — unless the manufacturer's recommended cassettes are used.

Recognizing this problem, JVC have introduced their KD-A8 cassette deck which has an inbuilt microprocessor that optimises bias, equalisation, and sensitivity for all types of tape formulation.

The microprocessor arranges for a test tone to be recorded onto the cassette — then chooses the best of 15 levels of sensitivity, seven levels of equalisation and no less than 32 levels of bias. It then erases the test tone and winds the cassette back to the start — **all within 25 seconds!** If the cassette is so bad that it's unacceptable the machine flashes an 'error' light.

JVC call the automatic adjusting system 'BEST' (bias, equalisation, sensitivity, total).

Edison update

Toshiba has developed a fixed-head video recorder featuring a cassette with a single reel of endless tape — it's a sort of planar magnetic equivalent of Edison's cylinder gramophone.

The 100 metre tape loop has 220 tracks across its surface, it runs at six metres a second providing one hour's playing time. An interesting feature is the use of an inbuilt microprocessor which enables the user to have random access to individual tracks. The prototype takes 20 ms to traverse one track pitch.

According to Toshiba the device is suitable for both consumer and professional applications.

BSR buys DBX

BSR (USA) Ltd has agreed to purchase DBX Inc., manufacturers of top-end consumer, semi-professional and professional audio equipment.

We understand that the sale price was US\$8 million, and that whilst DBX will become a BSR subsidiary, the existing management will be retained.

Play With It

Readers with graphic equalizers might wish to experiment with them, altering the balance of several octaves at once to observe these effects. Similarly, consideration of these effects should prove useful in setting up multi-way speaker systems. In my own experience I've rarely encountered such a speaker which has been set up properly or gave any indication that the user knew what he was doing. Especially common is the practice of cranking up the tweeter in the mistaken belief that in operation it should definitely make its presence known. Or reducing both mid-range and tweeter to bring up the bass. All that happens, of course, is that the sound is boomy and muffled. In fact, if bass and mid-range response are matched and level, the result is actually an *increase* in perceived bass, because by setting up the correct relationship between fundamental and harmonics, the bass instruments become more prominent to the ear-brain system. ●

SHAWMUT®

Electronic
Components
and Materials



STATE OF THE ART FUSES

Electronic products are becoming increasingly sophisticated, and Shawmut engineers work closely with "state of the art" circuit designers to meet and exceed the protective needs of their products.

The Form 101 series of current limiting rectifier fuses protects semiconductor power diodes (rectifiers), thyristors, triacs and other solid state devices against short circuit faults to which they are particularly susceptible because of their intrinsic low overload capability. Short data is listed below.

These Shawmut fuses are available off-the-shelf in a range which can meet your most critical specifications.

The popular "One-time" switch and panel fuses and the "Trionic" dual-element motor starting and protection fuses are also listed. Many other fuse series are available for electrical applications.

For details of the full and comprehensive range of Shawmut fuses contact:
Philips Electronic Components and Materials,
P.O. Box 50, Lane Cove, N.S.W. 2066
Ph: (02) 427.0888



SHAWMUT FUSE DATA

Fuse Type	Amp. Ratings	A.C. Volts	Dimensions	U.L. Class	Interrupting Rating A.C. RMS Amps	Where Used
ONE-TIME	1-600	250 600	N.E.C. Holders	K-5	50,000	Switches, Panelboards fusible equipment
TRIONIC Dual Element	1/10-600	250 600	N.E.C. Holders	RK5	200,000	Motor starting and protection.
AMP-TRAP Form 101 Rectifier fuses	1-10,000 1-5000 1-2000 35-1600 20-1600 20-1600 20-800 20-800 20-600 20-600	130 250 600 500 700 1000 1200 1500 2000 2500	Clip or Bolt Mounting	*N.A.	200,000	Semi-conductor, rectifier, diode, SCR protection. D.C. power supplies Inverters U.P.S. systems Controls Variable speed drives Mine power supplies Special applications, A.C. or D.C.

*Not applicable

AVAILABLE THROUGHOUT AUSTRALIA FROM

CEMA

AND


SOANAR

PHILIPS

153.0241

Jaycar New Audio Kits and Components

AUDIO SPECTRUM ANALYSER

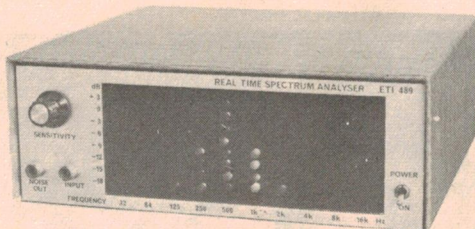

The 489 Analyser can be used in conjunction with a Graphic Equaliser to accurately equalise systems for room acoustics.


Features:

- Ten octave spaced displays.
 - LED readout in 3 dB steps.
 - Input sensitivity control.
 - Inbuilt pink noise generator.
- Complete kit includes matched LED's, polarised plastic display, complete metalwork, etc.

ONLY \$142 plus \$3 freight.

Please include stamped, addressed envelope with all enquiries

485 GRAPHIC EQUALISER

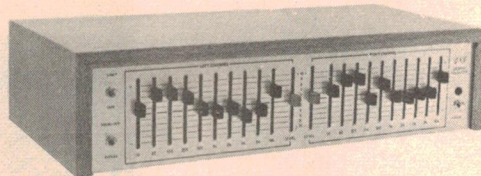

- 10 adjustable controls on one octave centre frequencies (independent for each channel).
- Symmetrical mirror image boost and cut of 13 dB at any centre frequency.
- Full spectrum gain control for each channel with a range of 14 dB gain to 9 dB attenuation.
- Vertical slide controls give a graphic representation of the resulting response curve.
- 100 percent monolithic active circuitry. Hum, ring and saturation free gyrator design.
- Facility for tape monitoring.
- Optional standard 19" rack mounting adaptor available.

COMPLETE KIT \$118 P&P\$3.

jaycar PTY LTD

PO Box K39, Haymarket.
NSW. 2000. 405 Sussex Street,
Tel: 211-5077.

Some of AUSTRALIA'S LOWEST COMPONENT PRICES

Note:: Regular Prices not temporary specials — keep us in mind for that next order.



POTS 38c
(LINEAR 1/4" ALUM. SHAFT)

Linear potentiometers
rotary carbon 38c ea.
500 Ohm, 1K, 5K, 10K,
25K, 50K, 100K, 250K,
500K, 1M, 2M.

Quality Large red LEDs well diffused
wide viewing angle.
17c each, \$1.50 per 10, \$110/K
Quality MOUNTING CLIPS 5c ea.
\$4/100

LEDs

\$12 a 100
17c each



TRIMPOTS 15c
(10mm)

Values: 100, 250, 500 Ohm.
1K, 2K, 5K, 10K, 25K, 50K,
100K, 250K, 500K, 1M, 2M

Trade govt., S.T. exempt welcome.
Send for special lists (e.g. \$26 a 100
pots and \$99 a 1000 LEDs plus tax if
applicable. Small quantities also.

TRADE ENTRANCE



METAL CAN TRANSISTOR BC 108 - 13c
10 for \$1.20
100 for \$11

1 Amp. DIODES
50V 1N4001 - 6c
100V 1N4002 - 7c
400V 1N4004 - 8c
1000V 1N4007 - 12c
10% off 100 SAME

\$4 a 100 SIGNAL DIODE IN4148
\$30 a 1000 5c each

ZENER DIODES: 15c each 400 mW 5%
E24 values 3V to 33V



5c ELECTROS (UPRIGHT)


(per 100 prices in brackets)
Cap. 16V 25V 50V
0.47 uF thru to all all all
10uF 5c(\$3 1/2) 6c(\$3 3/4) 7c(\$4)
22uF 6c(\$3 3/4) 7c(\$4) 8c(\$5)
33uF 8c(\$4) 9c(\$5) 10c(\$6)
47uF 9c(\$5) 10c(\$6) 11c(\$7)
100uF 10c(\$8) 12c(\$7) 14c(\$11)
220uF 12c(\$8) 16c(\$10) 35c(\$17)
470uF 16c(\$12) 22c(\$16) 45c(\$30)
1000uF 22c(\$18) 30c(\$25) 75c(\$50)
1000uF/16V axial — 20c ea. \$8 per 50
2200uF/50V PCB — 95c ea \$9 per 10
Full axial price list — SAE



5c POLYESTER FILM CAPS

E12 10% 100V
ALL VALUES .001 to .01 — 5c ea.
10% off 100 same uF

.01 — 5c 1 — 10c
.012 — 6c 12 — 11c
.015 — 6c 15 — 12c
.018 — 6c 18 — 14c
.022 — 6c 22 — 15c
.027 — 6c 27 — 16c
.033 — 7c 33 — 18c
.039 — 7c 39 — 19c
.047 — 7c 47 — 20c
.056 — 8c
.068 — 8c All values
.082 — 9c in uF
10% off 100 same uF




SCRs C106Y1 40c C122E \$1.20

SCRs:
0.8A 30V C103Y — 35
0.8A 200V C103B — 60
4A 30V C106Y1 — 40
4A 400V C106D1 — 75
8A 400V C122D — \$1.05
8A 500V C122E — \$1.20

TRIACS:
2A 400V ESP240 — 65
6A 400V SC141D — \$1.30
10A 400V SC146D — \$1.50
DIAC ST2 — 35
Chart to identify leads
Plus trigger info. — 10c

25 A 400V
SC260D TRIAC C37D SCR EA. \$2.50



2c RESISTORS 1/4w
\$1.80 per 100
SAME RESISTANCE

Our 3 year old price still current.
Opposition hoped we would go
broke but our price remains at
2c ea.
1 Ohm to 10 M 1/4w 5% E12
carb. film.

APPROX. SIZE:
1/2W miniature metal glaze
1 Ohm to 1M 5% E12
1M2 to 10M carb. film (larger)

RESISTORS 3c
\$2.50 per 100
SAME RESISTANCE

Keep electronics a hobby and not a luxury, compare our prices and buy from us. Same day turnaround service (unless swamped). All goods top quality and new. No minimum order. One P/P charge of 45c regardless of quantity. Advert current 3 months for late readers. Price list No. 9.

DIGGERMAN ELECTRONICS

P.O. BOX 33, CORAMBA, N.S.W. 2466




PHONE

PROFESSIONAL AUDIO EQUIPMENT

PHONE MONO/STEREO GRAPHIC EQUALIZER

THE NEW 'PHONE' 20 ELEMENT $\frac{1}{2}$ OCTAVE EQUALIZER (25Hz to 19.2KHz) IS A SOPHISTICATED ELECTRONIC UNIT, DEVELOPED AFTER INTENSIVE RESEARCH INTO TODAY'S PROFESSIONAL REQUIREMENTS, DESIGNED TO PLAY AN INTEGRAL PART IN RECORDING STUDIOS, SOUND REINFORCEMENT AND HI-FI EQUIPMENT.

- BALANCED AND/OR UNBALANCED INPUT/OUTPUTS.
- 14dB CUT AND BOOST (± 1 dB).
- CONVENIENT CENTRE STOP SLIDE CONTROLS.
- SIGNAL TO NOISE BETTER THAN -80dB.
- OUTPUT LEVEL ± 18 dBm. (MAX.)
- OPTICAL LED VU DISPLAY.
- 19" RACK MOUNT.
- OPTIONAL WOOD GRAIN CABINET FOR HI-FI USE.
- CHOICE OF SILVER OR BLACK BRUSHED FACE FINISH.

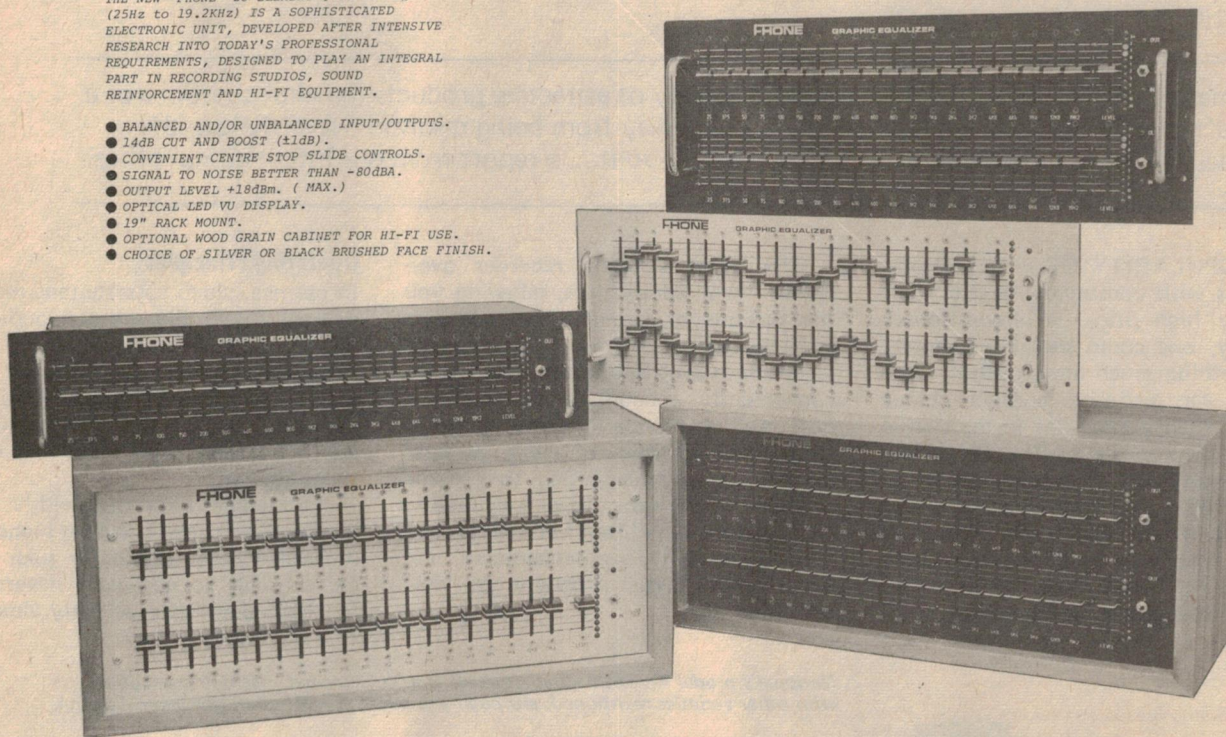

PHONE DELUXE DISCO

DESIGNED FOR RELIABILITY, APPEARANCE AND GUTSY PERFORMANCE, WITH UNIQUE ACOUSTIC FEEDBACK ELIMINATING CHARACTERISTICS.

- 250W RMS POWER AMPLIFIER.
- 2 x 3 WAY EXTENDED 45/60 VERTICAL OR HORIZONTAL SPEAKER UNITS, EACH CONTAINING 1 x 15" RCF SPEAKER, 1 x 100W 90° HORN, 2 x HIGH FREQUENCY RADIATORS.
- 3 WAY INTERNAL MUSIC MODULATED LIGHT SHOW.
- OUTLETS FOR EXTERNAL LIGHT SHOW (600W PER CHANNEL).
- RAP AROUND CONSOLE.
- 3 CHANNEL AUDIO MIXER - CHANNEL A, CHANNEL B, MICROPHONE.
- INPUT FOR AUX. SOURCE. e.g. TAPE DECK, CUEABLE ON CHANNEL A OR B.
- LED VU DISPLAY ON MIXER OUTPUT.
- HEADPHONE CUE PROVISIONS.
- 2 x 4W RMS HEADPHONE CUE AMPLIFIER.
- CROSS FADE SLIDE CONTROL.
- CROSS FADE BYPASS SWITCHES.
- FITTED WITH SHURE M55E MAGNETIC CARTRIDGES.
- HEAVY DUTY BLACK VINYL DESK TOP.

(4 WAY ELECTRONICALLY CROSSED UNITS ALSO AVAILABLE)



For further information

contact:

PHONE AUDIO Pty. Ltd.
20 Main St. UPWEY, Vic. 3158.
Ph (03) 754-2572, (03) 754-6268.

AGENTS:

ZEPHYR PRODUCTS
70 Batesford Rd. CHADSTONE,
Vic. 3148. Ph (03) 568-2922.
LIVE MUSIC SYSTEMS
89 Crown St. EAST SYDNEY,
NSW. Ph (02) 31-9111.

Video Cassette Recorders

While manufacturers storm the market with a variety of attractive products the vital questions of a 'unified' recording format and copyright are a long way from being resolved. Nevertheless, the equipment beckons, what will it do and how does it do it.... a report from our international offices.

THE POPULARITY OF video cassette recorders with consumers, despite their relatively high price, is unquestioned. Certainly, one could spend the money on something much more useful — like another car, or even another colour TV set! Their appeal lies in the virtual 'library' facility they offer. Most television shows are evanescent things — fading quickly in your crowded memory, and if you miss a particularly interesting program you've little hope of catching it again. Also, where two programmes clash in time, you must miss one.


The video cassette recorder overcomes these annoyances, allowing you the options of permanently recording an important (to you) programme or recording a programme that may be inconveniently scheduled for you but need not be kept after viewing. Apart from that, libraries of video cassette programmes are beginning to become available — one can rent or buy feature films (black & white, full colour and 'blue'!) as well as entertainment and documentary type programs to view at home.

Operating Principles

In essence, video cassette tape recorders operate much like normal audio tape recorders, only umpteen times more complicated. The bandwidth of a normal audio channel ranges up to about 15 kHz, while that for television pictures is about 5.5 MHz — some 350 times greater.

To enable high bandwidths to be recorded, the tape is run at higher longitudinal speeds. Obviously such speeds are difficult to obtain — nevertheless, the BBC developed an early video tape

National's model NV8600 video cassette is a VHS format machine compatible with other varieties mentioned, although it is made to a different mechanical design.

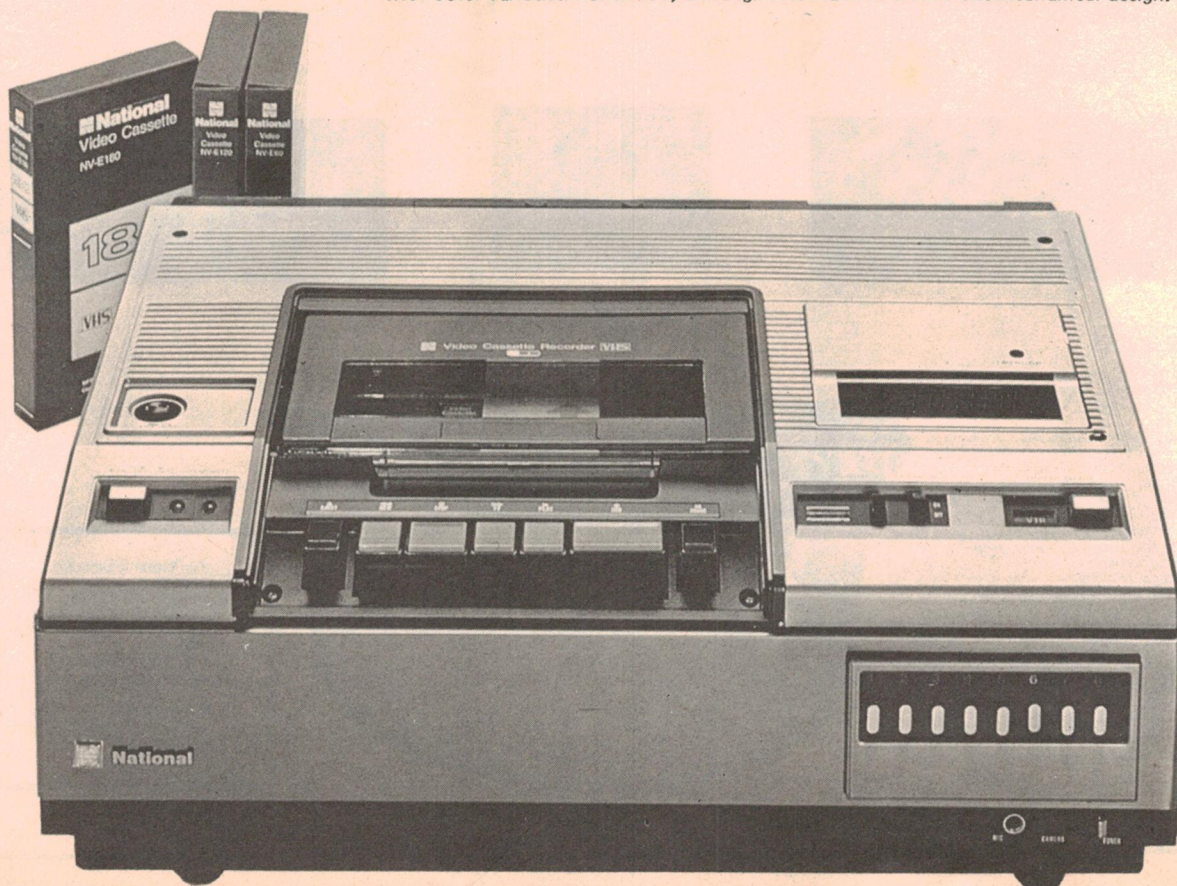

recorder, called VERA, in the 1950s which ran tape at 5000mm/s (200 in/s) that was superseded very quickly by one developed in America by Ampex.

Although 25 years old, the mechanical transport format of the video tape recorders used by broadcasters today is identical.

The principle of video recording is simple. A 13mm wide tape is used in consumer machines. The video recording heads rotate at high speed, relative to the more slowly moving tape, thus laying a large number of long tracks at an angle across the tape (Fig. 1).

Audio is recorded as a separate longitudinal track, much like a normal audio tape recorder, and a third, control track is also recorded. This provides identification of the position of each video track so that when replayed the video tape can be precisely positioned, otherwise the video heads might not cover the same path as those during the recording.

Early video tape recorders used open spools of video tape in much the same way as tape recorders, but the complex rotating head assembly meant that threading was making it impractical for consumer use. The video cassette was developed to overcome this.

Although insertion of the cassette is simply accomplished, the video cassette recorder then has to remove tape from the cassette and thread it around the rotating video heads. When the cassette is inserted, the video tape is located

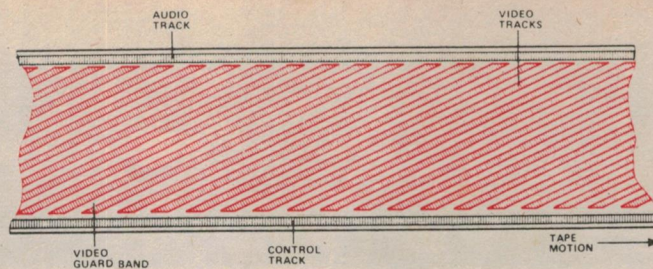


Figure 1. The video recording head rotates at high speed, laying down diagonal tracks. Audio and control tracks are recorded parallel to the tape travel direction. Most systems have a recording format similar to this, although the Beta system has adjacent tracks touching — see text.

behind four guides mounted on a platter that is rotated by a small motor. The tape is located around half of the head drum which houses the rotating video heads. There are actually two video heads, on opposite sides of the drum, which record alternate video tracks.

The audio and control tracks are recorded on a conventional looking audio head (but rather wider to cover both edges of the half inch tape) and a separate erase head covers the whole tape width. This type of tape threading, where guides rotate, is used on most video cassette recorders but has the disadvantage of requiring a few seconds to thread. With this in mind, JVC developed a slightly faster loading system, somewhat less mechanically complex, using two parallel guides moving in a single direction.

Because of these complex requirements for threading and rotating heads, video cassette recorders are extremely complex machines with a vast number

of expensively produced mechanical parts including at least three separate motors (tape drive, rotating head drum drive, and threading). This is the primary reason why the price of video cassette recorders is unlikely to be reduced significantly in the future.

Electronics

The problems of recording colour television pictures economically took many years of research. It was only in 1973 that the first consumer oriented video cassette recorder was introduced by Philips. Late 1977 saw the introduction of the 'second generation' of video cassette recorders. These brought considerably improved recording time and are the subject of this article.

Figure 2 is a block diagram of the basic signal processing circuitry in a consumer video cassette recorder. Since domestic television receivers have no facilities for video inputs or outputs, the video cassette recorder must be designed


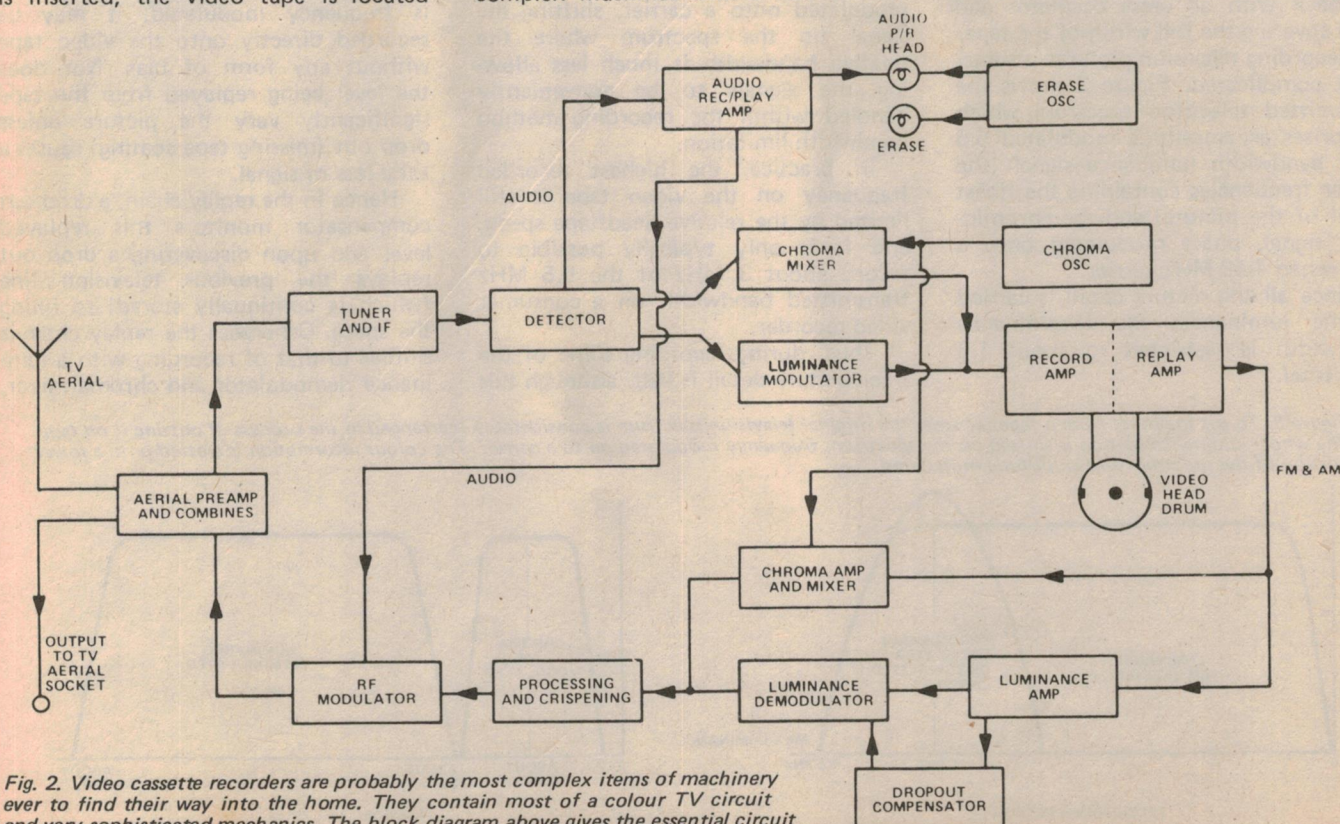


Fig. 2. Video cassette recorders are probably the most complex items of machinery ever to find their way into the home. They contain most of a colour TV circuit and very sophisticated mechanics. The block diagram above gives the essential circuit elements inside a VCR.

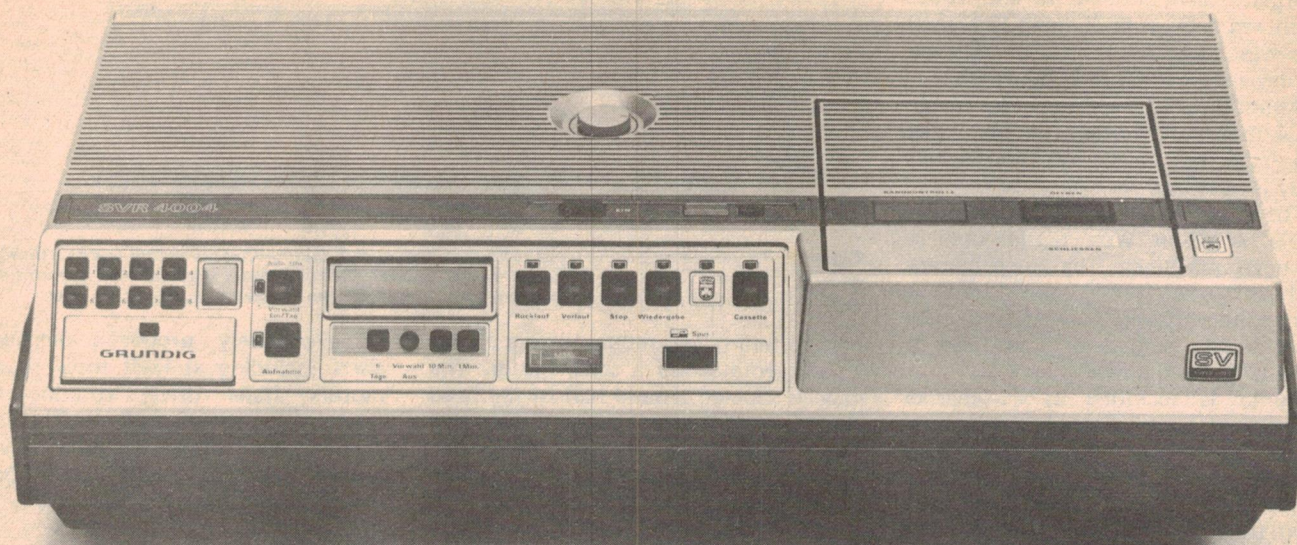

Grundig's SVR4004 will accept four-hour tapes and claims the most advanced timer. Although one of the costliest systems available its advantages make it quite attractive.

to connect between the antenna and the television set. Thus the recorder needs some form of aerial splitter, usually with a preamplifier, which feeds the TV set and the built-in TV tuner. The detector separates audio, luminance (brightness of the picture) and chrominance (colour) which are then processed and recorded separately on the video tape using different techniques.

Audio is recorded conventionally using a single head for recording and playback with an erase oscillator and head covering the full width of the tape.

Recording television pictures is somewhat complicated. Figure 3 shows the transmitted television spectrum which comprises an amplitude modulated 5.5 MHz bandwidth luminance signal (the higher frequencies containing the finest detail of the picture) and the chrominance signal, phase modulated onto a suppressed 4.43 MHz carrier.

Since all the picture detail is carried in the luminance, the chrominance bandwidth is restricted to about 1.5 MHz total.

Although these high frequencies can be directly recorded on to video tape if the relative tape/head speed is sufficiently high, there is a limitation. There is a theoretical limit to the bandwidth of a signal that may be directly recorded on magnetic tape. The wavelength of the higher frequencies and the physical gap distance in the recording head limit this to about nine octaves. To overcome this limitation the wide bandwidth video signal is frequency modulated onto a carrier, shifting the signal up the spectrum where the relative bandwidth is much less allowing the signals to be conveniently handled within the recording method bandwidth limitation.

In practice, the highest recorded frequency on the video tape is still limited by the relative head/tape speed, and it is only typically possible to record about 3 MHz of the 5.5 MHz transmitted bandwidth on a consumer video recorder.


Thus, during recording some of the finer picture detail is lost, although this

may be subjectively improved upon replay. The vital colour frequencies are located around 4.43 MHz, so a separate arrangement is made to record these. The chroma carrier is modulated with another carrier, the lower sideband of which falls somewhere around 700 kHz. This is then amplitude modulated and recorded directly on the video tape.

Thus the frequency limited colour signals are recorded below the luminance information. Since this luminance is frequency modulated, it may be recorded directly onto the video tape without any form of bias. Nor does the level being replayed from the tape significantly vary the picture unless drop out (missing tape coating) causes a total loss of signal.

Hence in the replay chain, a drop out compensator monitors this replayed level and upon discovering a drop out replays the previous television line (which is continually stored) so filling the space. Otherwise the replay chain is similar to that of recording with a luminance demodulator and chroma mixer,

Figure 3. To get the most from a tape recorder the original television spectrum is considerably rearranged in the process of putting it on tape. The whole luminance section is shifted up the spectrum, frequency modulated on to a carrier. The colour information is slotted onto a lower portion of the spectrum and amplitude modulated.

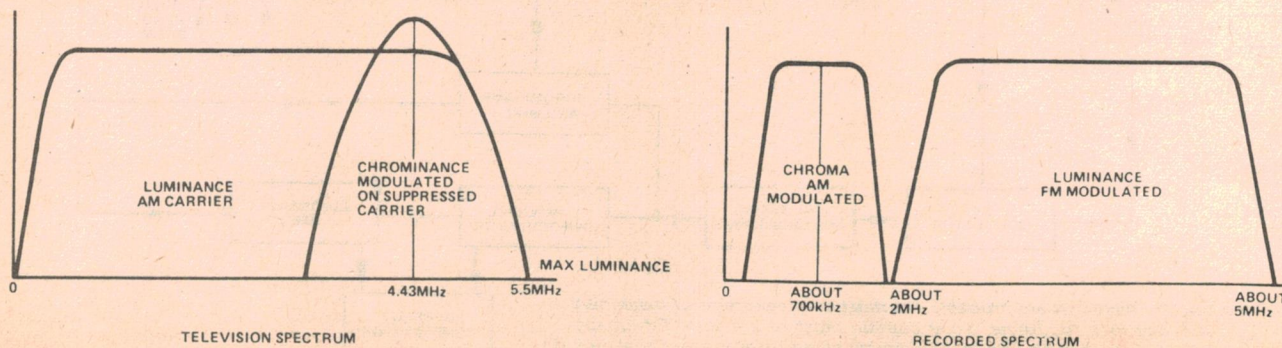

after which the signals are combined, electronically 'cleaned up' and 'crisp-ened' using high frequency boost to recreate some sharp edges or detail in the picture.



The replayed video and audio are then combined in the RF modulator which is essentially a microminature television transmitter. This is then combined with the incoming aerial signal and sent to the television receiver where it can be tuned on a spare pre-selector. There are also electronic servo circuits in video cassette recorders which ensure that the head drum spins at a precise speed which also controls the tape speed and physical location of the tape relative to the control track pulses. Speed accuracy is essential otherwise the picture will appear to shudder on the TV set and in the worse case, will break up and be lost altogether.

Formats

The VHS, VCR and SVR recording formats are basically similar in that they all record slanted video tracks on the tape having guard bands between them, plus the audio and control tracks with guard bands separating them from the video (As shown in figure 1.) Head motion and tape direction are different; the actual physical dimensions of the recorded tracks differ also, between these systems — dependant on the mechanical design of each system. The most widely used is the VHS format, which, on current models allows up to three hours of recording on one tape.

The Beta format (Betamax, Beta-cord — from Sanyo, Sony and Toshiba)

Sanyo's VTC 9300 'Betacord' is a Beta format machine, as the name implies. A remote 'pause' button allows you to 'drop' advertising segments from a recording — providing you are watching what you're recording.

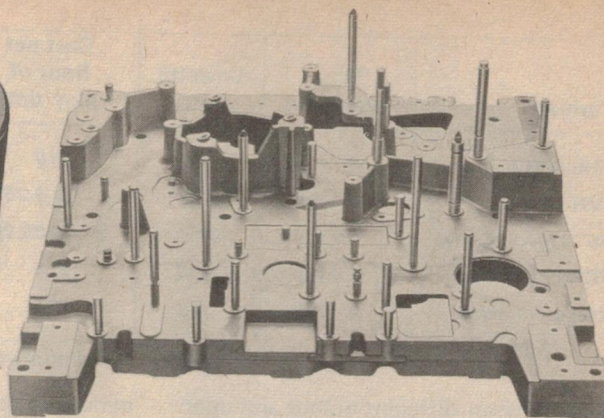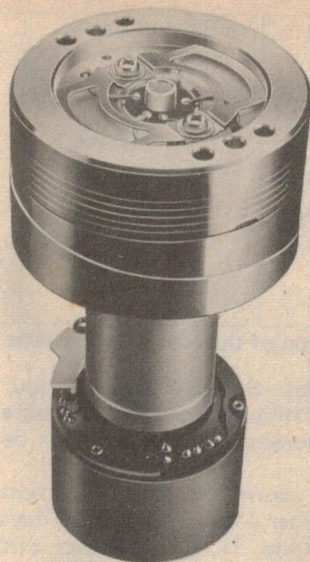

The mechanical precision and finesse necessary in video cassette recording machines is illustrated in the two pictures above. At left is a record/playback head, at right a tape guide and transport mechanism module.

is a system that eliminates the wasted tape of the guard bands between tracks as recorded on the other formats. This provides considerably improved recording times.

The guard band between tracks on the other formats is to prevent cross talk between the tracks and interference due to mistracking.

In the Beta system, adjacent recorded tracks actually touch. The two rotating heads of a Beta format machine are tilted slightly in opposite directions so that alternate recorded tracks have a different azimuth. While scanning one track, if a video head slightly overlaps an adjacent track the azimuth misalignment is sufficient to eliminate the cross talk. Adjacent tracks will thus act as guard bands to their neighbours.

It has been claimed that three hour recording times would not have been possible without this development.

This development paved the way for video heads having very small thickness and gaps around 0.6 microns. Consequently, a very narrow video track can be recorded onto the tape, and a much lower writing speed than other formats may be used. The general effect is a reduction in linear tape speed, reduced tape thickness, minimum tape length for a given recording time and a relatively small cassette.

Products

The various brands of video cassette recorders available come under the four different formats. Machines within a particular format have interchangeable video cassettes.

There are only five manufacturers who produce units which are then marketed by other companies, often with cosmetic changes. Although such multiple branding might not be particularly beneficial to the manufacturer's corporate image, it does mean that multiple organisations are promoting one particular product which does make for considerably improved impact in the all-important war to become the standard video cassette format.

Table 1 compares the four video cassette formats from Grundig, JVC, Philips and Sony. One point that should be made immediately is that the earlier Philips format, simply termed VCR and used until about a year ago, only provided one hour playing time.

Video cassettes to match all these formats are available from a variety of companies. For instance VHS cassettes can also be found under Thorn, TDK, Ampex and Fuji labels, VCR-LP from Agfa, BASF and 3M, while Betamax is available from 3M. Actual tape cost will



Format	Max. play time	Cassette cost.	Cost per hour of play time	Rewind speed; mins per hour of play time	Cassette size	Approx retail price of machine.
VHS (JVC)	3 hrs	\$30	\$10	1.3 mins/hr	188 x 25 x 104 mm	\$1200-\$1300
SVR (Grundig)	4 hrs	\$37	\$ 9.25	0.93 mins/hr	127 x 41 x 146 mm	\$1550-\$1650
BETAMAX (Sony)	3½ hrs	\$28-30	\$8.60-\$9.20	1.6 mins/hr	156 x 25 x 96 mm	\$1350-\$1450
VCR-LP (Philips)	2½ hrs	\$35	\$14	1.8 mins/hr	127 x 41 x 146 mm	\$1000-\$1100
VCR-LP (Philips)	3 hrs	\$39	\$13	—	127 x 41 x 146 mm	* 3hr Philips cassette to be released shortly.

TABLE 1: Comparison of the four video cassette formats.

vary between different brands and upon the discount found but the figures quoted in Table 1 should provide an approximation.

All the video cassette recorders indicated in Table 2 offer similar facilities. These include all normal tape transport controls, built-in TV tuner with eight-channel preselectors and electronic clock/timers with varying facilities. The timer found on the VHS is currently the most basic and only allows the recorder to be set to start up to 24 hours ahead in one minute steps — the video cassette runs until stopped automatically, at the end of the tape. The Philips and Sony machines can both be set three days ahead, Philips in one


minute steps, Sony in quarter hour steps. The Philips timer also provides a recording duration so the tape can be set to stop.

Grundig currently has the most advanced timer providing up to 10 days advance setting. However, expect this year to see up-market models becoming available with rather more complex timers. These will provide such facilities as permitting several different programmes, on varying channels, to be recorded during a 10 day period within the confines of a single cassette length. Such timers are essentially programmed microprocessors and should be considerably more versatile than existing recorders.

Apart from Sony and Grundig, still frame is not provided officially on consumer video cassette recorders, but can in some cases be found by careful manipulation of the pause control — on the other hand some VHS machines actually go into fast forward while slightly depressing 'pause'. Proper still frame and, in the case of JVC — double speed playing, will become available on the next generation of video cassette recorders.

Another facility that comes in particularly useful are connectors for video and audio. These enable recorders to be connected together for copying without the loss of quality resulting from connecting aerial leads due to

Philips' N1700 machine uses their own VCR system for which three-hour tapes will shortly be available.

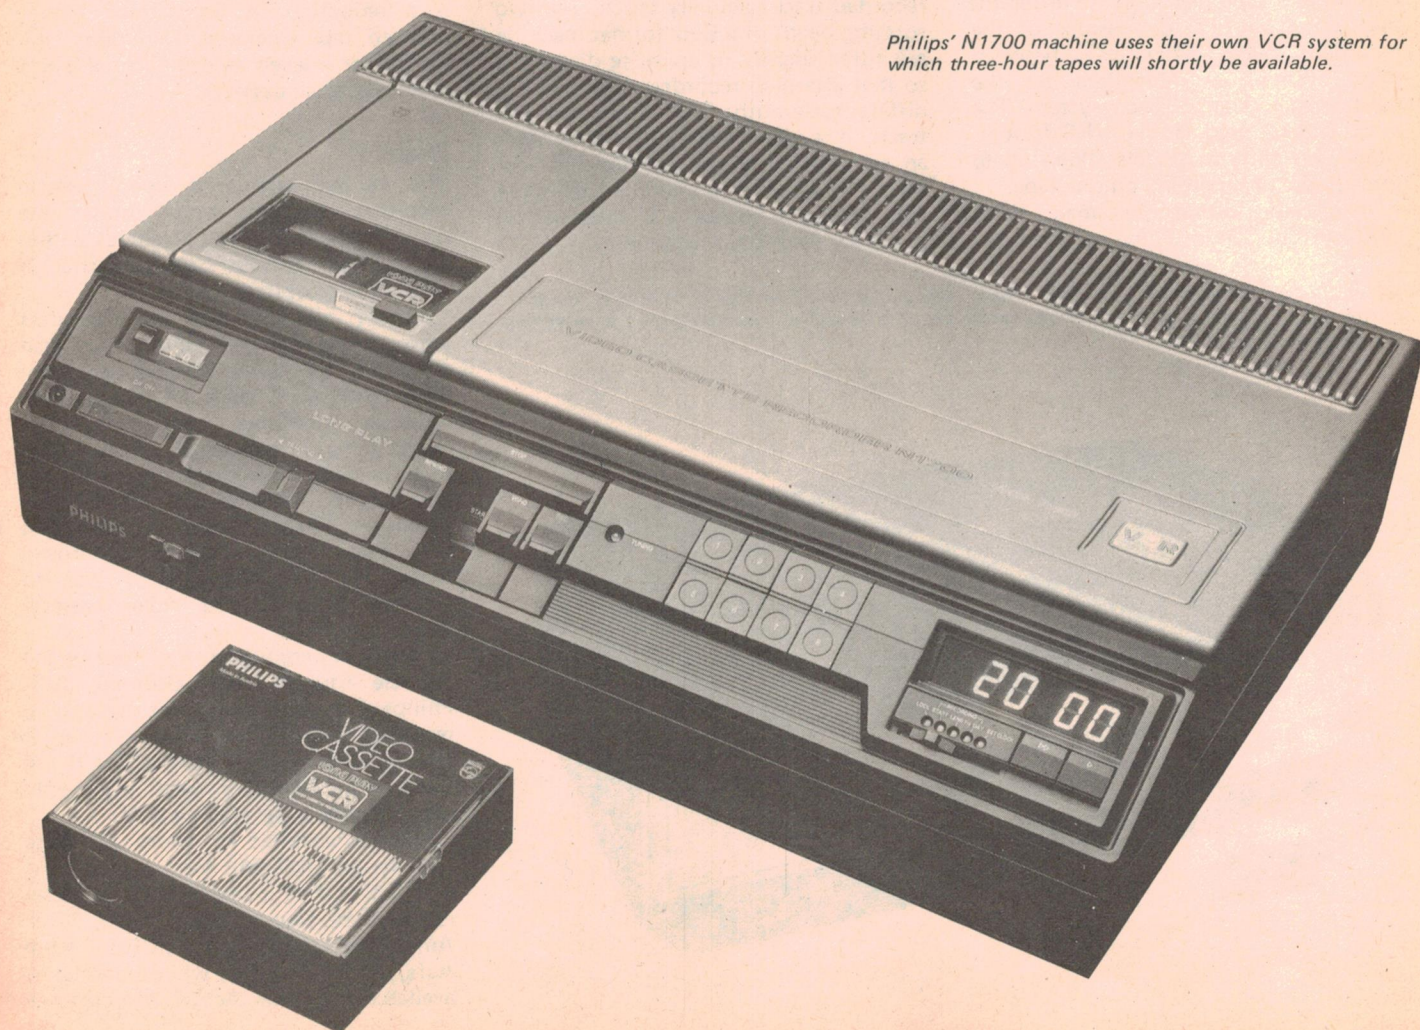

losses in the modulator and tuner combination. Unfortunately however, there is no standard for these connectors and each manufacturer has his own ideas. Video and audio connectors are provided as standard with JVC and Sony (and derivatives), but are extras on Philips and Grundig.

One other point that bears examination is the video-tape threading. As mentioned earlier, the removal of tape from the cassette is performed automatically by the recorder, but different machines use different principles. The Philips N1700 automatically threads when turned on, but in order to protect the tape which is threaded around the rotating heads, the unit turns itself off after about one minute. This can be rather frustrating if one is waiting to record a programme, but has the advantage of immediate operation when play or record are selected. On the other hand the JVC HR-3300 recorder only threads when the play control is selected which gives a three second delay before pictures are seen. On the other hand fast winding is considerably better since the tape does not have to negotiate a multitude of guides. The Grundig SVR4004 follows the Philips principle and, in addition, has unique remote control of all operating functions. The Sony Betamax also follows the Philips tradition.




Other systems

All the video cassette recorders mentioned so far have been designed to operate exclusively on the PAL colour system. If it is required to send video cassettes to other parts of the world or vice versa, another, older, format can be used called U-Matic which is available from Sony and National in multiformats. North America use the NTSC colour system, France, the Soviet bloc and much of the Middle East, SECAM, while PAL is used by civilised Europe. Provided a multistandard television receiver is used, video cassettes recorded in any of the areas can then be replayed

in other countries. For instance, when one retires (for either age or tax purposes) to the south of France or the Caribbean, one can arrange a supply of civilised programmes to be flown over. However, U-Matics are much more expensive than the earlier formats and use rather more expensive and bulky tape. On the other hand, quality is somewhat better and twin audio tracks are available for stereo. The U-Matic format is somewhat more versatile than the others in that programmes can be made using special portable and editing video cassette recorders. ●

TABLE 2

SVR	VHS	VCR-LP	Beta (max)
Grundig SVR4004	JVC HR-3300	Philips N1700	Sony SL8000UB
	Akai VS 9300		Toshiba V-5250
	Mitsubishi		Sanyo
	National Panasonic		

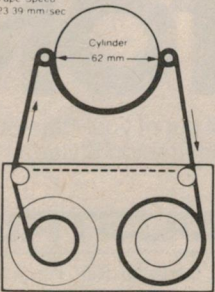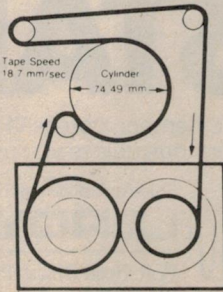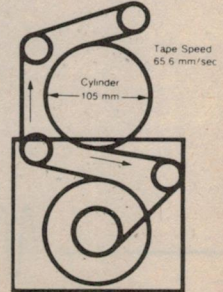System	VHS	BETA format	VCR
Adopted Manufacturers	<i>Akai, Hitachi, Victor Matsushita, etc.</i>	<i>Sanyo, Sony, Toshiba</i>	<i>Philips, Grundig</i>
Recording Time	180 min.	195 min.	150 min.
Tape Speed	23.39mm/sec.	18.73mm/sec.	65.6mm/sec
Relative Tape Speed	4.85m/sec.	5.83m/sec.	8.18m/sec.
Tape Width	12.65mm	12.65mm	12.65mm
Video Head Gap Azimuth	$\pm 6^\circ$	$\pm 7^\circ$	$\pm 15^\circ$
Tape Length (Max. Time)	257m	222m	708m
Tape Thickness	19 micron	14 micron	15 micron (150 min.)
Cassette Dimensions (in mm)	188 x 104 x 25	156 x 95 x 25	146 x 127 x 41
COMPARISON OF VIDEOCASSETTE PARAMETERS	<p>Tape Speed 23.39 mm/sec</p>  <p>Cylinder 62 mm</p>	<p>Tape Speed 18.7 mm/sec</p>  <p>Cylinder 74.49 mm</p>	<p>Tape Speed 65.6 mm/sec</p>  <p>Cylinder 105 mm</p>

PROFESSIONAL

**Ohio Disco Packager, SWB Electronics,
uses Stanton Exclusively.**



Larry L. Decker, Designer / Owner, examines finished control table for Disco use.

The trend to Portable Disco continues strong. An ambitious Company in Canton, Ohio, SWB, is achieving excellent success with their units (their goal is a national franchising operation). James C. Fravel, General Manager/Promotions, writes to Stanton, "We use Stanton cartridges in each and every unit we sell. Two of our units have been running for about a year and a half without failure. We are proud of the track record of our units and the Stanton cartridges."

They use the 500AL because it's a durable cartridge and "gives SWB a 4 dB base boost that we like to have with the music we play. It has been, by far, the best cartridge we have used (and we have tried many)".

So, Stanton, world famous for its top-of-the-line calibrated cartridges, the 881S and the 681 series, also serves the professionals in the Disco Industry.

Whether your usage involves recording, broadcasting, archives, disco or home entertainment, your choice should be the overwhelming choice of the professionals in every field . . . Stanton Cartridges.



STANTON!

And remember, you can't get the best out of your Stanton Cartridge unless you use a genuine Stanton Stylus.

Sole Australian Distributors



LEROYA INDUSTRIES PTY

W.A. Head Office: 156 Railway Pde., Leederville 6007. Phone 381 2930.

N.S.W. Office: 7 Jordan Rd., Wahroonga 2076. Phone 487 2543.

silicon valley '79

AUSTRALIA'S LEADING COMPONENT SUPPLIERS*

A great '4 Card Trick' from Silicon Valley in '79.

- 1 The most comprehensive range of active and passive components — all with immediate off-the-shelf availability.
- 2 An efficient, fast, reliable mail order service.
- 3 A nation-wide structure of resellers.
- 4 A regular up-dated price list.

1. OVER 7,000 ACTIVE & PASSIVE COMPONENTS — ALL WITH OFF-THE-SHELF AVAILABILITY

Silicon Valley can now supply all the major requirements for most electronic projects, hobbyist applications, one-off bench test experiments and the needs of industry requiring one-off products for design research and development.

3. RESELLERS ALL OVER AUSTRALIA

We are continually adding a number of preferred electronic dealers to our selected group of resellers.

silicon valley BRANCHES

NEW SOUTH WALES
Silicon Valley
23 Chandos St., St. Leonards
Tel: (02) 439 2965

VICTORIA
Silicon Valley
380 Bridge Rd., Richmond
Tel: (03) 429 4780

NEW ZEALAND
Silicon Valley
7-9 Kirk St., Grey Lynn,
Auckland. Tel: 76 1169

QUEENSLAND
Silicon Valley
22 Ross St., Newstead.
Tel: (07) 52 1339

SOUTH AUSTRALIA
Silicon Valley
170 Sturt St., Adelaide.
Tel: (08) 51 4080

NEW SOUTH WALES
Electronic Distributors
Shop 4, PO Arcade, Joyce Street, Pendle Hill.
Tel: (02) 636 6566

Pre-Pak Electronics
718 Parramatta Road, Croydon.
Tel: (02) 797 6144

Madjenk Lighting & Electronics
Shop 5, 246 Princes Highway, Dapto.
Tel: (042) 61 1785

Applied Technology P/L
109-111 Hunter Street, Hornsby.
Tel: (02) 476 4758

In-Electronics
84 Ramsay Street, Haberfield.
Tel: (02) 799 3331

Kit-Sets
657 Pittwater Road, Dee Why.
Tel: (02) 982 7500

Rendell Research
Ringwood Road,
Exeter (Moss Vale)

Serv-U Appliance Centre
107 George Street, Bathurst.
Tel: (063) 31 1356

Radcom
105 Eldridge Rd Bankstown
Tel: 02 709 4706

A.C.T.
Dalcom
29 Colbee Court, Philip
Tel: (062) 82 3581

QUEENSLAND
Kit Sets
293 St. Pauls Terrace, Fortitude Valley.
Tel: (07) 52 8391

RESELLERS

Hunts Electronics
P.O. Box 546, Toowoomba.
Tel: (076) 32 9677

Technitron
63 Grange Street, Bundaberg

Southport Electronics Shop
9 Young Street, Southport.
Tel: (075) 32 3632

VICTORIA:
Rod Irving Electronics
499 High Street, Northcote.
Tel: (03) 489 8131
Stewart Electronics
240b Huntingdale Road, Huntingdale.
Tel: (03) 543 3910

South West Electronics
119 Hopkins Street, Footscray
Tel: (03) 689 3819

SOUTH AUSTRALIA:
Northern Hi-Fi
Shop 41, Westland,
Whyallm Norrie
Tel: (086) 45 5766

Kitronics
Peel Street, Adelaide.
Tel: (08) 212 5505

WESTERN AUSTRALIA:
Atkins Carlyle
1-9 Milligan Street, Perth.
Tel: (09) 321 0101

B.P. Electronics
11 Duke Street, Albany.
Tel: (098) 41 2681

*(For further proof just turn to page 43 in this issue of E.T.I. for an eyeful of real bargains.)

2. FAST RELIABLE MAIL ORDER SERVICE

The mail order division of Silicon Valley is able to offer prime products, fully warranted, fully specified of current production and backed by comprehensive data including handbooks, specifications sheets and application notes.

For fast, efficient service just send your mail orders to:—

MAIL ORDER DEPARTMENT
P.O. BOX 898 CROWS NEST
N.S.W. 2065.

4. REGULAR UPDATED COMPONENT PRICE LISTS

Catalogues may be fun to flip through but how quickly they date — Today's prices are not yesterday's —

Silicon Valley "up-dated" price lists takes the unpleasant surprise out of your mail order or store purchase. You always know what your latest project will cost you. For your copy of the April 1979 price list — which includes a large number of new additions to our already extensive range of components — just complete the coupon below and return it to our Mail Order Division.

Return this coupon today, for your FREE April issue Silicon Valley price list:

Name

Address

..... P/Code

Post to Silicon Valley, P.O. Box 898, CROWS NEST,
N.S.W. 2065

State-of-the-art Transceiver

High technology invades CB products. American manufacturer, A.R.F. Products, have combined unique single sideband and AM circuitry with microprocessor technology in a top-flight transceiver. Report from Marvin Hobbs, consultant engineer, Chicago.

AMERICAN MANUFACTURER, ARF Products, has produced a CB transceiver that completely alters the face and direction of CB technology. In their Model 2001 every effort has been made to use the latest state-of-the-art electronics technology to the utmost. Twenty four ICs, equivalent to 7 500 transistors, are employed. Advanced communications theory and unique digital circuitry have been applied.

Two of these unique circuits are AM Silencing (abbreviated AMSIL) and Servo Amplitude Modulation (abbreviated SAM). Patents have been applied for these features and they are trademarked.

Microprocessor control

In addition to the above features, the Model 2001 offers the latest in microprocessor control of channel selection.

It provides for all of the scanning and frequency selection features possible with a National Semiconductor type 57150 controller. The major keyboard functions are as follows:

1. Memory Storage of up to 10 channels.
2. Recall and display of the memorized channels.
3. All-channel selection by pressing "enter" key and two numbered keys.
4. Fast or slow up-down scanning of all channels.
5. Immediate emergency channel selection.
6. Monitoring of the emergency channel every 10 to 15 seconds, if desired.

In addition to the keyboard scanning, two modes are provided by a Scan lever switch. These modes are 'Busy' and 'Open'. The Model 2001 will act as a search receiver to find an open (or clear)

channel or a busy one. For busy channels the frequency synthesizer is tuned from channel to channel until the receiver is unscelched. It then locks onto the busy channel as long as it is unscelched and for a short period of 3 to 6 seconds after the signal disappears. During this time the receiver is waiting for further communications before continuing its automatic search for busy channels. For open channels the frequency synthesizer is automatically tuned from channel to channel until the receiver is squelched. This condition indicates an open channel. At that point the operator can turn off the scan lever switch and proceed to communicate.

General specifications

The receiver employs dual gate MOSFETs in the RF amplifier and



Figure 1. The future arrives today! This state of the art CB transceiver from US firm A.R.F. Products features microprocessor control and sophisticated circuitry for top-quality performance under the stringent conditions encountered on 27 MHz.

mixer to provide good high level signal handling capability. It is a single-conversion superhet with an IF at 10.695 MHz. Separate 8-pole monolithic quartz crystal filters are used in both the AM and SSB modes.

Sensitivity at 10 dB (S plus N/N) is better than 0.25 μ V in the SSB mode and better than 0.35 μ V (50 percent) on AM.

Selectivity at 3 dB down for SSB is 200-3000 Hz (center frequency to lower band edge). For AM it is ± 2.2 kHz minimum and ± 2.7 kHz maximum. Adjacent channel rejection is greater than 65 dB (measured by EIA spec RS-382) and greater than 80 dB by common methods of measurement. Image rejection is better than 80 dB.

The AGC controls the audio output within 10 dB over an input signal range of 1 μ V to 10,000 μ V.

In the transmitter section the output stage is switched so that it operates Class C in the AM mode and linear AB in the SSB mode.

Power output is maintained at 12

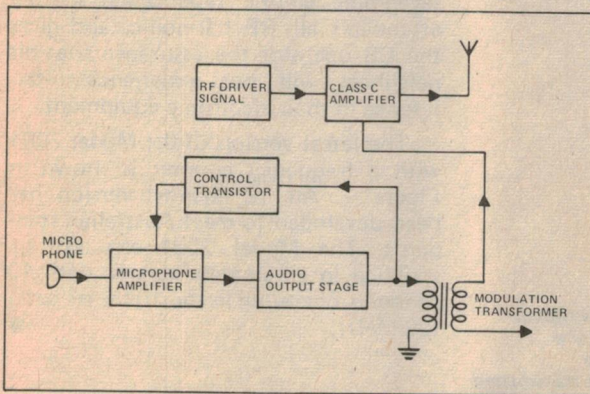


Figure 3. Simple speech compression circuit common in many transceivers. Transistor driven by audio output stage controls gain of mic amplifier in modulator.


watts PEP, through a microphone signal level change of 16 dB, in the SSB mode. Third order intermodulation distortion is greater than 25 dB down. Modulation frequency response at one-half rated PEP is plus minus 0.5 watt from 300 Hz to 2100 Hz. In the AM mode maximum unmodulated carrier power is 4.0 watts. At 100 percent modulation average AM power is 7.2 watts under servo amplitude control peak modulated power is 16 watts maximum.

Amplitude Modulation Silencing (AMSIL)

With the large amount of AM operation on most CB channels it would be highly desirable to use some form of selective calling. This type of operation is being considered seriously but is not yet available.

The ARF 2001 offers the next best thing. By using an AM silencing circuit, all incoming AM signals can be squelched when the transceiver is in the SSB mode. Thus, one does not hear all AM

Figure 2. Block diagram of the AMSIL operation. When activated, the squelch remains closed for AM signals but opens for SSB signals.

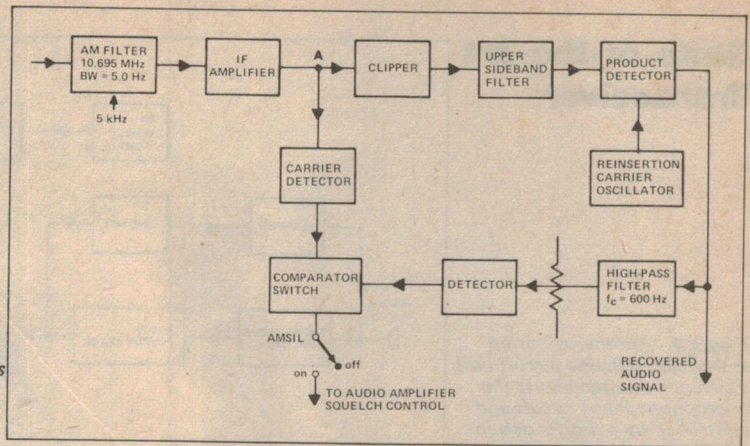

signals on a channel while waiting to hear from an SSB compatriot.

AMSIL relies on the fact that AM transmission has a carrier signal, while on SSB the carrier is suppressed.

In figure 2, a comparator switch controls the receiver squelch. The incoming signal takes two directions at point A. On one side the comparator is supplied with a negative voltage when AM signals

filter to the right of point A. Actually the SSB AGC circuit controls the AM IF gain to avoid clipping of an SSB signal. SSB signals produce a recovered audio signal of sufficient strength to activate the SSB AGC and control the AM IF gain and thus avoid clipping in the SSB IF. On the other hand, AM signals do not produce enough audio signal to activate the AGC sufficiently to reduce the AM IF gain appreciably and in that way actually enhance the waveform clipping of the AM signal. When both AM and SSB signals are present in the IF amplifier, AMSIL acts to suppress the AM interference. However, it cannot eliminate AM heterodyne beat notes which may be heard if AM signals are present when the SSB signal is being received.

Servo Amplitude Modulation (SAM)


Speech compression circuits are essential to all CB transceivers (except toy types) to meet FCC requirements relative to the control of modulation level. However, there is some difference in the results they achieve. All of them have the mission of preventing the amplitude modulation from exceeding 100 percent. What they do to the average modulation level is another matter!

One of the simplest speech compression circuits is the feedback type shown in Figure 3. Unfortunately, if its threshold is set to hold the modulation below 100 percent, average modulation is about 30 percent, there will be only about 0.1 watt in each sideband and the AM signal will have a total power of about 4.2 watts. However, there is little point in comparing SAM with simple feedback type compressors because they are not used in most current CB transceiver designs — at least not exclusively.

Practically all modern CB transceivers use some form of speech clipping. A typical basic circuit is shown in Figure 4. A clamping circuit controlled by feedback around the audio amplifier output stage regulates the audio signal

State-of-the-art Transceiver

Figure 4. Another common speech compression circuit uses a clamper shunted across the microphone input circuit and controlled by a limiter driven by the audio output stage.

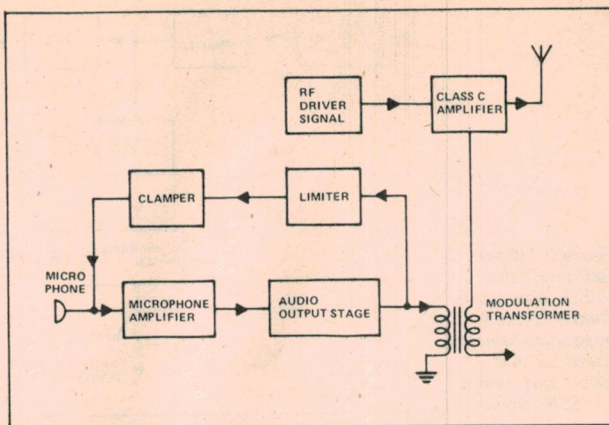

level. In some designs some of the transmitter's RF output is detected and fed back to act as a further control on the clamper in the SSB mode. These compressors hold positive (upward) modulation to about 70 percent and negative (downward) modulation to about 80 percent. SAM differs in that although it clips the signal as it comes

Figure 6 is a complete block diagram of all the elements of the servo amplitude modulator. Some have been mentioned above.

The use of a clipper or symmetrical limiter after the microphone naturally produces some distortion, but this is eliminated by the low pass filter following the limiter. This filter ensures that

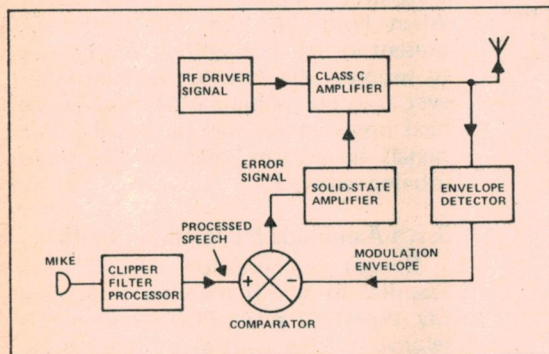


Figure 5. SAM consists of a clipper-filter processor monitored by a feedback loop detecting the modulation envelope of the transmitted signal.


from the microphone, it also has a feedback loop working off the transmitted AM signal.

As in Figure 5, this loop comes around from the transmitter's output through an envelope detector to a comparator. The modulation of the transmitted signal is compared to the processed speech signal and correction signals from the comparator control the solid-state modulator.

The main advantage of SAM is that it strives to keep the signal fully modulated at 100 percent regardless of the speech level, while other compressors are mainly concerned with keeping the modulation well below 100 percent to meet regulation requirements.

The tight servo control of SAM also keeps the modulation within the set limits. However, at the same time it results in sideband power from 50 to 100 percent greater than that resulting from typical speech compressors found in other CB transceivers.

Figure 6. SAM circuit maintains high level of modulation and eliminates both audio and RF distortion with multi-pole elliptic filters.

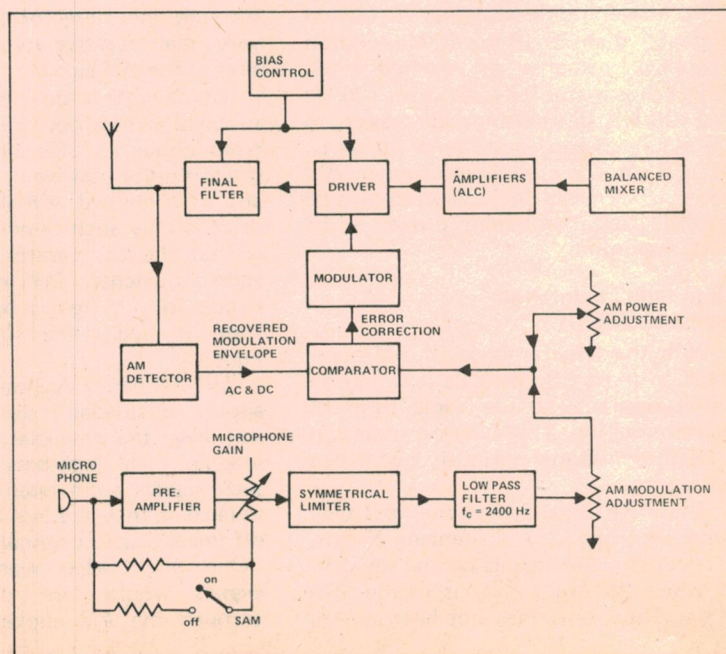

the AM signal's occupied bandwidth is within specification at all times.


When the comparator detects a difference in either the recovered modulation envelope or signals coming from the filter following the speech processor, or in the DC reference signals associated with them, a self correcting error voltage is generated and applied to the solid-state modulator. The amplitude modulator then ensures that the processed speech signal is faithfully imposed onto the carrier signal envelope. This feedback control system maintains the average unmodulated carrier power over the operating frequency range of the transmitter even though the output of the power amplifier may vary.

Also, the audio frequency response is a function of the characteristic of the speech processor filter and not of the frequency response of the modulator circuit. This contrasts with conventional modulators, where the modulation transformer has an appreciable effect on the audio response. The final filter is a seven-pole elliptic type which sharply attenuates all RF harmonics and gives the CB operator the assurance that his neighbors will not experience interference in their electronic equipment.

The latest version of the Model 2001 with a frequency counter is shown in Figure 1. An 18 channel version has been developed to meet Australian standards. The Model 2001 can also be supplied in an amateur version with 40 channels operating in the 10 meter band (28 MHz).



ONE STOP TECHNOLOGY SHOP

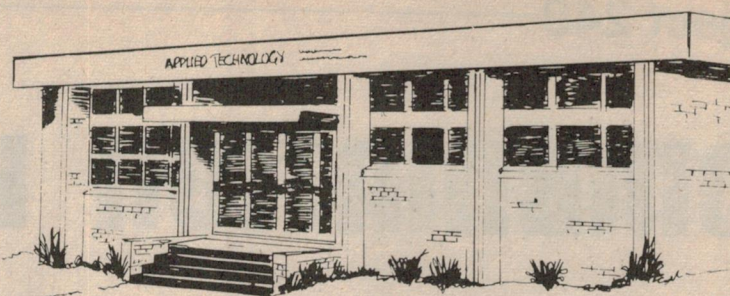

7400 TTL SERIES													
SN7400N	.25	SN7497N	2.75	74LS15	.35	74LS279	.85	CD4082	.50	SOLDER WIRE WRAP			
SN7401N	.25	SN74100	2.25	74LS21	.35	74LS290	1.45	CD4093	.99	8 PIN	.25 .65		
SN7402N	.25	SN74109N	1.00	74LS22	.35	74LS293	1.55	CD4098	2.49	14 PIN	.33 .75		
SN7403N	.25	SN74116N	1.80	74LS26	.40	74LS298	2.75	MC14409	14.95	16 PIN	.35 .80		
SN7404N	.35	SN74123N	.80	74LS27	.30	74LS367	.75	MC14410	14.95	18 PIN	.50 .90		
SN7405N	.35	SN74125N	.75	74LS28	.40	74LS368	.75	MC14411	14.95	20 PIN	.60 1.20		
SN7406N	.50	SN74126N	.75	74LS30	.30	74LS374	2.95	MC14419	4.95	22 PIN	.75 1.30		
SN7407N	.50	SN74132N	1.15	74LS32	.35	74LS375	1.25	MC14433	19.95	24 PIN	.80 1.90		
SN7408N	.35	SN74136N	1.15	74LS37	.45	74LS386	.95	MC14506	.75	28 PIN	.90 2.20		
SN7409N	.35	SN74145N	1.25	74LS38	.45	CMOS SERIES		MC14507	.99	40 PIN	1.00 2.40		
SN7410N	.25	SN74147N	3.00	74LS40	.45			MC14562	14.50	MC14583	3.50		
SN7411N	.35	SN74150N	1.75	74LS42	.70	CD4000	.20	CD4508	3.95	MICRO PROCESSOR PARTS			
SN7412N	.35	SN74151N	1.10	74LS47	.70	CD4001	.20	CD4510	1.35				
SN7413N	.55	SN74152N	1.10	74LS51	.45	CD4002	.23	CD4511	1.35	2650	CPU \$21.00		
SN7414N	.85	SN74153N	1.10	74LS54	.45	CD4006	1.50	CD4515	2.95	2608	PIPBUG ROM 19.75		
SN7416N	.60	SN74154N	1.70	74LS55	.50	CD4007	.35	CD4518	1.50	6800	CPU 11.00		
SN7417N	.60	SN74155N	1.75	74LS73	.65	CD4009	1.10	CD4520	1.45	SCMP II	CPU 12.75		
SN7420N	.25	SN74156N	1.75	74LS74	.45	CD4010	1.10	CD4566	2.25	4116	Dynamic RAM 17.50		
SN7421N	.45	SN74157N	1.10	74LS75	.65	CD4011	.20	LINEAR SERIES		2114	4K STATIC 7.95		
SN7422N	.40	SN74160N	1.65	74LS76	.70	CD4012	.35			LM301CN or H	.35	2102	1K STATIC 1.75
SN7423N	.35	SN74161N	1.65	74LS78	.80	CD4013	.55	LM307CN or H	.65	2708	EPROM 15.00		
SN7425N	.35	SN74162N	1.95	74LS83	1.25	CD4015	1.20	LM308CB or H	1.35	1602	UART 7.95		
SN7426N	.40	SN74163N	1.95	74LS85	1.25	CD4016	.55	LM309K	1.50	280	CPU 29.50		
SN7427N	.40	SN74164N	1.95	74LS86	.45	CD4017	1.20	LM311H or N	.85	280	CTC 17.50		
SN7430N	.25	SN74165N	1.95	74LS90	.75	CD4018	1.40	LM317K	2.90	280	PIC 17.50		
SN7432N	.35	SN74166N	1.95	74LS93	.95	CD4019	.65	LM320T-5	1.50	OPTO			
SN7433N	.45	SN74167N	4.00	74LS95	1.40	CD4020	1.50	LM320T-12	1.50				
SN7437N	.45	SN74173N	2.75	74LS96	1.60	CD4021	1.45	LM323K-5	8.25	FMD500	CC 1.25		
SN7438N	.45	SN74174N	1.95	74LS107	.70	CD4022	1.60	LM324N	1.35	FMD507	CA 1.25		
SN7439N	.45	SN74175N	1.75	74LS109	.70	CD4023	.30	LM339N	.90	FMD357	CA 1.15		
SN7440N	.35	SN74179N	2.10	74LS111	.70	CD4024	.95	LM340K-5	2.40	FMD350	CC 1.15		
SN7441N	1.30	SN74180N	2.10	74LS112	.70	CD4026	2.10	LM340K-12	2.40	RED LEDS	.20		
SN7442N	.70	SN74181N	3.50	74LS113	.70	CD4027	.75	LM340K-15	2.40	YELLOW LEDS	.35		
SN7443N	1.20	SN74182N	1.75	74LS123	1.50	CD4028	1.10	LM340T-5	.90	GREEN LEDS	.35		
SN7444N	1.50	SN74190N	1.75	74LS125	.75	CD4029	1.45	LM340T-6	.90	DIODES			
SN7445N	1.50	SN74191N	2.60	74LS132	.75	CD4030	.65	LM340T-8	.90				
SN7446N	1.40	SN74192N	2.25	74LS136	.75	CD4035	1.50	LM340T-12	.90	IM4148	.07		
SN7447N	.95	SN74193N	2.25	74LS138	.95	CD4040	1.25	LM340T-15	.90	IM4001	.05		
SN7448N	.95	SN74194N	2.30	74LS139	.95	CD4041	1.25	LM340T-18	.90	IM4004	.08		
SN7450N	.35	SN74195N	2.30	74LS151	1.10	CD4042	1.25	LM340T-24	.90	MDA3501	35ABRIDGE 3.75		
SN7451N	.35	SN74196N	2.75	74LS153	1.10	CD4043	1.35	LM380N	1.20	MDA3504	35A BRIDGE 4.50		
SN7453N	.35	SN74200N	1.00	74LS155	1.10	CD4044	1.35	LM381N	1.50	TRANSISTORS			
SN7454N	.35	SN74279N	1.00	74LS157	1.10	CD4046	1.75	NE555V	.35				
SN7456N	.35	SN74365N	1.00	74LS158	1.90	CD4047	2.50	LM556/5566N	.90	BC547, 8, 9	.15		
SN7460N	.35	SN74366N	1.00	74LS160	1.90	CD4048	1.35	NE565N or H	1.95	BC557, 8, 9	.15		
SN7470N	.60	SN74367N	1.00	74LS161	1.90	CD4049	.60	NE566CN	2.50	BD139	.55		
SN7472N	.45	SN74368N	1.00	74LS162	1.90	CD4050	.60	NE567V or H	2.65	BD140	.55		
SN7473N	.60	74LS00 SERIES		74LS193	1.90	CD4051	1.20	NE571N	11.95	2143055	.85		
SN7474N	.60			74LS164	1.30	CD4053	1.20	LM709N or H	.75	MJ2955	.95		
SN7475N	.65	74LS00	.30	74LS170	3.50	CD4056	2.95	LM723N or H	.55	C10641	.65		
SN7476N	.45	74LS01	.30	74LS174	1.00	CD4059	9.95	LM741CN	.35	*PRICES INCLUDE SALES TAX			
SN7480N	1.00	74LS02	.30	74LS175	.90	CD4060	2.50						
SN7485N	1.30	74LS03	.30	74LS181	3.95	CD4066	1.00						
SN7486N	.50	74LS04	.30	74LS190	2.10	CD4068	.40						
SN7489N	1.90	74LS05	.35	74LS191	1.20	CD4069	.35						
SN7491N	.50	74LS08	.30	74LS192	1.20	CD4070	.40						
SN7491N	1.00	74LS09	.30	74LS193	1.20	CD4071	.35						
SN7492N	.55	74LS10	.30	74LS194	1.35	CD4072	.45						
SM7493N	.50	74LS11	.30	74LS195	1.35	CD4076	1.85						
SN7494N	1.10	74LS13	.60	74LS197	1.85	CD4081	.40						
SN7495N	1.10	74LS14	1.20	74LS253	1.85								
SN7496N	1.25			74LS257	1.65								
				74LS258	1.85								



MAIL ORDER BOX 355, HORNSBY.


PLEASE ADD \$2.00 TOWARDS POST & PACKING.



1A PATTISON AVE., WAITARA. PHONE: (02) 487-2711 (3 lines)

COMBINATION LOCK

Mechanical combination locks abound — as do ideas for electronic ones. Unfortunately, electronic designs we've seen are either too simple (and of limited use) or too complex — and beyond the average hobbyist. Here's something that's in between these two extremes.

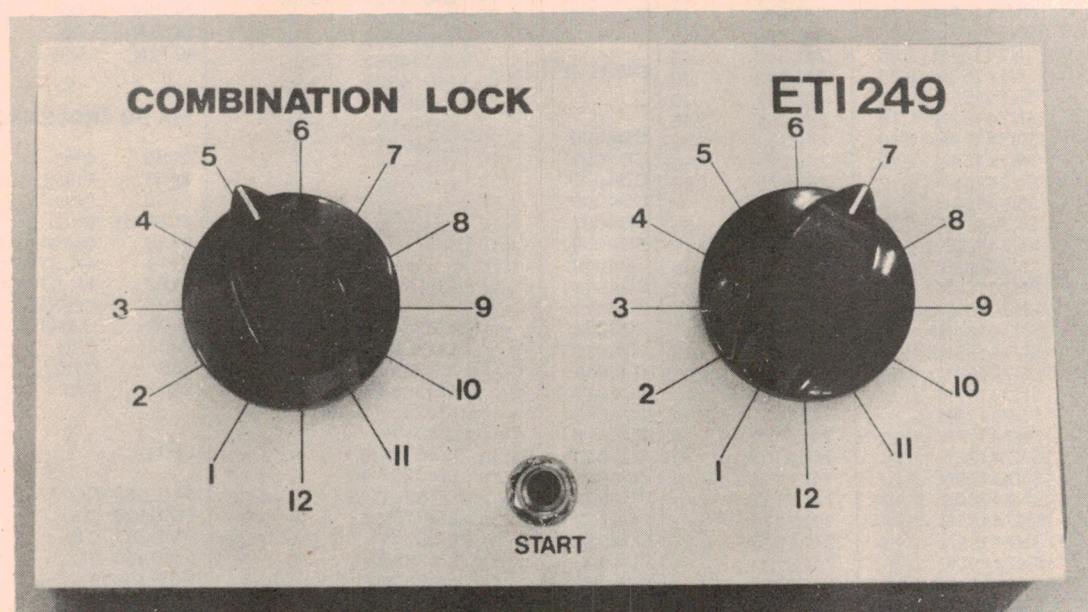

DIGGING THROUGH THE files produced a wealth of ideas for locks — most of them impractical for the constraints imposed on the project application. Tossing ideas around the office threw up some fascinating techniques . . . But we had to get a simple project together.

The simplest method is to connect several rotary switches in series to apply power to a solenoid-operated door lock when you dial up the right switch position on each. This has the advantage of extreme simplicity and a reasonable number of possible combinations. Problem is, if you leave that combination set on the switches then security is compromised because somebody, less trustworthy than your good self, may just take notice. Tch, tch.

What was needed was some technique that was self-cancelling or did not reveal the combination once it was 'dialed up'.

It occurred to us that the rotary numerical combination locks, such as on safes (you know — spin the dial, 13 left,

37 right, 21 left), did not reveal the complete combination once the lock was opened.

Having digested that little principle, the next thing was to work out how to do it electronically — and in a simple way.

The rotary numerical combination locks operate by successively unlatching a mechanical 'circuit'. When the last combination is dialed the bolt is released. How to do this electronically?


Latching Circuits

A number of 'latches' connected in series and operated in sequence such that power is applied to a solenoid lock when the last latch is selected will be an electronic equivalent to the mechanical combination lock. Next problem — the electronic latch. This can be made up in a number of ways. Relays can be connected to latch on when energised. But they're relatively expensive. Digital logic gates can also be connected to make a latch.

When a silicon controlled rectifier (SCR) has a voltage applied to the gate it will conduct and remain 'on' until the anode-cathode voltage falls to zero. That's a latching operation. SCR's are cheap and readily available and will handle the current required to operate a solenoid lock and for these reasons were chosen for the latches in this project.

To dial a sequence of numbers, providing the required combination, we first considered a multi-bank, multi-position switch. That turned out to be mechanically awkward and expensive. Suitable switches are also difficult for the average hobbyist to obtain. Two, 12-position, single-pole rotary switches were eventually chosen. They are an 'off-the-shelf' item obtainable from many component outlets.

Dialling three pairs of numbers in sequence on the switches simulates the operation of a rotary numerical combination lock — almost. This provides over 1.7 million combinations!

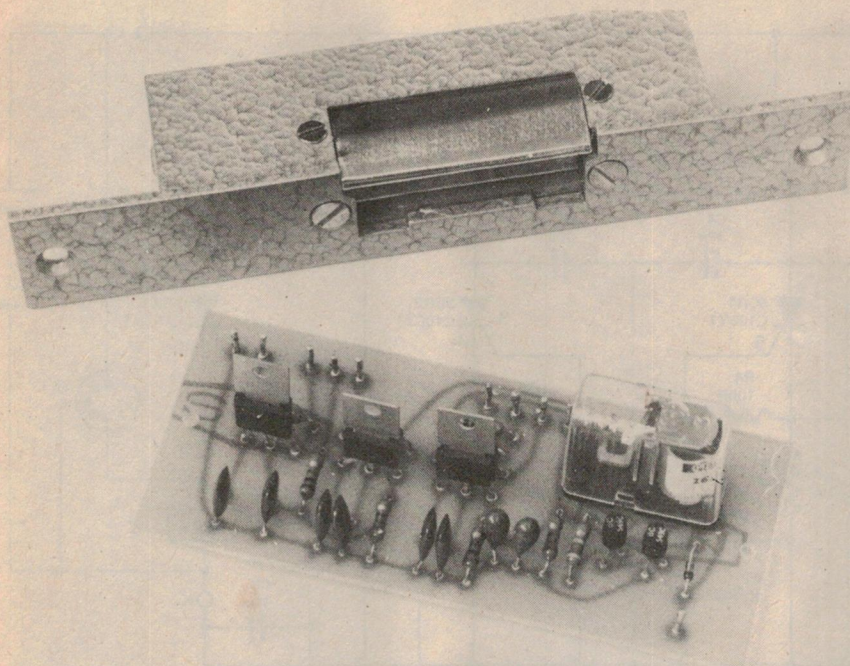

The printed circuit board and solenoid striker plate we used. Naturally any type of solenoid lock can be protected using this system.

Resetting

That solves the combination problem and the latch problem, but how do you reset the SCRs once you've operated the lock? Simple — turn off the power source. A switch could be used to momentarily disconnect the supply, 'unlatching' the SCRs, resetting the solenoid lock to await its next use.

What if you forget to push the button? Tch, tch, tch . . .

It seems a peculiarity of human nature that it is easy to memorise a sequence of numbers but very difficult to remember to reset a button or lock.

A simple timer operating a relay can do the job for you. Accordingly, the project has a timer incorporated.

The project is designed to operate from a battery. No current is drawn until the START button is operated. Current will only be drawn from the supply for the 25 seconds duration of the timer.

Mains operation, from a small transformer and rectifier is possible but a battery standby circuit should be included in case of mains power failure.

Solenoid Locks

There are two basic types: solenoid operated striker plates (i.e.: that are fixed in the door jamb) and solenoid operated bolts (attach to the door itself). We recommend you use a solenoid operated striker plate. Firstly, as they are fixed in the door jamb it is an easy matter to conceal all wiring. Secondly they may be used with existing dead-

latching mortise locks. Solenoid operated bolt locks are made to fix on the door itself and require a flexible lead run across the door at the hinged side.

Solenoid operated striker plates or bolt locks are available from specialist locksmiths. We obtained a number of samples from: *North Shore Locksmiths, 75 Willoughby Rd, CROWS NEST, 2065 Ph: (02) 437-6263.*

We used a solenoid striker plate manufactured by Golmar (model CV14). As the project operates from a 12 volt supply, a 12 volt version was used.

This striker plate suits common key-in-knob locks such as those made by Schlage, Weiser, Lockwood and Lanes.

Another type we looked at, manufactured by D.K. Security, model DKS 500, suits deadlatching mortise locks such as the Astra 300 and Lockwood 570 series.

For new installations the key barrel of a lock may be dispensed with. In existing locks, the key mechanism may be disabled if you wish.

Construction

The relay and all minor components are mounted on a printed circuit board. For convenience, and to avoid wiring errors, this method of construction is recommended.

Commence by putting all the resistors and capacitors on the board. Take note of the orientation of the tantalum capacitors. Next mount the transistors, diodes and SCRs — take note of lead orientation, carefully follow the component overlay diagram. Mount the relay last.

All external connections are made via pc pins inserted in the appropriate holes on the board. To avoid wiring errors, follow a sequence of wiring the connection from each pin, step by step.


Wiring a 'code' on the switches is a fairly simple process. Using the table below, allocate switch position pairs for SW1 and SW2 for each code in the three-step sequence necessary to open the lock.

For example, the code sequence of switch position pairs as shown in the diagram is 4-1, 1-11, 8-4. These are respectively shown connected to pc pins A-A', B-B', C-C'.

TABLE 1

SW1 pos no	pc pin	SW2 pos no	pc pin
1	B	1	A'
2		2	
3		3	
4	A	4	C'
5		5	
6		6	
7		7	
8	C	8	
9		9	
10		10	
11		11	B'
12		12	

This shows how the connection of wires A to C and A' to C' determine the combination of the lock. The above table shows the connection pattern for the combination 4-1, 1-11, 8-4 which can be seen by looking at the switch contact numbers corresponding to A, A', B, B', C and C'.

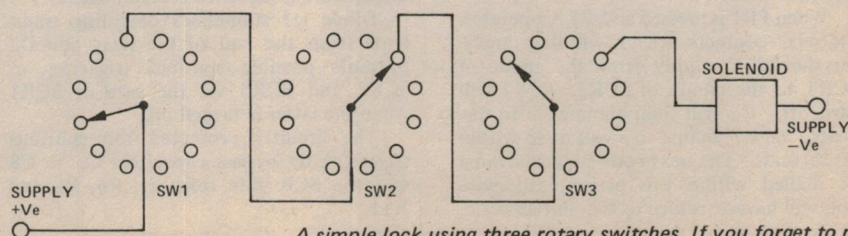

A simple lock using three rotary switches. If you forget to move them off the combination after opening the lock, you'll reveal it.

Project 249

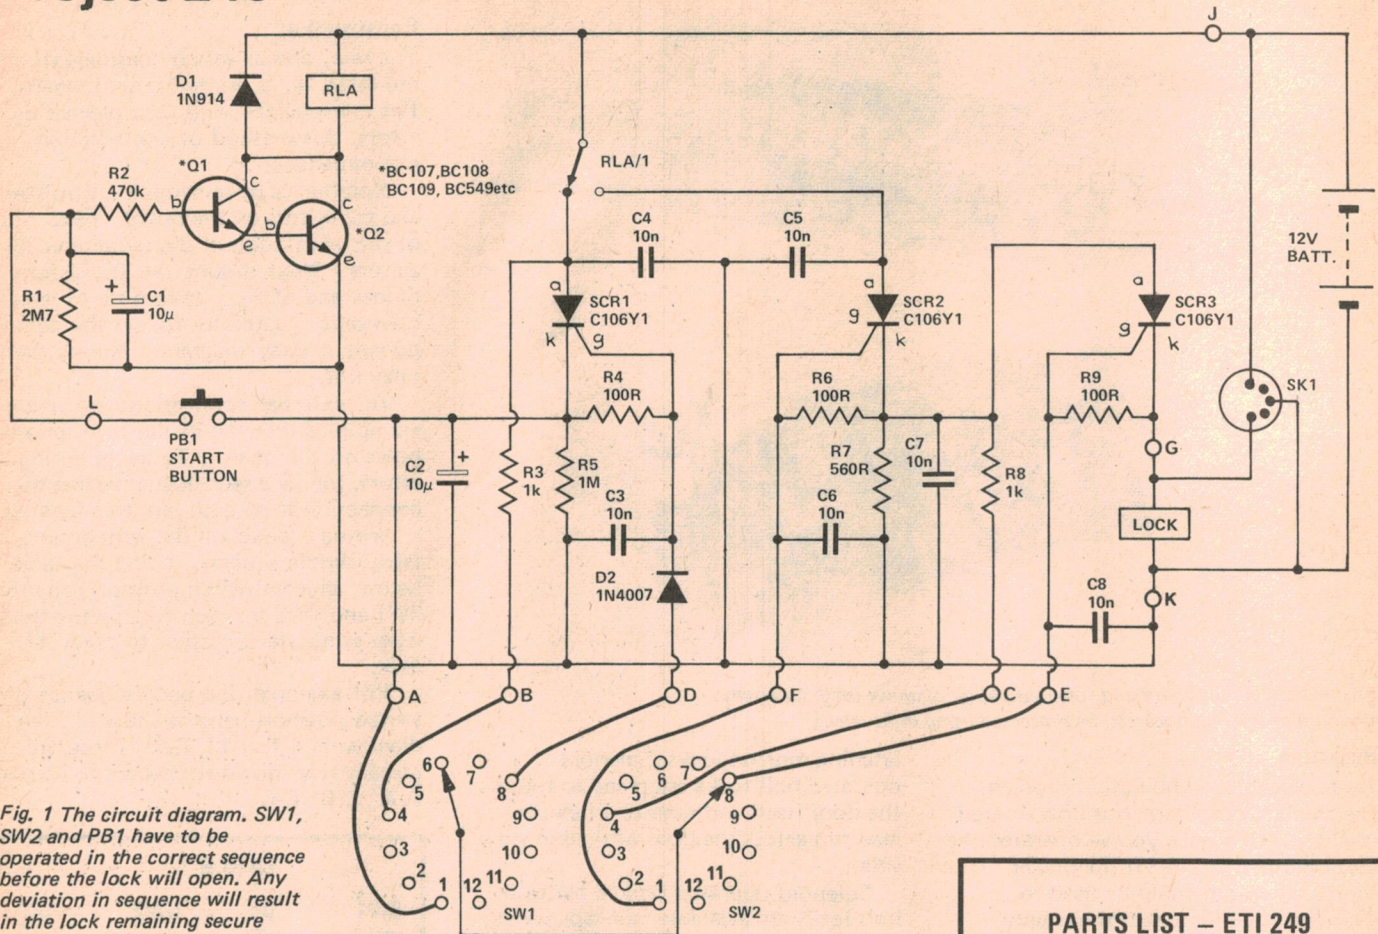


Fig. 1 The circuit diagram. SW1, SW2 and PB1 have to be operated in the correct sequence before the lock will open. Any deviation in sequence will result in the lock remaining secure

HOW IT WORKS - ETI 249

An 'initial' code is dialled on SW-1 and SW-2, 4 and 1 in this case. The gate of SCR1 will be forward biased via R5, SW-1, SW-2 and D2. SCR1 turns on, charging C2 to 12 volts.

The push-button PB1 is then pressed. This applies 12 volts from the cathode of SCR1 to the junction of R1/R2. Capacitor C1 will quickly charge to 12 V, Q1 and Q2 will turn on, operating the relay RLA. The circuit involving Q1, Q2, R1, R2, C1 and the relay is a 25-second timer. The relay will drop out after about 25 seconds as C1 will slowly discharge via R1, R2 and the input impedance of Q1, Q2, which is very high. The rest of the sequence must be completed within 25 seconds to operate the lock for when RLA drops out, the circuit is 'reset'.

When PB1 is pressed and RLA operates, the relay contacts, RLA1, will then transfer the 12 V supply from the anode of SCR1 to the anode of SCR2. SCR1 will turn off. C2 will then commence to discharge via R7, falling to a volt or so within 10 seconds. The next code sequence must be dialled within this period, otherwise you will have to return to the 'initial' code.

The second code is then dialled on SW-1 and SW-2, in this case 1 and 11. The gate of SCR2 will then be forward biased via SW-1 and SW-2, the current it draws will discharge C2. SCR2 will then turn on, applying 12 V to the anode of SCR3.

The third code is then dialled on SW-1 and SW-2, in this case 8 and 4. The gate of SCR3 will then be forward biased via R10, turning SCR3 on, energising the solenoid lock. At the end of the 25-second delay, the relay will drop out, resetting the circuit.

An external connection socket, SK1 is provided to enable power to be supplied to the lock should the circuit fail or the batteries run flat.

No current is drawn by the circuit until the operating sequence is commenced.

Diode D1 suppresses operating transients from the coil of the relay and D2 prevents possible spurious triggering of SCR2 and SCR3 via the gate of SCR1 when the latter is turned on.

The circuit is protected from spurious triggering by bypass capacitors C3 to C8 and the SCR gate resistors, R6, R8 and R11.

PARTS LIST - ETI 249

Resistors all ¼ W 5%

R12M7
R2470k
R31k
R4100R
R51M
R6100R
R7560R
R81k
R9100R

Capacitors

C1,210u 25V tantalum
C3-810n greencap

Semiconductors

SCR1-3C106Y1 or C106D1
Q1,2BC107, BC108, BC109 or BC549 or equivalent
D11N914
D21N4007

Miscellaneous

SW1,21 pole 12 way rotary
PB1miniature push to make
RLA1Pye type 265/12/C2 78/45 single-pole change-over 12V 180 ohm coil, 240V/5A contacts. (Dick Smith type S-7125 or similar).
SK1DIN 5-pin or similar
Solenoid-operated lock (see text), 12V battery. pcb: ETI 249, diecast case.

Combination Lock


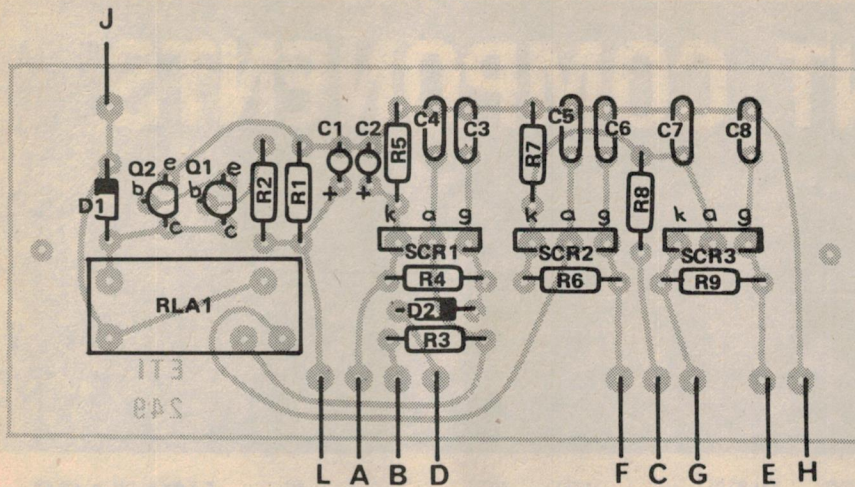


Fig. 2 The component overlay. See Table 1 and the circuit diagram for an explanation of the lettered AC pins.

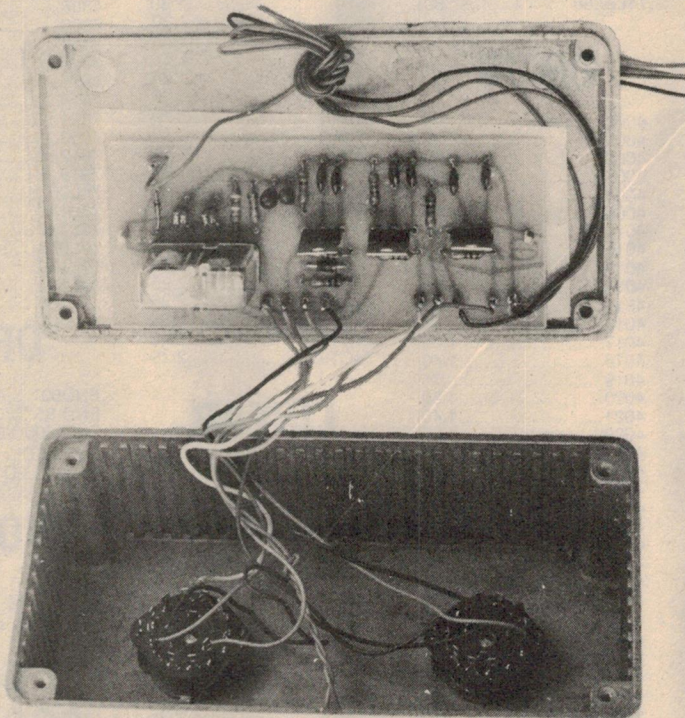

Interior of the lock. A diecast box provides a rugged and safe housing.

permanent 'location' point for knob grub screws. Better still, use collet knobs.


The external power/connection socket should be placed in a concealed location, known and accessible only to yourself, or those entrusted with the combination.

Installation instructions for the solenoid locks are supplied with the units.

Operation

1. Dial the 'initial' code. As illustrated in the circuit, turn SW1 to 4 and SW2 to 1.
2. Press the push button, PB1.
3. Dial the second code. As illustrated, turn SW1 to 1 and SW2 to 11. You have less than 10 seconds to do this.
4. Dial the third code. Turn SW1 to 8 and SW2 to 4, as illustrated.
5. The solenoid lock will release.
6. Twenty-five seconds after operating PB1, the circuit will reset and the lock will return to its latched condition.

PCB artwork shown full size.

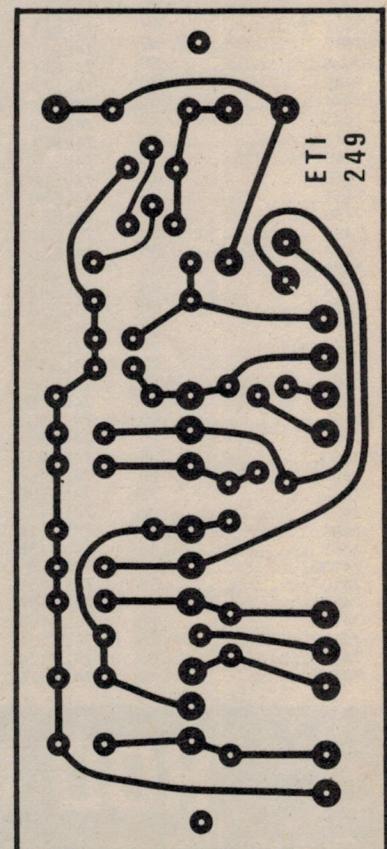

Installation

As this will very much depend on individual circumstances, we can only give you general guidelines.

Firstly, there must be no externally exposed, or visible, wiring. The switches

should be mounted such that their shafts protrude from the surface behind which the circuitry is mounted, without the shaft securing nuts being accessible. File a flat on the shafts so that you have a

DISCOUNT COMPONENTS

10 RED LEDS.....	\$1.50
7805.....	90c
7812.....	90c
LM317K.....	\$2.90
TIL209.....	18c
10 BC547.....	\$1.20
IN4003.....	7c
IN4002.....	7c
100 RED LEDS.....	\$13.00
10 4016.....	\$4.50
6 LUG TAG STRIPS.....	5c
309K.....	\$1.50

2114 (450n Sec).....	\$7.50
10 GREEN LEDS.....	\$2.90
10 YELLOW LEDS.....	\$2.90
10 4011.....	\$2.00
10 74LS00.....	\$2.00
10 uA301.....	\$3.30
4N28.....	\$1.00
4N29.....	\$1.10
10 7490.....	\$3.00
10 74123.....	\$5.00
10 741.....	\$2.90
LED CLIPS.....	2c
10 723.....	\$4.50

BD 139 — 50c ea.
 BD 140 — 50c ea.
 BC 547/8/9 — 15c ea.
 10 555 Timers for \$2.80
 MJ2955 — 90c ea.
 2N3055 — 85c ea.
 BC 557/8/9 — 20c ea.
 10 741's for \$2.80.

CANNON CONNECTORS

XLP-3-11.....	\$2.30
XLP-3-12c.....	\$3.25
XLP-3-31.....	\$3.25
XLP-3-32.....	\$3.00
XLR-LNE-11c.....	\$3.05
XLR-LNE-32.....	\$4.30

Weller cordless soldering iron kit model WC100DKW — includes batteries, solder, 4 interchangeable tips, battery charger and instructions for only \$29.50.

TTL

7400.....	20
7401.....	25
7402.....	28
7403.....	28
7404.....	37
7405.....	37
7406.....	50
7407.....	50
7408.....	34
7409.....	34
7410.....	20
7411.....	37
7413.....	54
7414.....	90
7416.....	60
7417.....	60
7420.....	30
7422.....	30
7426.....	45
7427.....	45
7430.....	30
7432.....	43
7437.....	50
7438.....	50
7440.....	30
7441.....	1.50
7442.....	70
7447.....	60
7448.....	60
7450.....	35
7451.....	35
7453.....	35
7454.....	30
7460.....	35
7470.....	65
7472.....	45
7473.....	60
7474.....	65
7475.....	65
7476.....	45
7480.....	1.25
7483.....	1.25
7485.....	1.45
7486.....	65
7490.....	35
7491.....	1.00
7492.....	75
7493.....	35
7494.....	1.10
7495.....	95
74100.....	2.45
74107.....	65
74121.....	60
74123.....	60
74132.....	1.25
74150.....	1.80
74151.....	1.10

74153.....	1.10
74154.....	1.70
74157.....	1.10
74160.....	1.55
74164.....	1.55
74165.....	1.55
74173.....	2.75
74175.....	1.65
74180.....	1.35
74192.....	1.40
74193.....	1.40
74221.....	1.50
74367.....	1.40

74LS

74LS00.....	30
74LS01.....	30
74LS02.....	30
74LS03.....	30
74LS04.....	35
74LS05.....	35
74LS08.....	30
74LS09.....	30
74LS10.....	30
74LS11.....	30
74LS12.....	30
74LS14.....	1.20
74LS20.....	30
74LS21.....	30
74LS27.....	30
74LS28.....	40
74LS30.....	30
74LS32.....	33
74LS37.....	45
74LS38.....	45
74LS40.....	30
74LS42.....	1.20
74LS73.....	1.20
74LS74.....	50
74LS75.....	70
74LS78.....	50
74LS85.....	1.50
74LS86.....	50
74LS90.....	1.20
74LS92.....	1.20
74LS93.....	1.20
74LS95.....	1.50
74LS109.....	50
74LS113.....	55
74LS114.....	55
74LS138.....	1.20
74LS151.....	1.20
74LS154.....	1.60
74LS157.....	90
74LS163.....	1.20
74LS164.....	1.30
74LS174.....	1.00
74LS175.....	1.00

74LS191.....	1.20
74LS192.....	1.20
74LS193.....	1.20
74LS194.....	1.20
74LS195.....	1.20
74LS196.....	1.20
74LS221.....	1.20
74LS253.....	1.85
74LS279.....	65
74LS365.....	80
74LS367.....	80
74LS368.....	80

CMOS

4000.....	40
4001.....	25
4002.....	25
4006.....	1.40
4007.....	25
4008.....	1.25
4011.....	25
4012.....	25
4013.....	55
4014.....	1.35
4015.....	1.20
4016.....	50
4017.....	1.40
4018.....	1.40
4019.....	75
4020.....	1.60
4021.....	1.40
4022.....	1.60
4023.....	25
4024.....	90
4025.....	40
4027.....	80
4028.....	1.25
4029.....	1.90
4030.....	40
4040.....	1.30
4041.....	1.25
4042.....	1.25
4043.....	1.50
4044.....	1.50
4046.....	1.95
4049.....	60
4050.....	60
4051.....	1.20
4052.....	1.20
4053.....	1.20
4060.....	2.65
4066.....	1.00
4068.....	40
4069.....	35
4070.....	40
4071.....	40

4072.....	40
4073.....	40
4074.....	40
4076.....	1.85
4077.....	40
4078.....	40
4081.....	40
4082.....	40
4510.....	1.30
4511.....	1.30
4518.....	1.30
4520.....	1.30
4528.....	1.20
4555.....	1.20
14553.....	7.50
14584.....	1.25
74C00.....	40
74C02.....	40
74C04.....	40
74C08.....	40
74C10.....	40
74C14.....	1.90
74C48.....	2.55
74C73.....	1.20
74C75.....	1.20
74C76.....	1.35
74C90.....	2.25
74C93.....	2.25
74C175.....	1.85
74C192.....	2.25
74C193.....	2.25

LINEAR

301.....	35
307.....	65
308.....	1.35
311.....	85
324.....	1.35
339.....	90
349.....	2.25
356.....	1.65
380.....	1.20
381.....	2.00
382.....	2.00
386.....	1.95
555.....	35
556.....	85
565.....	1.95
566.....	2.50
567.....	2.65
709.....	75
723(VR).....	55
741.....	35
747.....	1.25
3900.....	90
3909.....	1.25
CA3130.....	1.95

VOLTAGE REGS.

309.....	1.50
317.....	2.90
323.....	8.25
325.....	2.60
723.....	55
7805.....	90
7806.....	1.30
7808.....	1.30
7812.....	90
7815.....	1.30
7818.....	1.30
7824.....	1.30
7905.....	1.50
7912.....	1.50
7915.....	1.50
78L05.....	50
78L12.....	50
78L15.....	50
79L05.....	85
79L12.....	85
79L15.....	85

OPTO

FND507 C/A.....	1.70
FND 357C/C.....	1.40
FND 500C/C.....	1.40
Red LED.....	22
Green LED.....	35
Yellow LED.....	35

DIODES

IN4148.....	6c — 5c/100
IN4004.....	9c
IN5625 5A 400V.....	45c

I.C. SOCKETS

8 PIN DIL.....	25
14 PIN DIL.....	33
16 PIN DIL.....	35
18 PIN DIL.....	55
24 PIN DIL.....	70
28 PIN DIL.....	1.20
40 PIN DIL.....	1.40

ROD IRVING ELECTRONICS

Shop 499, High Street, Northcote. Vic. 3070. Ph (03) 489-8131. Open Mon-Thurs 8 am — 5.30 pm, Fri 8am — 8pm. Sat 8.30am-12.30pm Mail Orders: PO Box 135, Northcote. Vic.3070. Minimum 75c post and pack. Send 30c stamp for free condensed catalogue.

DEVELOPMENT TIMER

The Watkins Factor method of development is little known and at present almost unused — is this due to the lack of a proper timer? Phil Cohen has designed one.


IN 1893, a photographer called Alfred Watkins noticed that the time taken for an image to appear during the development of a photographic plate was a fixed fraction of the total development time.

The Watkins Factor

The phenomenon that Watkins noticed was that the total development time was a fixed number (called the Watkins Factor) times the period taken for the plate to be seen to darken initially. Now, whereas development time varies with temperature, concentration and 'age' of the developer, the Watkins Factor does not. If you develop a film for a *fixed* period, you *must* keep these three factors constant. If, however, you develop it using the Watkins Factor you can (within reasonable limits) *forget* the age, concentration and temperature.

This is all very well, but you would have to be able to see the film as it develops. This is not feasible with modern high-speed panchromatic film, which has to be developed in complete darkness. For this reason the Watkins Factor has been all but forgotten, hardly rating a mention in modern textbooks.

This print was developed in fresh, normally diluted developer. The print darkened after 15 seconds and total development time was 45 seconds. The Watkins Factor was thus 3.

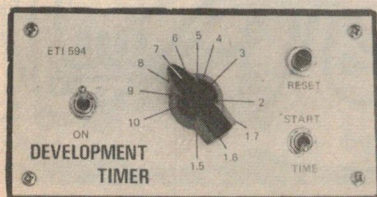

Theory


In the process of developing a print, developer slowly diffuses into the paper, reacting as soon as it reaches the photosensitized areas. The reaction is *diffusion controlled*. The reason why nothing appears for the first few seconds of development (called the 'induction period') is that the developer is still working its way into the paper.

With film you can't watch it develop, with paper you can so the Watkins method of development timing should be extremely useful to the amateur who can't afford a constant-temperature bath for his developer.

The Timer

It works like this: you set the appropriate Watkins Factor (which is specific to a particular developer and paper) on the front panel control. When you put the paper into the developer, you push the switch to 'START'. As soon as the first image starts to appear, you flick it back to 'TIME'. At the end of the development period the buzzer will sound. Then pull the paper out of the dish, wash it and fix it... viola!, beautiful prints.

With the developer diluted to half its strength this print was developed for 45 seconds. Clearly, it is underdeveloped.

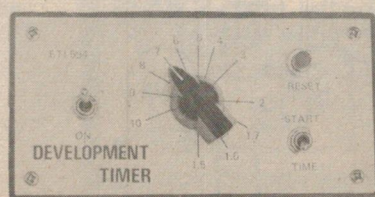

It may take a bit of experiment to find the correct Watkins Factor. Once you have it, though, you need not bother too much about developer temperature and (within limits) its age and concentration.

Building It


Construction should begin with the pc board. Make sure all of the capacitors, diodes, transistors and ICs are inserted the right way round. RV2 and RV3 are 'upright' preset pots bent over to fit flat against the pc board.

Mount C4 directly onto SW1, this keeps the batteries in place. The buzzer mounts on the end of the case with its leads passed through a hole. Note that the red lead goes to the '+' buzzer connection on the board.

Make sure that you use the correct tags of RV1. Refer to the wiring diagram. It is a log characteristic pot. A linear one will not have the same calibration scale.

Readers who would like a front panel reproduction, please write to: Project 594, Electronics Today Int, 15 Boundary St, Rushcutters Bay, 2011 NSW.

This print was developed in the diluted developer using the timer set for a Watkins Factor of 3. The result is very little different to the first print indicating that the Watkins Factor method is useful for 'old' developer.

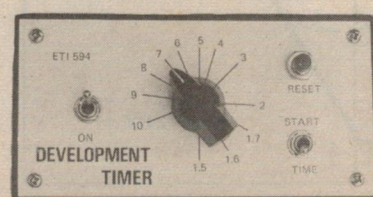

Project 594


Setting Up

After finishing the unit, disconnect the 'TIME' and 'START' wires from SW2. Solder them together and put the most sensitive current meter you have between this joint and 0V (most medium-priced multimeters will do). Disconnect the wire which goes to the middle contact of SW2 and connect it to the + end of C4. Set RV1 to '2'. Switch on and adjust RV2 for a zero meter reading.


What you have just done is to ensure that when the resistance of RV1 is at the '2' value, the current through Q1 is the same as that through Q2 (see 'How It Works'). This is to correct for differences between the two FETs which seldom have the same characteristic.

Now adjust RV3. Turn it fully clockwise and then slowly rotate it until the buzzer sounds (if it doesn't — there's something wrong). After this happens, turn it back about one-eighth turn. The timer is now fully set up.

Re-connect the unit as shown in the

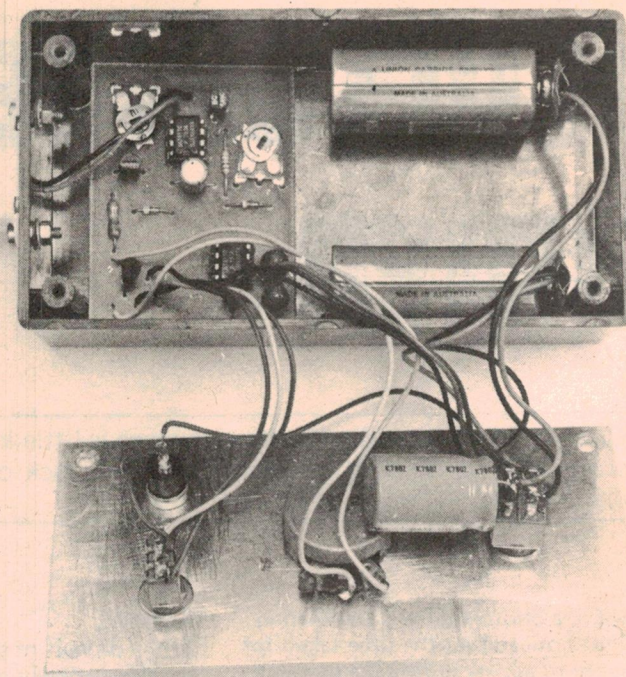

An interior view of the Timer. Note how the batteries are arranged. C4 can be seen mounted on the switch. This keeps the batteries in place when the box is closed.

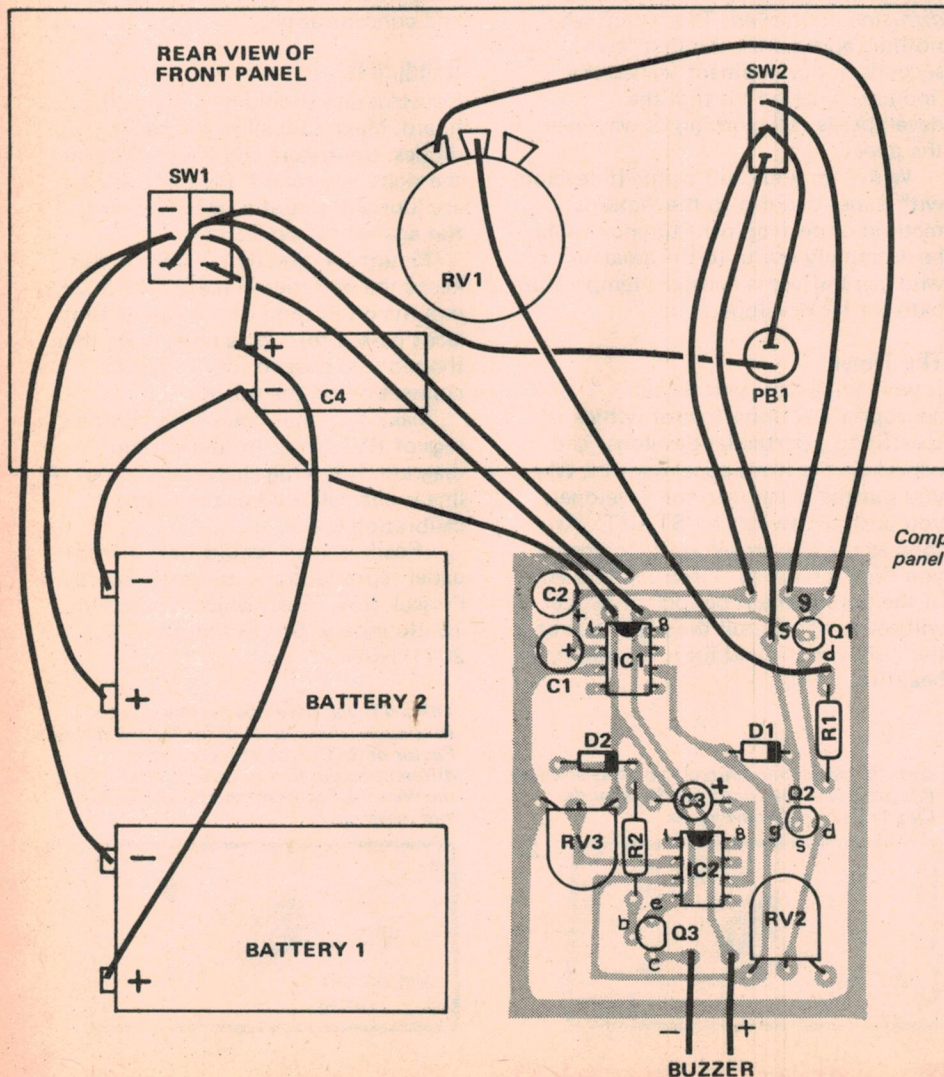


diagrams. Switch on and set SW2 to 'TIME'. Short out C1 temporarily to remove the charge put on it during the setting-up. With RV1 set to 2, switch SW2 to 'START' for five seconds and then push it back to 'TIME'. Five seconds later, the buzzer should sound.

Summary

The theory behind the use of this unit needs development. It should make a fascinating study for any photographer, amateur or professional. This device will make an interesting addition to any darkroom.

Component overlay, including the front panel switch and potentiometer arrangements

PCB artwork shown full size.

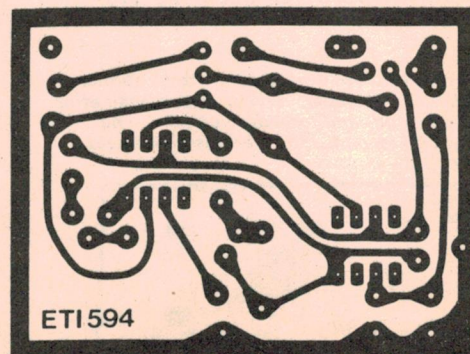

HOW IT WORKS - ETI 594

The Watkins Factor is the ratio of two time periods. A timing circuit having one variable period, which you set, and one fixed period is arranged to indicate when the correct ratio of time periods has been reached.

This is achieved by charging and then discharging a capacitor. The time taken to charge the capacitor is varied while the discharge time is fixed. The control used to vary the charging time is calibrated in terms of the Watkins Factor.

When a capacitor is charged at a constant current, the voltage across it will rise linearly with time – or 'ramp' upwards. Similarly, when it is discharged at a constant current, the voltage across it will 'ramp' downwards. This technique allows good accuracy to be obtained in timing applications.

In this circuit, the current at which the timing capacitance is charged is varied by means of a potentiometer control.

Q1 is connected as a 'constant current' source; that is, it will only allow a constant current to pass, the amount being determined by R1 and RV1. The potentiometer RV1 sets the Watkins Factor.

When SW2 is set to START, C1/C2 will charge via Q1/R1/RV1, the voltage across it ramping upwards at a linear rate. The lower the resistance of RV1, the higher the charging current causing C1/C2 to charge at a faster rate. The converse is also true.

Q2 is connected as a 'constant current' sink – when SW2 is set to TIME, C1/C2 will discharge via Q2/RV2, these components 'sinking' the current. The discharge current will be constant and the voltage across C1/C2 will ramp down at a linear rate.

A Watkins Factor of '2' requires equal charge/discharge times for C1/C2. So that the currents through Q1 and Q2 will be equal when RV1 is set for a Watkins Factor of 2, RV2 (a trimpot) is provided to set the current through Q2. This is used to calibrate the timer.

When the timer is switched on initially, with SW2 in the TIME position, any positive voltage on C1/C2 will cause the output of IC1 to go negative, drawing current through Q2/RV2, discharging the capacitors. Any negative voltage that may appear on C1/C2 will cause the output of IC1 to go positive. This will forward-bias D1 and 'pull up' the voltage across the capacitors. The combined action of these processes ensures that the voltage across C1/C2 stabilises at zero volts.

When the timing period is commenced at the start of developing a print, SW2 is set to START. As C1/C2 charge, the output of IC1 will go negative. When the image first appears on the paper, SW2 is set to TIME. C1/C2 will then discharge, as previously explained, and the voltage across the capacitors will go to zero. At this time, the buzzer will sound.

IC2 is arranged as a 'trigger'. When C1/C2 first begin to charge, the output of IC1 goes negative. When this negative voltage passes the value of the negative voltage applied to the inverting input of IC2, set by RV3, the output of IC2 will go very rapidly to about -7 V. At the end of the timing period, the output of IC1 goes to zero volts. As this drives the non-inverting input of IC2, the output will swing rapidly from about -7 V to +7V.

This will force a pulse of current through C3/R2, forward-biasing the base of Q3. When Q3 turns on the buzzer will sound.

C3 will take about one second to charge, Q3 will not receive sufficient base current and the buzzer will cease its cacophony. It sounds not unlike the wheeze from expiring bagpipes! This project was designed by a homesick scotsman.

D2 discharges C3 when the output of IC2 goes low when next you turn SW2 to START.

A pushbutton, PB1, allows you to abort a timing sequence by shorting C1/C2.

Note that the buzzer will sound whenever the unit is turned on. IC2 will trigger as the output of IC1 will initially be zero and the output of IC2 will thus jump to about +7 V, setting off the buzzer.

PARTS LIST - ETI 594

Resistors

R1 27k
R2 12k

Potentiometers

RV1 1M log
RV2 1M trim
RV3 250k trim

Capacitors


C1, 2 33 μ 10V tantalum
C3 10 μ 25V electrolytic
C4 470 μ 25V electrolytic

Semiconductors

IC1, 2 741
Q1, 2 2N5484
Q3 BC549
D1, 2 1N914

Miscellaneous

pcb ETI 594
SW1 miniature dpdt toggle
SW2 miniature spdt toggle
2 off 9V batteries with clips; case to suit;
9V dc buzzer and mounting bolts; knob with pointer.

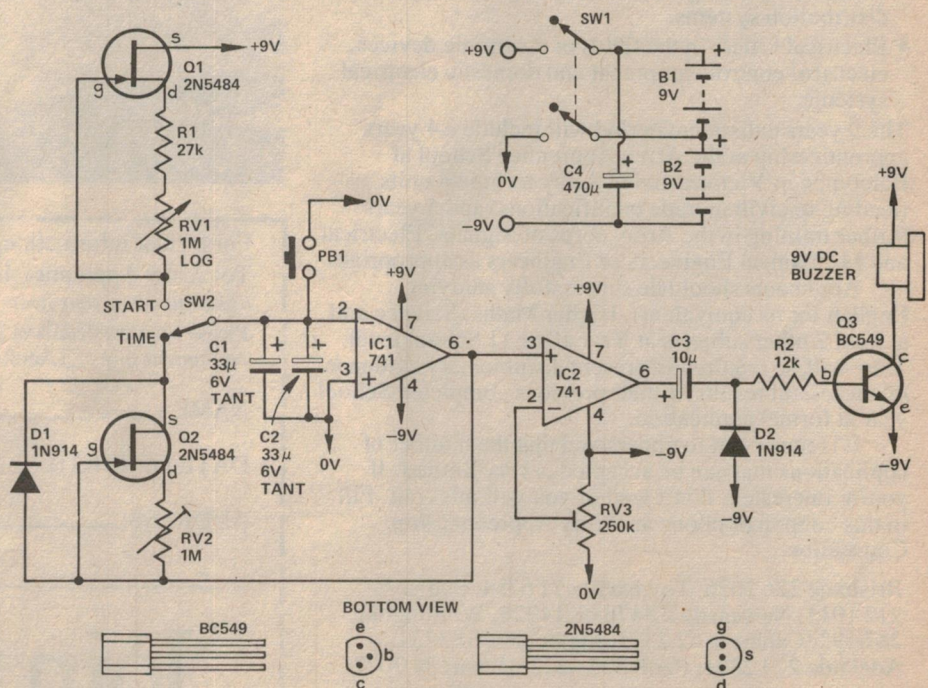

The circuit diagram. C1 and C2 are in parallel to achieve the required total capacitance and voltage rating.



Army Apprenticeships

Opportunities for young men (15-17*) in the Electronics and Electrical Trades.

ELECTRONIC TRADESMEN • ELECTRICAL MECHANICS • ELECTRICAL FITTERS

The Army wants young men to enlist as Army Apprentices to be trained as

- Electronic Tradesmen in the field of electronic communications.
- Electrical Mechanics in the field of high and low voltage electrical generation, reticulation and distribution systems.
- Electrical Fitters in the fields of electronic devices, electrical control equipment and domestic electrical systems.

The 9 years enlistment period will include a 4 years apprenticeship at the Army Apprentice School at Balcombe in Victoria and in Army technical units (leading to civilian trade qualifications) and 5 years further training in the Army corps of Signals, Electrical and Mechanical Engineers or Engineers as appropriate.


Applicants should be successfully studying English (or its equivalent), Higher Maths, Science and at least 2 other subjects at Year 10 or 11 School level. They will be required to present documentary evidence of successful results of their previous completed School year at formal application.

It is important to understand that the number of applications that can be accepted is very limited. If you're interested, don't wait or you will miss out. Fill in this coupon or phone an Army Apprenticeship Counsellor.

Brisbane 226 2626; Townsville 71 6784; Sydney 212 1011; Newcastle 2 5476 or 2 4728; Wollongong 28 6492; Canberra 82 2333; Melbourne 61 3731; Adelaide 223 2891; Perth 325 6222; Hobart 34 7077.

**Applicants must be at least 15 years old but still under 17 years old on January 1, 1980. If you are over 17 years you may apply to join the Army Adult Tradesman Scheme as an Electronic Tradesman trainee.*

Authorised by the Director General of Recruiting, Dept. of Defence.

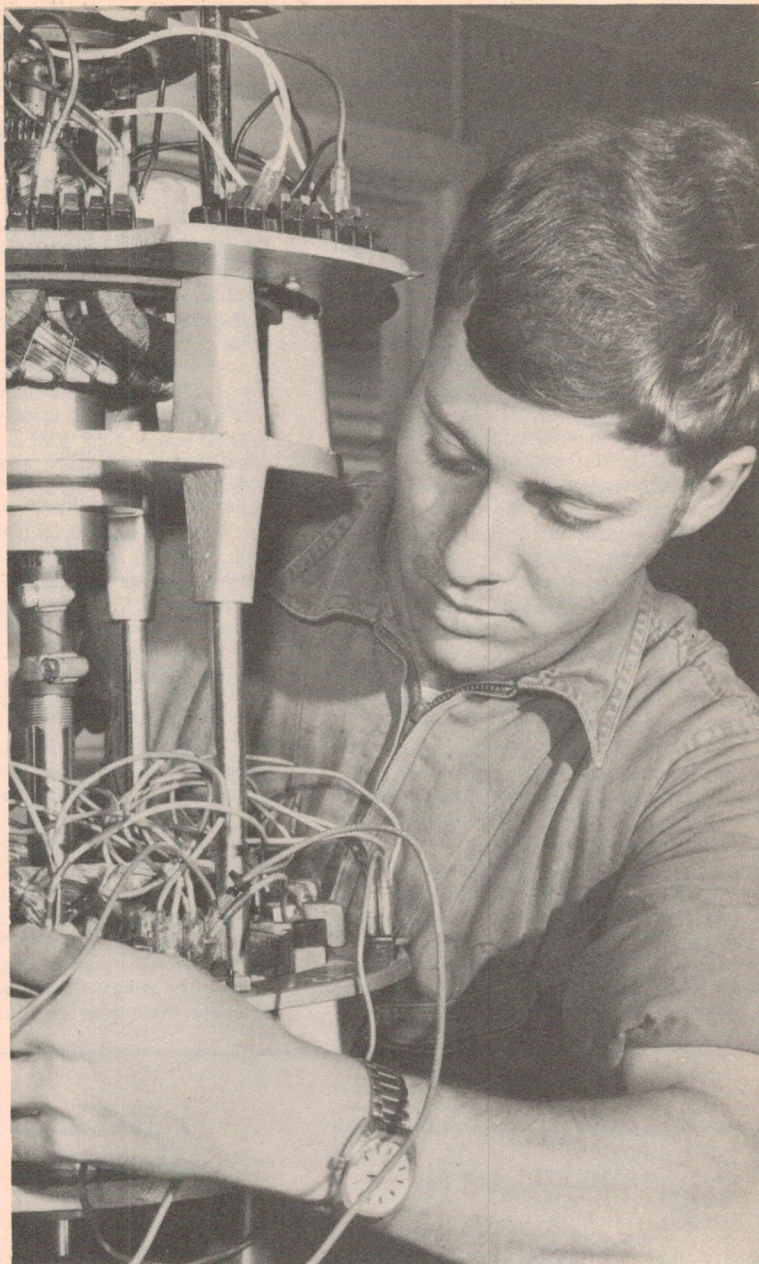

For further information, post this coupon.

To: Army Apprenticeships Counsellor, G.P.O. Box XYZ
(insert name of your nearest capital city and postcode)

Please send me details of ☐ Army Electronic and Electrical Trades Apprenticeships ☐ Adult Electronic Tradesman Trainee.

NAME: _____

DATE OF BIRTH: _____

ADDRESS: _____

POST-
CODE: _____

Join the Army

We're looking for more good men.

AAE40.FP.19

WE'VE PRICED OUR PRIME COMPONENTS TO GET THE LARGEST SHARE OF THE MARKET —

—and they just happen to be the best.

LINEAR

301A-8	Low noise Op Amp	70¢ (pack of two)
555-8	Timer	32¢
741-8	Op Amp	32¢
741CAN	Op Amp	55¢
LM3900	Quad Op Amp	90¢
LM3909	LED Flasher	\$1.20

MEMORY

2708	1K × 8 EPROM	\$16.50
2101A-4	1K STATIC	\$1.35
2114	1K × 4 STATIC	\$8.50
4116-20	16K × DYNAMIC	\$16.50

REGULATORS

7805P	Pos 1A 5V T0220	90¢
7812P	Pos 1A 12V T0220	90¢
7815P	Pos 1A 12V T0220	90¢
78H05	Pos 5V 5 Amp T03	\$8.00

TRANSFORMERS

PL12/5VA	P.C. Board MTG. 12V, 5VA	\$5.74
PL12/40VA	Low Profile 6-0-6 V, 40VA	\$9.44

PL18/20VA	Low Profile 9-0-9 V, 20VA	\$7.72
PL30-9/40VA	15-0-15 & 9 Volt, 40VA (for MPU)	\$14.40
PL30/40VA	15-0-15 Volt, 40VA	\$9.44
PL30/5VA	P.C. Board MTG. 30V, 5VA	\$5.74

MAGAZINES

KILOBOARD	Current Issue	\$4.00
	Back Issues	\$3.00
INTERFACE AGE	Current Issue	\$4.00
	Back Issues	\$3.00
PERSONAL COMPUTING	Current Issue	\$4.00
	Back Issues	\$3.00
BYTE	Current Issue	\$4.00
	Back Issues	\$3.00
E.T.I.	Current Issue	\$1.40
	Back Issues	\$1.00

PLEASE NOTE:— BYTE, Interface Age, Personal Computing and Kiloboard readers — Join our annual subscription list. Just send in Cheque/Money Order/Bankcard for \$53. We will look after the rest for you.

silicon valley '79

silicon valley BRANCHES

NEW SOUTH WALES
Silicon Valley
23 Chandos St., St. Leonards
Tel. (02) 439 2965

VICTORIA
Silicon Valley
380 Bridge Rd., Richmond.
Tel. (03) 429 4780

NEW ZEALAND
Silicon Valley
7-9 Kirk St., Grey Lynn.
Auckland. Tel. 76 1169

QUEENSLAND
Silicon Valley
22 Ross St., Newstead.
Tel. (07) 52 1339

SOUTH AUSTRALIA
Silicon Valley
170 Sturt St., Adelaide.
Tel. (08) 51 4080

DON'T FORGET OUR FAST EFFICIENT MAIL ORDER SERVICE MAILORDER

P.O. BOX 898, CROWS NEST,
2065. PHONE (02) 439 2965.

Add \$2 Post & Package to
all mail orders. Add \$4
for P & P to all
transformers.

RESELLERS

NEW SOUTH WALES
Electronic Distributors
Shop 4, PO Arcade, Joyce Street, Pendle Hill.
Tel. (02) 636 6566
Radcom
105 Eldridge Rd Bankstown
Tel. 02 709 4706
Pre-Pak Electronics
718 Parramatta Road, Croydon.
Tel. (02) 797 6144
Madjenk Lighting & Electronics
Shop 5, 246 Princes Highway, Dapto.
Tel. (042) 61 1785

Applied Technology P/L
109-111 Hunter Street, Hornsby.
Tel. (02) 476 4758
In-Electronics
84 Ramsay Street, Haberfield.
Tel. (02) 799 3331

Kit-Sets
657 Pittwater Road, Dee Why.
Tel. (02) 982 7500
Rendell Research
Ringwood Road,
Exeter. (Moss Vale)

Serv-U Appliance Centre
107 George Street, Bathurst.
Tel. (063) 31 1356

Radcom
105 Eldridge Rd Bankstown
Tel. 02 709 4706

A.C.T.
Dacom
29 Colbee Court, Philip.
Tel. (062) 82 3581

QUEENSLAND
Kit Sets
293 St. Pauls Terrace, Fortitude Valley
Tel. (07) 52 8391

Hunts Electronics
P.O. Box 546, Toowoomba.
Tel. (076) 32 9677

Technitron
63 Grange Street, Bundaberg

Southport Electronics Shop
9 Young Street, Southport.
Tel. (075) 32 3632

VICTORIA:

Rod Irving Electronics
499 High Street, Northcote.
Tel. (03) 489 8131

Stewart Electronics
240B Huntingdale Road, Huntingdale
Tel. (03) 543 3910

South West Electronics
119 Hopkins Street, Footscray
Tel. (03) 689 3819

SOUTH AUSTRALIA:

Northern Hi-Fi
Shop 41, Westland,
Whyalla. Norrie.
Tel. (086) 45 5766

Kitronics
Peel Street, Adelaide.
Tel. (08) 212 5505


WESTERN AUSTRALIA:

Atkins Carlyle
1-9 Milligan Street, Perth
Tel. (09) 321 0101

B.P. Electronics
11 Duke Street, Albany
Tel. (098) 41 2681

BATTERY CONDITION INDICATOR

Ever been caught by a battery that went flat at an embarrassing moment — like when you've just offered a friend a lift? The conversation goes a little flat when you're both riding the bus to work, 20 minutes late. Jonathan Scott found a solution ...

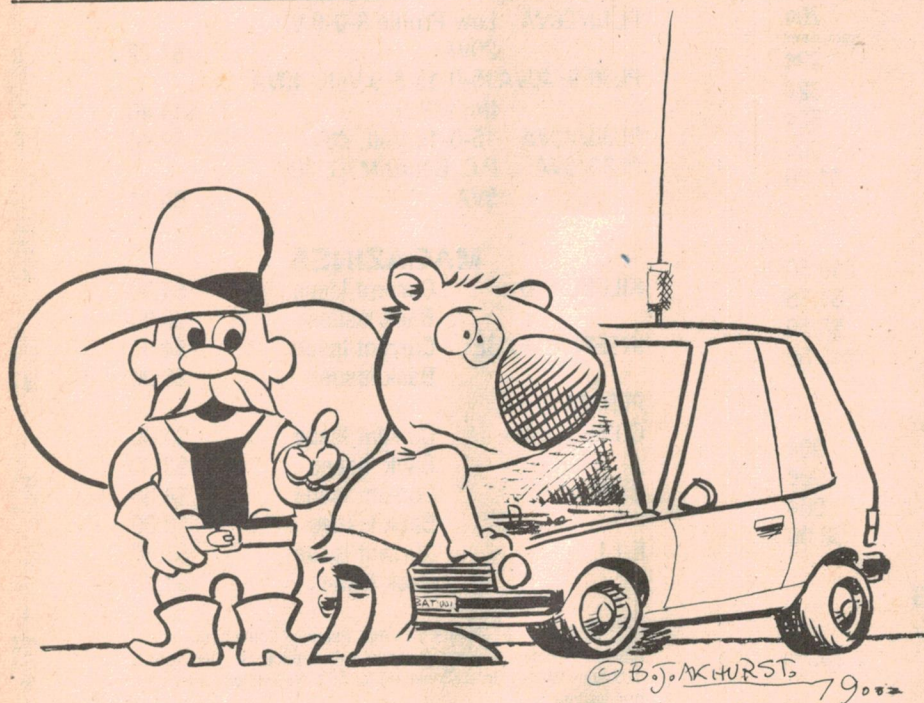

THE OLD, RELIABLE lead-acid battery may be way ahead of what ever is in second place for vehicle electrical systems, but they do need a 'weather eye' kept on them. Particularly if they're out of warranty. The same applies to 'reconditioned' batteries, so often found in secondhand vehicles of some age.

That's the problem with cars — running out of petrol and running out of battery produces the same heart-rending result. Immobility.

Most vehicles have a petrol gauge. Few have an equivalent for the battery. Many 'older' cars included a 'charging current' meter. This told you something about the car's generator-regulator and required some inter-


pretation to figure out whether the battery was in good health.


Probably the best way to check on the state of your battery is to use a hydrometer. However, hydrometers have a number of drawbacks. Being made of glass, they're fragile and can't be used while a car is in motion. The small amount of battery acid that remains on them presents a storage problem — the drips and fumes attack most metals and materials. They're okay for the corner garage but justifying their cost, for the occasional use they get in home workshops, is not always possible.

Another method of testing battery condition is by checking the voltage 'on load'. A lead-acid vehicle battery in a reasonable state of charge will have a


terminal voltage under normal working load somewhere between 11.6 and 14.2 volts. When a battery shows a terminal voltage below 11.6 volts its capacity is markedly decreased and it will discharge fairly quickly. Like as not, it won't turn the starter motor for very long! On the other hand, if the voltage on load is above 14.5 volts then the battery is definitely fully charged! However, if it remains that way for any length of time while the car is on the road, the vehicle's alternator-regulator system is faulty and the battery may be damaged by overcharging.

Reading the battery voltage can be done in a number of ways. You could use a digital panel meter, set up as a voltmeter. Their drawback is that they cost nearly ten times as much as a hydrometer! The next best method is to use an 'expanded-scale voltmeter'. Reading the voltage range between 11 and 15 volts on a meter face calibrated 0-16 volts is a squint-and-peer exercise. On a 0-30 volts scale, as used on many modern multimeters, it's worse. A meter which reads between 11 volts at the low end of the scale and 16 volts at the high end is ideal. Hence, the term 'expanded-scale'.

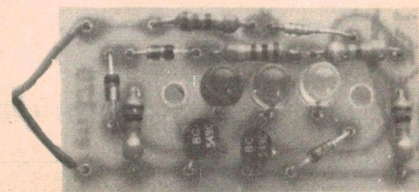

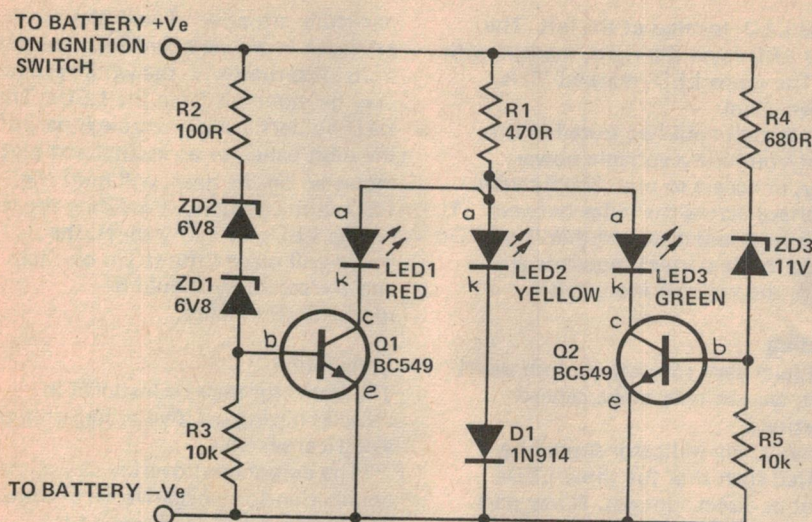

The circuit diagram and component overlay (below). During construction, make sure all of the diodes and LEDs are the right way round.

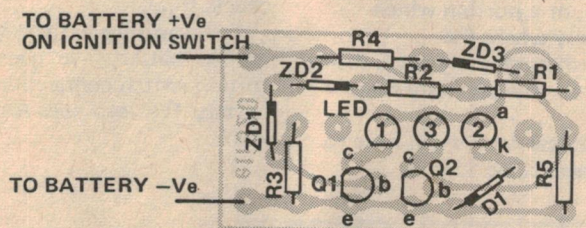

HOW IT WORKS – ETI 320

This circuit depends for its operation upon the different voltage drops across different colour LEDs.

At 20 mA the voltage drops across red, yellow and green LEDs are typically 1.7, 3.0 and 2.3 volts respectively. When the vehicle battery voltage is too low to cause either ZD1/ZD2 or ZD3 to conduct, Q1 and Q2 are held off by R3 and R5. Under these conditions the yellow LED is forward biased and conducts via D1 producing a potential of about 3.7 volts at point A (see circuit diagram). When the supply rises above about 11.6 volts ZD3 conducts, biasing Q2 on. By virtue of its lower voltage requirements the green LED conducts, reducing the voltage at point A to approximately 2.6 volts. This is not enough to bias D1/LED3 on, so the yellow LED goes off. The green LED 'steals' the bias from the yellow LED. When the supply rises above about 14.2 volts, Q1 is biased on and the red LED 'steals' the bias from the green. The potential at point A falls to two volts and only the red LED conducts.

R1 limits the current through the LEDs. R2 and R4 limit the base currents into Q1 and Q2.

PARTS LIST – ETI 320

Resistors all ¼W, 5%


R1 470R
R2 100R
R3, R5 10k
R4 680R

Semiconductors

D1 1N914
ZD1, ZD2 .. 6V8 400 mW zener
ZD3 11V 400 mW zener
Q1, Q2 BC547,8,9 or
BC107, 8, 9 or
common silicon
NPN type

Miscellaneous

pcb ETI 320
Aluminium angle bracket for under-dash mounting.

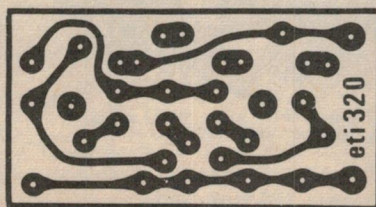

The printed circuit board pattern.

However, you don't want to be peering at a meter on the dash board when you're driving through traffic. The range of voltage over which your battery is healthy is some two volts. An indicator which simply requires the occasional glance, and needs no 'interpretation', is what is really needed.

With this project, that's exactly what we've done.

Go, caution, stop

We have devised a simple circuit that indicates as follows:

Yellow: battery 'low'
Green: battery okay
Red: battery overcharging

When the battery voltage is below 11.6 volts, a yellow indicator lights. This indicates the battery is most likely undercharged or a heavy load (such as high power driving lights) is drawing excess current. When it is between 11.7 and about 14.2 volts the green indicator lights, letting you know all is sweet. If the red indicator lights, as it will if the voltage rises above 14.2 volts, maybe the vehicle's voltage regulator needs adjusting or there is some other problem.

The circuit

The circuit is ingeniously simple, having barely a handful of parts. Reliability should be excellent.

We actually started out with a somewhat complex circuit. It used only two indicators and required you to 'interpret' what was happening. In trying to convert that to a yellow-green-red style of indication it sort of grew like topsy. This circuit had four transistors, a dozen resistors etc and didn't look at all attractive as a simple project that the average hobbyist or even handyman could build one Saturday afternoon and get going immediately. A rival circuit was devised by another staff member using a common IC. This sparked a controversy as to which was the better! Certainly, both did the job required ... but maybe there was a simpler method.

It was discovered that different coloured light emitting diodes (LEDs), which we had decided to use for the indicators in the project, had different voltage drops when run at the same current. Seizing on this idea, the original circuit (four transistors, a dozen resistors ...) was modified to exploit this characteristic and the simple circuit you see here was the result.

Construction

Construction is straightforward. If you haven't soldered electronic components

Project 320

before — and this project was designed for the motorist/handyman as well as electronics enthusiasts — then we suggest you practice on something before tackling this project. Soldering is one of those things like swimming or riding a bicycle, or sex — it's okay once you've done it once or twice but you don't practice out on the street!

We recommend you use the printed circuit board designed for this project. The actual layout of the components themselves is not critical but a printed circuit board reduces the possibility of errors.

It is best to mount and solder the resistors first. Follow this by soldering in the diodes D1 and the zener diodes ZD1, ZD2 and ZD3. Carefully follow the accompanying component overlay making sure the diodes are all inserted the correct way around. Next, mount the transistors, again referring to the overlay, checking to see they are inserted correctly before soldering.

Finally, mount the light emitting diodes. These too may only be inserted one way. Check with the component overlay and connection diagrams. Make sure they are in the correct sequence. On the component overlay, LED 1 is

the red LED, located at the left. The yellow LED is on the right, marked with a '2'. The green LED, marked '3' is between them.

The circuit could be tested at this stage if you have a variable power supply, or access to one. Simply vary the voltage across the range between 11 and 16 volts and note whether the LEDs light up in the correct sequence and close to the voltages indicated.

Mounting

As vehicles vary so much in dash panel layout, we can only make general suggestions.

Clearly, the indicator should be mounted such that the three LEDs are not in direct sunlight. A low part of the dash, but make sure it's readily visible from your normal driving position, will pretty well ensure the display may be easily read during the daytime. Alternatively, if you have an 'overhung' dash, or a portion which overhangs (usually where the instruments are mounted anyway), then a suitable position will generally suggest itself.

Exact mechanical details will have to be determined according to your

particular situation. Two holes are provided in the pc board for mounting bolts. Alternatively, the whole assembly may be mounted from the LEDs. Three LED holders inserted through part of the dash panel, or an escutcheon plate mounted on the dash, will hold the LEDs quite securely. Providing the leads on the LEDs are fairly short, the pc board will place little strain on them and the assembly should be mechanically secure.

Connection

The indicator may be installed in vehicles having positive or negative earth electrical systems.

The component overlay shows the connection for a **negative** earth vehicle. The 'battery +ve' lead goes to the ignition switch — the indicator only operates when the vehicle is being used — the battery negative lead should be taken to a good 'earth' point on the vehicle frame.

For a **positive** earth vehicle, the lead marked 'battery -ve' goes to the ignition switch connection, while the 'battery +ve' lead goes to the vehicle frame.

TRANSPAC

A TRADENAME OF THE TRANSIENT GROUP

Inexpensive prepacked components from top manufacturers.

NOW YOU CAN BUY
PREPACKED ELECTRONIC
COMPONENTS IN SMALL
QUANTITY PACKS AND SAVE!

From your local
stockist or mail
order (45c P&P)



**Included in the ever-expanding
range of Transpacs are:

PACK PRICING EXAMPLES:

S101 2x7400's 49c
S104 2x7410's 49c
S108 2x7421's 56c
S201 *10xRed led's \$1.95c
S302 5x2N3638A's \$1.09c
H101 5x8 pin I.C. sock. \$1.05c

Capacitors,
resistors,
chokes,
transistors
linear
and digital
I.C.'s & sockets, nuts & bolts, solder, switches, knobs,
tagstrips, veropins, regulators, fuses, optos, thermistors, etc.
etc

197 Shannon Ave, Geelong West. 3218. Phone: (052) 9-2115
(Due to delivery costs prices may vary between stockists)

TRANSPACS ARE A NEW
WAY TO BUY FULL SPEC.
COMPONENTS AT VERY
REASONABLE PRICES.
SEMICONDUCTOR PACKS ARE
SUPPLIED WITH RELEVANT
DATA AS AN AID TO THE
CONSTRUCTOR.

CUSTOMER INFORMATION

Please mark relevant box.

- ☐ Price list required.
☐ We are interested in becoming TRANSPAC stockists.

NAME.....

ADDRESS.....

..... P/C.....


ETI 2/9



BUILD A COMPUTER KIT AND SAVE

KB05 FULLY ENCODED KEYBOARD

Eliminates messy wiring between keyswitches and encoder. The KB05 is a full featured keyboard kit fully encoded for all 128 ASCII characters. Based on a design published in ELEKTOR November, 1978, it is an ideal low cost keyboard for microcomputer use. This clever design uses a single sided PCB to connect the switches and the encoder IC and few links are required. The kit includes 2 spare user definable keys and a metal mounting bracket to hold each switch accurately in place. The switches are supported on this bracket **not** on the PCB as with inferior designs. Spare mechanisms, cursor option and number pads are available.



KB05 encoded keyboard kit \$84.00
KB06 cursor option \$4.95
KB07 number pad \$11.95

EA2650 STARTERS KIT

Described in EA May, 1978, this is an ideal project ideal for the beginner or educational applications. The kit comes complete with all instructions for assembling and running the 2650 computer, all components including 2650 microprocessor, PIPBUG ROM and 1K of RAM. The kit can be expanded to 4K and requires a serial terminal such as the EA LOW COST VDU detailed below. Sample programs are included for you to run and a cassette interface can be readily added so that programs can be stored on low cost cassettes.



EA2650 starters kit \$65.00

EA LOW COST VDU SELLOUT!

This low cost stand alone VDU was described in EA February, 1978. Accepts parallel ASCII input and produces 16 lines with 32 characters per line with onboard sync generation and video driver. Supplies direct video to a converted TV set or to an RF modulator if required. The kit includes sockets for the RAM and character generator IC's, all components plated thru PCB, and step by step instruction manual.

EA VDU sellout (until stocks cleared)
\$75.00 save \$22.50!!

All prices include sales tax and are subject to change without notice. Our full technical support and service backup is available on all these kits.

Mail Orders: Box 355, P.O. Hornsby 2077. Please allow \$2.00 towards post and packing.


Applied Technology Pty. Ltd.,
1a Pattison Ave., Waitara N.S.W.
(9 to 5 Mon. to Sat.)

DG640 VDU ON S-100 BUS

A most professional unit for serious microcomputer users. Features 16 lines and 64 characters (32 with strap select), upper and lower case with chunky graphics and full S-100 bus standard.

This is not a half kit! The DG640 kit includes:


- professional quality plated thru hole PCB with hard gold edge connector.
- all prime quality guaranteed components.
- sockets for all integrated circuits.
- 12,000M/C crystal.
- comprehensive owners manual (54 pages) describing assembly, troubleshooting, and operating software for 2650, Z80, 8080, 6800.



DG640 kit \$149.50 (PCB with manual \$35.00)

EUROCARD 2650 SINGLE BOARD EXPANDABLE 2650 COMPUTER

This professionally engineered 2650 single board computer is the answer to all those who want a systematically expandable computer system. The DB1001 uses a simple E58 bus which is readily adapted to S100 and Z80 bus requirements. The DB1001 uses the 2650A chip and has fully buffered address and data lines, on board 1K operating system in Eprom (PIPBUG SUPPLIED but easily reprogrammed), 1K RAM and a crystal controlled clock on a top quality plated thru PCB with hard gold edge connector. Readily expanded on the E58 bus for more memory, I/O and will accept floppy discs and high speed printer. The kit is supplied with all components, owners manual and full service backup. A conversion kit for the EA2650 is available.

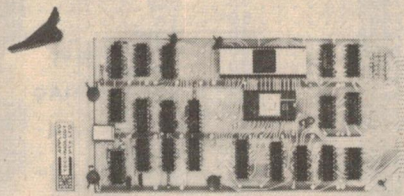

DB1001 single board computer \$135.00
(\$35.00 PCB with manual)
DB1001/EA2650 conversion kit \$99.00

DB1008 8K STATIC 2114 RAM


A very useful add on memory module to support the DB1001 computer on the E58 bus, this 8K RAM is fully buffered and has been arranged as 2 4K blocks with DIP switch address boundary selection. The kit is supplied with all components, sockets for all memory IC's and a plated thru PCB with hard gold edge connectors and full instruction manual.



DB1008 8K memory kit \$175.00
(\$35.00 PCB with manual)

EPS100 ECONOMY POWER SUPPLY

This popular modular power supply kit is ideal for use with micros. Based on the EA "BRUTE" power supply the EPS100 supplies 5V @10A regulated, +, - 12V @1A regulated as well as unregulated 8V, +, - 16V for the S100 BUS. The module includes an on board heatsink which must be mounted on a suitable metal case for adequate heatsinking.

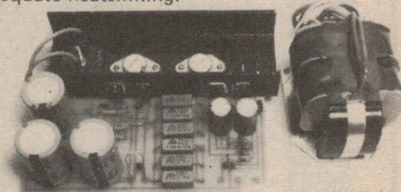

EPS100 power supply kit \$60.00

ET1632 UART/BAUD RATE GENERATOR

Converts serial to parallel and parallel to serial. This low cost baud rate generator can be set for any speed from 50 to 9600 BAUD (continuously adjustable with multi turn trimpot) and can be set for 5 to 8 bits per character with 1 or 2 length stop bits. Requires +5V, -12V. and kit includes all components and 40 pin socket.

632U with full instructions \$18.50

ETI 630 HEX ENCODER/DISPLAY

This simple kit includes a pair of 4 bit encoder/latches driving large .5" digits to display the HEX equivalent of any 8 bit data word. Ideal for troubleshooting and also programming in machine code.

ETI630 HEX DISPLAY \$14.50


SECI CASSETTE INTERFACE

This reliable unit is easily aligned without a CRO and is KANSAS CITY STANDARD useable up to 1200 Baud. The SECI uses top quality multiturn trim pots for accurate long-term timing adjustments and is supplied with the clock preset to 4800 Hz. A computer generated test tape is included so that you can readily check the operation at any time. Connects directly to a low cost tape recorder and has TTL level input/output for connection to the microprocessor. Requires +5V and provision for optional regulator has been made on the PCB.

SECI Cassette interface kit \$24.50

DB1048 4/8K ROM BOARD WITH HIGH SPEED CASSETTE INTERFACE

This card supports the DB1001 on the E58 bus and has provision for 2708 or 2716 EPROMS. Included on the board is a software controlled cassette interface (300 characters/sec!) controlling two tape recorders with full file handling. The DB1048 is supplied with a preprogrammed EPROM with the tape interface software, a utility tape with useful routines, all components, plated thru PSB and owners manual.



DB1048 ROM Board/Cassette interface \$130.00

TASMAN ELECTRONICS

12 Victoria Street,
COBURG, 3058.
Phone (03) 354-5062.

Open Mon-Thur 9am-5.30pm. Fri 9am-9pm. Sat 9am-12 noon.
Mail Orders — please add 70c minimum post and pack.

TRANSISTORS

AC127	1.25
AC128	80
AD149	2.60
BC107	35
BC108	35
BC109	35
BC109C	40
BC177	38
BC318	22
BC319	22
BC320	22
BC337	24
BC338	24
BC547	24
BC548	24
BC549	24
BC557	24
BC558	24
BC559	24
BD139	50
BD140	50
BD262	1.20
BD263	1.20
BFX84	82
BFY50	80
BFY51	80
BF115	68
MJ2955	85
MJE2955	1.89
MPF102	47
TIP31A	70
TIP31C	75
TIP32C	82
2N2219	46
2N2222A	40
2N2368	25
2N2646	1.15
2N2647	1.15
2N2904	50
2N2905	50
2N2905A	50
2N2907	45
2N3107	1.00
2N3053	50
2N3054	1.20
2N3055	75
2N3300	75
2N3642	35
2N3702	16
2N3704	29
2N3740	1.70
2N3904	29
2N4030	92
2N4032	97
2N4033	1.30
2N4036	1.53
2N4037	1.15
2N4231	99
2N4234	1.87
2N4238	1.67
2N5088	30
2N5871	1.53
2N5872	2.05
2N5873	1.53
2N5874	1.67
2N6124	92
2N6126	1.11
2N6129	1.28
2N6130	1.43
2N6132	1.43
2N6134	1.53
MPS3565	18
MPS3638	19
PN3565	18
PN3566	18
PN3567	18
PN3568	18
PN3569	18
PN3638	18
PN3638A	22
PN3641	20
PN3642	20
PN3643	20
PN3644	22
PN3645	22
PN3646	22
PN3693	29
PN3694	29
PN4121	35
PN4248	22
PN4250	29
PN4355	29

74LS

74LS00	20
74LS01	30
74LS02	25
74LS03	25
74LS04	20

74LS05	30
74LS08	25
74LS09	30
74LS10	25
74LS11	30
74LS12	30
74LS14	95
74LS20	28
74LS21	30
74LS27	30
74LS28	40
74LS30	30
74LS32	30
74LS37	38
74LS38	38
74LS40	30
74LS42	70
74LS73	60
74LS74	46
74LS75	55
74LS78	50
74LS85	1.40
74LS86	50
74LS90	70
74LS92	1.10
74LS93	80
74LS95	1.00
74LS109	50
74LS113	50
74LS114	50
74LS125	70
74LS133	30
74LS138	1.10
74LS151	1.15
74LS157	75
74LS160	90
74LS163	1.15
74LS164	1.30
74LS165	1.15
74LS169	70
74LS174	70
74LS175	85
74LS190	1.25
74LS191	1.20
74LS192	1.15
74LS193	1.10
74LS194	1.15
74LS195	1.00
74LS196	1.20
74LS197	1.50
74LS251	85
74LS253	85
74LS257	85
74LS259	3.30
74LS279	55
74LS290	1.70
74LS365	70
74LS366	70
74LS367	70

CMOS

4000	25
4001	25
4002	25
4007	30
4008	1.20
4011	25
4012	25
4013	52
4014	1.30
4015	1.30
4016	50
4017	1.30
4018	1.20
4020	1.40
4021	1.30
4022	1.30
4023	25
4024	90
4025	35
4027	70
4028	95
4040	1.30
4042	1.10
4043	95
4044	95
4046	1.55
4049	55
4050	55
4051	1.20
4052	1.20
4053	1.20
4060	2.20
4066	75
4068	35
4069	30
4070	35
4071	35
4072	35
7076	1.75

4077	35
4078	35
4081	35
4082	35
4093	70
4441	95
4502	1.20
4506	60
4510	1.40
4511	1.30
4518	1.40
4520	1.40
4528	1.20
4553	6.99
4555	1.10
4581	3.00
4582	1.00
4584	75
40014	60
40097	90
40098	90
74C02	35
74C04	40
74C08	40
74C10	1.60
74C14	1.45
74C20	2.40
74C28	1.10
74C73	1.15
74C76	1.15
74C90	1.50
74C93	1.50
74C175	1.75
74C192	1.85
74C193	1.85

TTL

7400	20
7401	20
7402	25
7403	25
7404	20
7405	25
7406	45
7407	45
7408	30
7409	34
7410	30
7413	54
7414	45
7416	50
7417	45
7420	30
7421	30
7422	30
7426	40
7427	40
7430	30
7432	40
7437	50
7438	40
7439	40
7440	30
7442	83
7447	90
7448	95
7450	30
7451	30
7453	30
7454	30
7460	30
7470	50
7472	45
7473	50
7474	50
7475	65
7476	40
7480	95
7483	1.10
7485	1.40
7486	50
7489	2.90
7490	40
7491	1.00
7492	70
7493	40
7494	1.05
7495	92
74100	1.95
74107	55
74121	50
74123	85
74132	1.10
74145	1.80
47150	1.60
74151	1.00
74153	1.00
74154	1.40
74157	1.00
74160	1.30
74165	1.45

74172	1.10
74173	2.40
74175	1.45
74180	1.12
74188	2.50
74192	1.33
74193	1.33
74367	1.00

VOLT. REG

7805	1.00
7812	1.00
7815	1.00
7818	1.00
7824	1.00
78H05	7.50
78H12	7.50
78H15	7.95
78L05	40
78L12	40
78L15	40
78L18	40
78L24	40
7905	1.50
7908	1.45
7912	1.50
9715	1.50
7918	1.50
7924	1.50
79HG	9.95
79L03	80
79L15	80
79L18	80
79L24	80
78CB	2.30
723	50
309	1.90
317	2.90

DIODES

AAY30	30
OA90	15
OA91	15
1N3493	1.70
1N3493R	1.70
1N4002	11
1N4004	11
1N4007	20
1N4148	06
1N5401	43
1N5404	43
1N5408	45

BRIDGES

W02	90
VM48dl	1.25
MDA3501	3.40

ZENERS

1/2W	19
1W	30
2 1/2W	65
same price, all voltages	

SCR's/TRIAC

C103yy	99
C106D1	65
C106Y1	39
C122D1	1.80
SC141D	1.30

ELECTRO. CAPS. CAN TYPE

2500uf/34V, RP	1.35
5600uf/40V, RP	1.99
6800uf/50V, RG	4.80
Computer Grade PW.	
6800uf/16V	6.85
10000uf/16V	9.15
6800uf/16V	23.70
10000uf/25V	10.30
15000uf/25V	12.20
20000uf/25V	14.50
27000uf/35V	26.00
2900uf/40V	7.15
10000uf/40	14.20
22000uf/40V	24.85

POLYESTER GREENCAPS

0.001-0.018/100V	10
0.022-0.033/100V	11
0.039-0.056/100V	13
0.068-0.082/100V	16
0.10uf/100V	19
0.12uf-0.18/100V	20
0.22uf/100V	30
0.27uf/250V	30
0.33uf/250V	34
0.39uf/250V	44
0.47uf/250V	47
0.47uf/630V	28

LINEAR IC's

301	40
307	86
308	1.20
311	75
324	1.25
380	1.70
381	2.87
3900	99
555	35
556	1.20
565	3.45
567	3.12
741	30
747	1.15
CA3046	1.65
CA3140	1.50
MC1494L	6.65
RC4136	1.45
TL071	73
TL080	1.15
TL081	52
TL082	95
TL084	1.90
709	65

MICRO etc

SYP2102A-4	1.90
2708	15.00
93448	10.20
1488	96

OPTO

9368	1.90
MCT2	65
FND357	1.40
FND500	1.58
DL747	3.50
LED red	20
LED green	30
LED amb.	43
LED TIL209	18

RESISTORS

1/2W, E24	03
1W, E12	07
5W, W/W	25
Min. Presets	18
Min. Trimpots	48
Min. M/Turn	1.25

TANTALUMS

0.1-1uf, 35V	15
1.5 uf, 35V	20
2.2uf, 35V	25
3.3uf, 35V	25
4.7uf, 35V	25
6.8uf, 35V	30
10uf, 25V	25
15uf, 35V	55
22uf, 35V	55
33uf, 10V	35
47uf, 6.3V	30
4.7uf, 16V	20

CERAMICS

1pf to 0.0047	05
0.0056-0.01	08
0.022-0.1	12
0.22uf	18
0.47uf	28

0.47uf/630V	60
1uf/250V	55

WIRE & CABLE

Speaker Wire, per mt.	17
Mic. Cable 1c, per mt.	25
Phone Cable 4c, per mt.	25
TV Ribbon, cl/bk, per mt.	20
Coax 75 ohm per mt.	35
H/U Wire, 7/254, per mt.	10
H/U Wire, 10/254, per mt.	12
H/U Wire, 617K1/11, per mt.	20

FUSEHOLDERS 3AG —

Panel Mount	65
In Line Type	28
PCMount	46

FUSES, 3AG —

Project 799

FM TUNA



ONE THING we've never done a constructional article on up to now is food. Why not, you cry? Why not indeed, comes the reply.

In this April issue, we've decided to break with tradition and give our readers what they really want — a decent meal.

Why, some of the poor souls who attend our 'synergistic beer drinking' sessions have subsisted for so long on liquids that it's all they can do to force down a second packet of peanuts.

Enough of this, we've decided. ETI now proudly presents the first — the very first — FM Tuna.

Construction

First, buy a can of Tuna. This shouldn't be too difficult, although a certain large retail business based

in Sydney is known *not* to stock them. We hear they're thinking of importing 400 dozen cans later this month, though. This will probably mean another iceberg to keep them cool.

Having bought your tuna, open the can. To do this, grasp the tin firmly in a vice (drinking and gambling being the least energetic of these) and then go and buy a tin opener.

(By the way, did you hear the one about the engineer, the chemist and the economist trapped on a desert island with a tin of tuna and no can opener? The engineer suggested that they smash the can flat with a rock and then pick out the pieces of fish. The chemist said that wouldn't do and that they should dump the can in the sea and wait for the

metal to rust away. The economist stroked his beard, looked into the middle distance and said "First, let's assume we have a can opener . . .".)

Having opened the can, buy a tin of bandages and repair any minor damage you may have done to your fingers or other protruberances which may have got in the way while opening it.

The tuna should now be emptied onto a plate by turning the can a full one hundred and eighty degrees around its long axis and giving a couple of taps on the (now) uppermost side with a small wrench.

Place small pieces of tuna (about two to three cubic centimetres each) into your mouth. After that, you'll have to use your common sense.



DAVID REID ELECTRONICS PTY. LTD.

The new breed in electronics service - 104-106 KING ST. NEWTOWN. NSW. PO BOX 317

Waiting on delays and shortages with other mail-order electronic suppliers? At David Reid we guarantee to ship or reply within 24 hours. Once more, we have one of the largest ranges of electronic

components under one roof in Australia. If you haven't done business with us before, you've been missing out. On service!

C/MOS


TP4001AN	Quad 2 input nor gate	.44
TP4007AN	Dual complementary pair plus inverter	.44
TP4011AN	Quad 2 input nand gate	.44
TP4012AN	Dual 4 input nand gate	.44
TP4013AN	Dual D type flip flop with reset	1.16
TP4015AN	Dual 4 stage shift register	1.95
TP4016AN	Quad bi-lateral switch	1.16
TP4017AN	Decade counter/divider	2.10
TP4018AN	Presetable divide by 'N' counter	2.65
TP4022AN	Divide by 8 counter with 8 decoder outputs	1.99
TP4023AN	Triple 3 input nand gate	.44
TP4024AN	7 stage ripple counter	1.25
TP4027AN	Dual JK type flip flop with reset	1.16
TP4028AN	B.C.D. to decimal decoder	1.85
TP4043AN	MOS tri level nor and latch	1.95
TP4049AN	Hex. buffer/converter (inverting)	1.10
TP4050AN	Hex. buffer/converter (non inverting)	1.10
TP4051AN	Single 8 channel multiplexes	1.85
TP4304AN	Schmidt trigger hex	1.65
TP4306AN	Dual Schmidt trigger	1.65

NEW PRODUCTS

TL081 single .65c
TL082 dual \$1.20
TL084 quad \$2.00
Bi-Fet Op Amps
LM3909..\$1.50
Universal Test
Lead Kits \$5.65
IC Clip Series
MJ029\$4.55
MJ030\$4.75
MJ031\$3.25


LP3 Probe \$80.50

PCI BOX



Price Reduction
NOW \$4.05

By popular
demand



OT2 multimeters

20K ohms/VDC 10K ohm/VAC
Specifications: 0-2.5, 10, 50, 250 and 1000V DC; 0-10, 50, 250, 500 and 1000V AC; 0-50uA, 25mA and 250mA DC Current; 0-500, 5K and 50K ohms resistance.

\$23.95

Exclusive to David Reid Electronics while stocks last.

POST

Mail Order Instructions: Minimum P&P \$1.00. Orders over \$9.99 must include additional postal charges (see below).
ORDER VALUE Charge
\$5-\$9.99.....Nil
\$10-\$24.99.....\$0.50
\$25-\$49.99.....\$1.50
\$50-\$99.99.....\$2.50
\$100 or more.....\$4.00

SEMICONDUCTORS

SN7400N	Quad 2 input nand gate	.44
SN7401N	Quad 2 input nand gate open/collector	.44
SN7402N	Quad 2 input nor gate	.44
SN7403N	Quad 2 input nand gate open/collector	.44
SN7404N	Hex inverter	.44
SN7405N	Hex inverter open/collector	.44
SN7407N	Hex buffer/driver (30V open/collector)	.75
SN7408N	Quad 2 input nand gate	.44
SN7410N	Triple 4 input nand Schmitt trigger	.44
SN7412N	Triple input nand	.44
SN7413N	Dual 4 input nand Schmitt trigger	.90
SN7420N	Dual 4 input nand gate	.44
SN7430N	Single 8 input nand gate	.44
SN7432N	Quad 2 input nor gate	.65
SN7437N	Quad 2 input nand buffer	.75
SN7442N	B.C.D. to decimal decoder/driver	1.10
SN7447AN	B.C.D. to 7 seg. decoder/driver 15V	1.65
SN7448AN	B.C.D. to 7 seg. decoder/driver	1.55
SN7454N	4 wide 2 and-or-invert gate	.44
SN7460N	Dual 4 input expander	.44
SN7472N	JK m/s flip flop	.75
SN7473N	Dual JK m/s flip flop	.85
SN7474N	Dual D flip flop	.90
SN7475N	4 bit latch	1.10
SN7476N	Dual JK m/s flip flop	1.10
SN7483AN	4 bit full adder	1.65
SN7486N	Quad exclusive OR gate	.75
SN7490AN	Decade counter	.90
SN7492AN	Divide by 12 counter	.85
SN7493AN	Binary counter	.85
SN7495AN	4 bit right/left shift register	1.50
SN7496N	5 bit shift register	1.90
SN74107N	Dual JK m/s flip flop	.75
SN74121N	1 shot multi vibrator	.79
SN74122N	Retriggerable monostable multi vibrator	.95
SN74123N	Dual retriggerable monostable multi vibrator with clear	1.10
SN74141N	B.D.C. to decimal decoder/driver	2.88
SN74145N	B.C.D. to decimal decoder/driver	1.95
SN74154N	4 line-16 line decoders/demultiplexers	2.10
SN74192N	Up/down binary counter	2.10
SN74193N	4 bit up/down counter (dual clock with clear)	2.10
SN74199N	8 bit parll. access shift register	3.75

Zener Diodes

1/2 Watt	volts	1 Watt	volts
BZX83C-3V0	3	IS3006A	6.1
BZX83C-3V3	3.3	IS3007A	6.8
BZX83C-3V9	3.9	IS3008A	8.2
BZX83C-4V7	4.7	IS3009A	9.1
BZX83C-5V1	5.1	IS3010A	10
BZX83C-5V6	5.6	IS3012A	12
BZX83C-6V2	6.2	IS3015A	15
BZX83C-6V8	6.8	IS3016A	16
BZX83C-7V5	7.5	IS3020A	20
BZX83C-8V2	8.2	IS3024A	24
BZX83C-9V1	9.1	IS3027A	27
BZX83C-10	10	IS3030A	30
BZX83C-12	12	IS3033A	33
BZX83C-13	13	IS3036A	36
BZX83C-15	15	IS3039A	39
BZX83C-16	16	IS3047A	47
BZX83C-18	18	IS3051A	51
BZX83C-20	20	IS3056A	56
BZX83C-22	22	IS3062A	62
BZX83C-24	24	IS3068A	68
BZX83C-27	27	IS3075A	75
BZX83C-30	30	IS3100A	100
BZX83C-33	33	IS3150A	150
BZX83C-47	47	IS3180A	180
		IS3200A	200

All 1/2W only 30c ea. All 1W only 65c ea.

We regret that prices are subject to change without notice. E. & O.E.



Look at these Specs!

12" Range 30 Watt RMS

The frames of this range are pressure die cast in high rigidity, top quality aluminium alloy. The 30 watt models use a 4" magnet with a 1 1/4" coil wound on a half-hard brass former. Polarised self-connect terminals are fitted and all speakers are finished in stylish black with facility for front or rear mounting.

LA12/30WA medium power woofer with a 25Hz free air resonance. This unit has a frequency response extending to 300Hz and is suitable for a two or three way hi fi speaker system. The cone is a semi-rigid "ribbed body" with a foam half roll surround.

LA12/30T

Utilising the same semi-rigid "ribbed body" cone fitted with half roll surround as the LA12/30W, this unit incorporates a sub-cone, or whizzer, which gives a 25Hz-12000Hz frequency response. Ideal for single or dual hi fidelity enclosures.

LA12/30G

This speaker has been designed for musical instrument use. It features a "seamed" cone, an aluminium centre dome and is ideal for medium power electronic organs, power guitar amplifiers, P.A. systems, disco systems. Free air resonance is 65Hz and extends to 500Hz.

12" Range 50 Watt RMS

These use the same frames and features as the 30 watt range except 5" diameter magnets are used with 2" high temperature coils wound on anodised aluminium formers.

LA12/50W

This is fitted with a high mass woofer cone mounted on a foam half roll surround. Free air resonance is 20Hz and the frequency response extends to 200Hz. This unit is ideal for high power, high quality acoustic suspension systems.

LA12/50G

Designed specifically for musical instrument applications, this speaker has many features. In standard form it includes a stiff edged, roll doped rigid cone and is fitted with an aluminium anodised centre dome. The unit is a superb lead guitar, rhythm guitar, electronic organ speaker. Free air resonance is 52Hz and response covers frequencies to 8000Hz.

30 Watt

LA12/30W	\$47.50
LA12/30T	\$46.50
LA12/30G	\$45.50

50 Watt

LA12/50W	\$54.50
LA12/50G	\$54.50
LA15/100G	\$81.33



DON'T MISS THESE GREAT ELECTROBOT SAVINGS

WE'LL GET YOU INTO ELECTRONICS.

ONE WAY OR ANOTHER.

At International Correspondence Schools, we have at least 15 career courses you can take in electronics and other inter-related fields, like computers and television. These are the fields of the future that you *should*

progress in now. And they are all ideally suited to home study. And ICS, being the largest institution of its kind in the world, has access to the latest world-wide developments and among the best teachers Australia has to

offer. So, if you're interested in one or more of the courses below, mail the coupon to ICS, and we'll send back everything you need to begin a more successful career.

1 Basic Electronics course for a sound knowledge of radio theory and the industrial applications of electronics.

2 Electronic Technician course, with specialist courses in Audio, Radio, Hi-Fi; Communications/Broadcasting; Electronic Computer Servicing; Industrial Electronics.


3 Electronic Instrumentation and Control Systems course for electronics technicians interested in industrial instrumentation and control.

4 Electronic Technology, a program that will fit the ambitious technician for wide variety of jobs.

5 Electronics Maintenance for basic principles and electronic theory, followed by a practical section of maintenance procedures and techniques.

6 Radio Electronic Telemetry covers electrical and electronic aspects of telemetering. Employment opportunities abound in this very modern field.

7 Amateur Radio Operator's Certificate of Proficiency prepares you for the examination

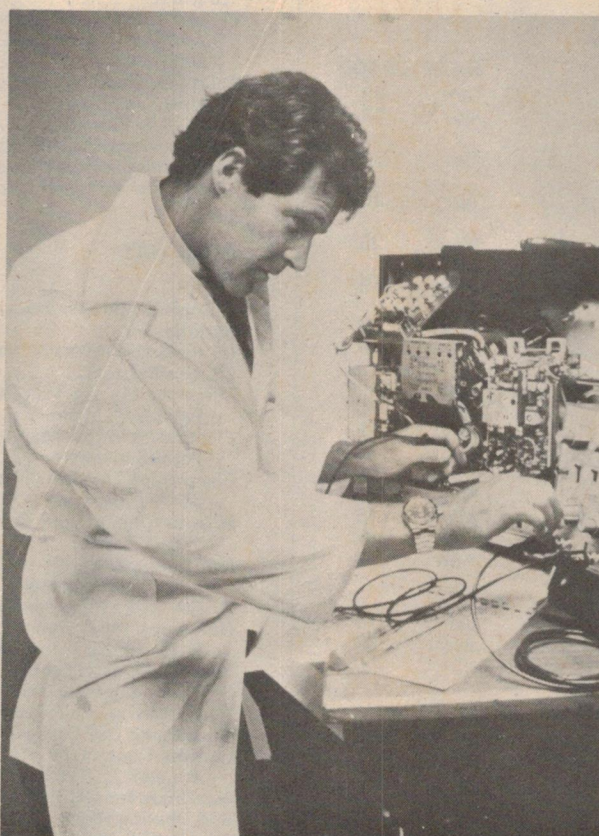

leading to the Certificate of Proficiency issued by the Postal and Telecommunications Department.

8 Data Processing, various courses including Electronic Computer Servicing.

9 TV Servicing courses, in black and white, and PAL colour.

10 TV Principles course for basic television technology. And TV engineering course for complete practical coverage of television engineering.

11 Basic Electrical Engineering is especially for those who want to make a start in the industry or want a broad technical knowledge.

12 Electrical and Electronic Drafting is designed for experienced draftsmen wishing to enter this specialised field.

13 Automobile Electrician gives you the basics of servicing the automobile's electrical system.

14 Industrial Electrician course gives comprehensive training on all aspects of the electrician's work.

15 Electrical Mechanic course prepares you for external examinations.

Please send me, without cost or obligation, information about the ICS courses in Electronics.

Mr/Ms

Address Phone

Postcode Occupation Age Tick here if currently full time student ☐

Write to your nearest ICS city:

ICS

International Correspondence Schools

Sydney: 400 Pacific Highway, Crows Nest, N.S.W. 2065. Tel.: (02) 43 2121.

Melbourne: 18-20 Collins Street, Melbourne, Vic. 3000. Tel.: (03) 63 7327.

Perth: G.P.O. Box D157, Perth, W.A. 6001. Tel.: (09) 32 1850.

New Zealand: 182 Wakefield Street, Wellington.



226028 Bankcard

ICS1700ET

INDEX 1977

AUDIO

TITLE	DATE	PAGE
AM Stereo	July	12
Another Noise, Another Reduction	June	20
Chartwell LS3/5A Monitor Speakers	Aug	21
Consumer Electronics Show Success	Sept	21
Damping and SME	June	20
Disctraker	Dec	25
Elcaset — What Future?	Oct	21
Heil Bass Driver	Oct	19
Is Phase just a Craze?	Nov	21
Linn Sondek LP12	July	15
More Quad	Nov	22
Nakamichi Spoken Here	June	21
Rega & Armstrong	Dec	26
Solid State Keying for Electronic Organs		
— Nick Labordus	Oct	30
Speakers	June	21
The Rock Show — Sound System		
— Howard Page	Apr	17
Transmission Line Speakers — ETI 495		
— Richard Timmins	Aug	11

COMPONENTS

TITLE	DATE	PAGE
Active Filter Cookbook — Tim Orr	Oct	53
Batteries	Nov	38
Care & Feeding of RF Power Transistors		
— Roger Harrison & Phil Wait	Nov	30
555 Timer Applications — R M Marston		
— Part 1	Apr	30
555 Timer Applications — R M Marston		
— Part 2	May	20
555 Timer Applications — R M Marston		
— Part 3	June	45
555 Timer Applications — R M Marston		
— Part 4	July	82
Liquid Crystal Displays — Robin Moorshead	Sept	15
Metal Glaze (cermer) Resistors, wirewound		
and miscellaneous special types — Roger Harrison	Feb	27
More on VCT — Ron Harris	Aug	40
Potentiometers — Roger Harrison	Apr	77
Printed Circuit Boards — Design and Production	Dec	58
RF Chokes — Roger Harrison	May	71
Recharging Dry Batteries	Nov	45
Resistor Codes — Roger Harrison	Mar	16
The Challenge of 1 ² L — Brian Dance	Feb	19
The 741 Cookbook	Aug	49
VCT an Invention that will change the face of		
electronics — Ron Harris talks to Professor		
Gosling of Bath University	Jan	30
Varicaps for AM — Brian Dance	Sept	88

COMPUTERS

TITLE	DATE	PAGE
ACS/CCAE Microprocessor Conference		
— Les Bell — Canberra	Oct	90
Book Review 101 — Basic Computer Games	Feb	63
Computers for Small Businesses — Les Bell	Oct	39
8080 Octal Monitor Program		
— Thomas E Doyle	Dec	93
Four Easy Steps in Wire-Wrapping	Mar	76
I/O port for SCMP10	Jan	86
Microbiology — Les Bell — 6800 part 2	Jan	84
Microbiology — Les Bell — Internal Operation		
of a Microprocessor	Mar	74
Microbiology — the 8080 Instruction Set	June	84
Morrow's Front Panel — Super CPU forms		
heart of system — Kevin Barnes	Aug	102
Personal Computing — The Early Years	July	92
Product Report IMSAI 8080	Feb	64
SCMP10 Review	Jan	91
Space War Game — Kevin Barnes		
— Scelbi Galaxy Game	May	79
Texas Instruments Programmable TI 59		
— Les Bell	Nov	81
The D2 by Motorola — Your Personal Computer?	Apr	84

The New Heathkit Computer	Sept	100
The S100 BUS — Kevin Barnes	Sept	95
Video Terminal — ETI 632	Jan	95
Video Terminal — ETI 632	Feb	69

ELECTRONIC TECHNIQUES

TITLE	DATE	PAGE
Active Filter Cookbook — Tim Orr	Oct	53
CMOS — A practical Guide — part 6	Jan	73
Care & Feeding of RF Power Transistors		
— Roger Harrison & Phil Wait	Nov	30
Data Sheets Explained — Brian Dance	July	69
555 Timer Applications — R M Marston — part 1	Apr	30
555 Timer Applications — R M Marston — part 2	May	20
555 Timer Applications — R M Marston — part 3	June	45
555 Timer Applications — R M Marston — part 4	July	82
Four Easy Steps in Wire-Wrapping	Mar	76
Liquid Crystal Displays — Robin Moorshead	Sept	15
More on VCT — Ron Harris	Aug	40
Printed Circuit Boards — Design and Production	Dec	58
Scotchcal — What it is, where to use it, how		
to use it	Sept	52
Simple Analogue to Digital Conversion		
— A digital Thermometer — Stephen Collocott		
— Uni of NSW	Apr	62
Solid State Keying for Electronic Organs		
— Nick Labordus	Oct	30
The 741 Cookbook	Aug	49
VCT an Invention that will change the face of		
electronics — Ron Harris talks to Professor		
Gosling of Bath Uni	Jan	30

GENERAL

TITLE	DATE	PAGE
A Look Inside Star Wars — Jim Perry	Dec	30
Batteries	Nov	38
CB in Australia Yes or No?	Jan	17
CB Synthesizers	Sept	107
Electronics in the Year 2000 — part 3		
— Peter Sydenham	Feb	35
Electronics in the Year 2000 — part 4		
— Peter Sydenham	June	73
Electronics Training in the Air Force		
— Steve Braidwood — RAAF School of Radio	May	14
How to tune up your Colour TV		
— T L O'Connor	Feb	16
Met Research Buoys — CSIRO and Aust		
Bureau of Meteorology	Sept	46
NCRA Seeks Regs Changes	Dec	110
New Look for Communications Satellites		
— Brian Dance — Intelsat V Series	Dec	13
Pine Gap — How Secret?	June	13
Processor-Controlled SSB/AM CB Transceiver	Nov	93
Radioactivity — a History	Nov	13
Recharging Dry Batteries	Nov	45
Remote Control TV Tuner & IF Strip		
— B Lewis & T Hobbs (Uni of Adelaide)	Mar	27
Repeaters for UHF CB	Oct	100
SSB Phasing Rigs — Roger Harrison	Sept	59
Simple PCB Drill — A Lowe	Apr	38
Sinclair Software	Nov	120
TV Shopping — James Gold	Dec	21
The CQ-110E Amateur HF Transceiver		
— Roger Harrison	July	62
The Danger of Lightning — Prof W R Lee,		
Department of Occupational Health,		
Uni of Manchester	Oct	14
The Rock Show — Sound System		
— Howard Page	Apr	17

PRODUCT TESTS

TITLE	DATE	PAGE
Fluke 8020A digital Multimeter	Dec	81
Jands J600S Power Amplifier — Louis A Challis		
& Assoc	Apr	23
Linn Sondek LP12	July	15

Sinclair Cambridge Programmable — Les Bell	July	.24
Texas Instruments Programmable TI 59		
— Les Bell	Nov	.81

DATA SHEETS

TITLE	DATE	PAGE
CA 3140 Operational Amplifier	May	.28
C106, 4A SCR	Jan	.36
C220, 10A SCR	Jan	.40
Data Sheets Explained	July	.69
Decoding	Nov	.70
IC 7106/7107, Intersil — Digital Panel Meter IC	Oct	.67
ICL 8038, Intersil — Waveform Generator/VCO	July	.76
ICM 7205 Stopwatch Chip	July	.78
LED Displays	Sept	.74
LH0091 True RMS to DC Converter	Aug	.88
LM 1830, National — Fluid Detector	Aug	.90
LM 3909, LED Flasher/Oscillator	Apr	.71
MC 14490 Hex Bounce Eliminator	June	.67
MN 3001 Bucket Brigade, Panasonic	Dec	.74
SAK140 Rev Counter IC	Feb	.81
Speed	Nov	.70
Three Terminal Voltage Regulators	June	.68
ZN414, IC Radio	Feb	.84
723, Universal Voltage Regulator	Mar	.38
2102 1k Static RAM	Nov	.65
2107A Dynamic RAM	Nov	.66
2112 256 x 4 Bit Static RAM, Intel	Dec	.76
2708 EPROM	Nov	.68

PROJECTS

NO.	TITLE	DATE	PAGE
ETI 062	Simple AM Tuner	Mar	.61
070	Electronic Tie-Breaker	Jan	.52
081	Tacho	Mar	.66
132	Experimenter's Power Supply	Feb	.45
133	Phase Meter — Dr P C Bury	Apr	.45
134	True RMS Voltmeter	Aug	.70
135	Digital Panel Meter	Oct	.75
243	Bip Beacon — A J Lowe	Apr	.65
244	Alarm Alarm — A J Lowe	Feb	.58
245	White Line Follower	Nov	.50
316	Transistor Assisted Ignition	May	.51
317	Rev Monitor — Counter	July	.43
444	Five Watt Stereo Amplifier	May	.66
450	Bucket Brigade Audio Delay Line	Dec	.40
481	12 Volt 100 Watt Audio Amp — part 1	May	.58
481	High Power PA/Guitar Amp — part 2	June	.60
482	Stereo Amp — part 1	Jan	.56
482	Stereo Amp — part 2	Feb	.53
484	Simple Compressor Expander	July	.32
485	Graphic Equalizer	June	.28
486	Howl-Round Stabilizer	Nov	.56
495	Transmission Line Speakers		
	— R Timmins	Aug	.11
546	GSR Monitor — Barry Wilkinson/Jan Vernon	Mar	.46
547	Telephone Bell Extender	June	.41
548	Photographic Strobe	May	.46
549	Induction Balance Metal Detector	May	.37
581	Dual Power Supply	June	.36
582	House Alarm — part 1	July	.51
582	House Alarm — part 2	Aug	.83
583	Marine Gas Alarm	Aug	.30
585	Ultrasonic Switch	Sept	.83
586	Shutter Speed Timer	Oct	.45
588	Theatrical Lighting Controller — part 1 — Introduction to Techniques	Nov	.75
588	Theatrical Lighting Controller — part 2 — Circuit Details	Dec	.67
589	Digital Temperature Meter	Dec	.50
603	Sequencer	Aug	.77
604	Accentuated Beat Metronome	Sept	.39
631-2	Keyboard Encoder — David Kinny	Apr	.55
632	Video Display Unit — part 1	Jan	.95
632	Video Display Unit — part 2	Feb	.69
632	Video Display Unit — part 3	Mar	.81

633	TV Sync Generator — VDU	Jan	.65
635	Microcomputer Power Supply — S100 (Altair and Imsai)	Sept	.66
712	CB Power Supply	June	.56
713	Add-on FM Tuner — Dr B R Lewis	Sept	.31
715	VHF Power Amplifiers — Roger Harrison and Phil Wait	Nov	.29
804	Selecta-Game	Mar	.54
805	Puzzle of the Drunken Sailor		
	— A J Lowe	Oct	.82
---	Remote Control TV (no circuit board)	Mar	.27

ERRATA & ADDENDA — ARTICLES

'High Voltage, High Current Supply', Dec 76, page 26

It is theoretically possible with the circuit as it stands to achieve secondary breakdown of the series pass element Q2 (MJ413) on slow risetime switch on into full load. In fact one failure has been observed under these conditions. The recommended modification is to parallel Q2 with another MJ413 and insert 4.7Ω 5W balancing resistors separately in each emitter lead. With this combination no failures have been observed under extensive testing with the adverse conditions. We should emphasize that no modification is necessary if fast risetime is desired (i.e., C2 absent), and similarly if switch on into full load is not anticipated.

Modifying TV Receivers for Graphic Display, Dec 76, page 86

Point 1 in the section 'Before You Start' should have advised you to check that the power supply section of your TV set does use an isolating transformer.

November 77, p.42 — 44 — Batteries

The diagram in figure 10 should be swapped with the diagram in figure 12. The captions are correct.

ERRATA & ADDENDA — PROJECTS

ETI 132, Feb 77 — Experimenter's Power Supply

Parts List — Circuit Diagram ETI 132 — RV2 should be 10k not 2k2.

ETI 482, Jan 77 — Stereo Amplifier, page 56

Parts List ETI 482A Jan 77 — 'Q1, 2 BC549' should read 'Q1-Q4 BC549'.

ETI 316, May 77 — Transistor Assisted Ignition — circuit diagram, page 52

The connection between the base and emitter of Q2 is an error in the drawing, and should be deleted.

ETI 582, July 77 — House Alarm, page 51

As the system was being finalised it was seen that SW2 could be simplified to a single pole toggle switch by inverting it. This change was not shown in circuit fig. 1. Trace out the wiring from the overlay, etc., and all will be clear. Note that the circuit will work either way. B6 on SW3 should read B9, B6 beneath B7 fig 2 is also B9.

ETI 585, Sept 77 — Ultrasonic Switch, page 83

Power supply current and voltage specs. for TX and RX have been transposed. Swap them and it makes more sense, ie. Receiver; 10-20 Vac, or 14-25 Vdc; Transmitter; 8-20 Vdc (only).

ETI 805, Oct 77 — Drunken Sailor Puzzle, page 82

On figure 1, the circuit diagram of the Drunken Sailor Puzzle has a short circuit across the battery at the left end of the drawing. This should be ignored.

ETI 631, Dec 76 — ASCII Keyboards, page 47

Since publishing our ASCII encoder project in December 1976 we have changed the values of R30 and R31 to 47k and 10k respectively. This was because Q17 was not saturating sufficiently.

ETI 632, Feb 77 — VDU, page 69

Parts List ETI 632A
IC4 should be 4051
IC5 should be 74123
IC6-7 should be 74LS367

CONTINUED ON PAGE 59

HERE ARE JUST A FEW OF THE NEW ITEMS FROM DICK'S 1979 JUMBO CATALOGUE!

SUPER SOUND CENTRE

YOU ASKED FOR IT — WE GOT IT FOR YOU!

This high quality unit looks and sounds like sets costing \$100's more. Dick Smith's super buying power has kept the price down once again and **YOU REAP THE BENEFIT!**

- Superb stereo reproduction from two 100mm dynamic speakers.
 - Built-in condenser microphone
 - Chrome and normal tape switch
 - Battery level and tuning meter
 - Sensitive AM/FM receiver
 - Fully guaranteed
- Plus many more features usually found only on more expensive sets.



CAT. A-4020

WAS \$149.95 —

NOW \$129.95

FM WIRELESS INTERCOM


Use it in the home, workshop, office, factory — in fact anywhere that has an AC mains supply. No need for complex wiring, as you require more intercoms just buy them and plug-in. To use this system just push the call bar and the other station will emit a beep. Push the talk bar when talking or use the lock position for hands free operation. The volume control also acts as a control for eliminating static and hash sounds. Smartly styled for today's modern consumer.

\$49.50
pair



CAT. F-1010

SOLAR PANEL ON HINGED LID

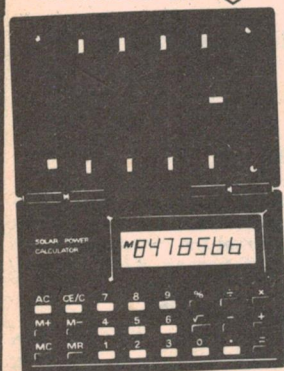

CAT. Q-3050


SOLAR POWER CALCULATOR

The most amazing product we've seen for years — ABSOLUTELY FANTASTIC design makes this a wafer thin calculator **THAT NEVER NEEDS BATTERIES!**

- 8 digit Led Crystal Display plus symbol digit.
- Memory, %, square root plus all normal functions.
- Full floating decimal point
- 10 element solar battery in folding lid.
- CMOS-LSI logic element.
- Brushed aluminium finish outside, matt black inside.
- SUPER THIN — total 8.5mm with lid closed.
- 94mm x 68mm overall
- Works in normal fluorescent light.
- Complete with instruction leaflet.

\$39.95

Prevent tomorrow's loss — TODAY



CAT. L-5060

A complete home, business or factory alarm control module. This unit permits soundless entry and exit for added security and owner convenience. When leaving a protected area you have 20 seconds before the system is armed and on entry you have 10 seconds to turn off the alarm. After alarm triggers it will auto-reset in approximately one minute. 12V DC operation with low drain and low cost maintenance.

\$29.50

THE POWER PACKAGE

How often have you wanted more power from your car stereo but it just isn't available? The answer is simple, just hook up one of the new Dick Smith car stereo sound boosters under your dash somewhere and connect it to your stereo. You will then have 30 watts maximum power for each channel! This unit can be used with virtually any car stereo system on the market and because of its small size



CAT. A-6660


(118(w)x40(h)x165(d)mm) there should be no installation problems. Power source is your normal car battery on a negative ground system. The frequency response of 25Hz to 20,000Hz adequately covers the hearing spectrum. The front panel incorporates a LED to indicate on or off, this also acts as the bypass switch for when you don't require the booster in system.

\$49.95

SOLAR COOKER

IDEAL FOR USE ON FIREBAN DAYS
ASSEMBLES IN MINUTES
NO POLLUTANTS

- Cooks all foods and liquids
 - Normally boils 1 litre of water in 9 minutes
 - Stable stand — tube and cast aluminium
 - Easy-guide sun tracking
 - Weight 6.5kg
 - Every SUNGRIL is guaranteed against manufacturing defects for a period of 1 year from date of sale.
- Use it when camping, caravanning or picnicing — on the beach, in the mountains or your own backyard or balcony.




CAT. X-2001

\$95.00

UNIVERSAL ELECTRICAL TESTER

IDEAL FOR HOME, WORKSHOP OR OFFICE — ANYWHERE BATTERIES, LAMPS AND FUSES ARE USED!

Checks all 1.5V and 9V dry cell, rechargeable NI-CAD 1.2V, watch, photographic and calculator batteries. Also checks miniature lamps and cartridge type fuses for continuity. May be used as a general continuity tester. A 9V battery is required (not supplied) Cat. S-3006 45¢



CAT. Q-1525

\$9.95

GET YOUR JUMBO CATALOGUE

FREE

IN THIS MONTH'S
ELECTRONICS
AUSTRALIA

If you miss out, copies are available for only 75¢ from all Dick Smith stores.



SUPERSPECIAL! 1W ZENERS (4.7 -33V)

How about this; our entire stock of 1 watt zener diodes has been reduced to near half price. Yes, that's right — prime spec, brand new zeners at a bargain price.

NOTE: You can use a 1 watt zener in any circuit that calls for a 400mW type. In fact, it is much more reliable! Buy now and save.

were 75¢ now **40¢**

While they last; 400mW zeners reduced to clear. We're clearing our shelves to make way for 1W zeners, so we must clear out the 400mW types. All voltages from 5.6 to 33V, while they last!

30¢ EA.

SPECIAL FOR MAIL ORDERS ONLY

(Sorry, this item is not available from our stores).



Incredible value. A top quality, brand-name EMI C-30 cassettes at a fraction of the price you'd normally pay! Ideal for tape letters, lectures, music, microprocessor use, etc. etc. ... And look at this price!

75¢ EA.

CAT. C-3030 10 or more 60c each!

VISITING THE EAST?

Dick's new Hong Kong store is **NOW OPEN!** Duty free prices plus **AUSTRALIAN** Guarantees. Send for your **FREE** duty free buyers guide!

20 TRANSISTOR PACK



20 of the most popular hobbyist transistors for less than 13¢ each. BC237/8 (equivalent to BC107/8 etc.) and BC307/558 (PNP equivalents), usable in a fantastic range of projects. See EA Feb (pg48-52) for full details and circuits.

CAT. Z-9012

LESS THAN
13¢ EACH

\$2.50

WATCH THIS SPACE AND FIND OUT WHAT YOU MISSED

Each month all of our stores feature an outstanding special which is actually **BELOW COST!** N.B. Specials are strictly while store stocks last. Don't miss out!

LAST MONTH:

'BIB' ANTI-STATIC
TURNTABLE MAT
WAS **\$7.99** - NOW **\$4.42**
SAVING \$3.57

SIMPLE PROJECTS FROM ETI Volume 2



Incredible range of do-it-yourself projects. Build test gear, auto equipment, etc etc. 98 pages of simple project ideas for you to try.

\$2.95

CAT. B-3655

PARTS FOR NEW KITS

INTERIS LCD EVALUATION KIT (See Feb EA)

As used in the EA digital voltmeter Cat. K-3450 \$39.50

6 DIGIT CLOCK (See Feb EA)

Complete kit, including instructions Cat. K-3495 \$19.75
Case with mounting bracket and bezel Cat. H-3194 \$3.60
AC Mains adaptor Cat. M-9514 \$5.95

PLAYMASTER AM/FM TUNER (See Nov/Dec EA)

Complete kit, including instructions Cat. K-3494 \$159.50

SEPARATE PARTS

Pre-wired and aligned tuner module Cat. F-4610 \$59.00
Set of 4 PC boards Cat. H-8357 \$9.75
Signal strength meter Cat. Q-2100 \$4.95
Tuning meter - centre zero Cat. Q-2095 \$4.95
Most other electronic parts for this project in stock.

MODEL TRAIN CONTROLLER (See Oct EA)

Not produced as a kit - all parts available from stock.

PCB only Cat. H-8355 \$3.75
Zippy box Cat. H-2752 \$3.75
2N3055 transistor Cat. Z-2145 \$0.95
2N3053 transistor Cat. Z-2130 \$0.80

FET INPUT AC-DC VOLTMETER (See Sept EA)

Not produced as a kit - most parts available from stock.

PC board only Cat. H-8353 \$2.75
1mA MRA-65B panel meter Cat. Q-2060 \$12.50
Fabricate your own meter scale using Scotchcal
8005 black Scotchcal photo-sensitive aluminium Cat. H-5694 \$6.00
CA-3140 FET op-amp Cat. Z-5417 \$2.50

VARI WIPER Mk2 (see Sept ETI)

Not produced as a kit - most parts available from stock.

Relay Cat. Z-7125 \$4.80
C106Y1 SCR Cat. Z-4315 \$1.00
2N2646 (DS2646) unijunction Cat. Z-1786 \$1.20

UPGRADED 40/200MHZ FREQUENCY COUNTER (See Aug EA)

Same as previous kit, but new circuitry means it is easier to build, set up and is more sensitive. Basic counter is 40MHz — by adding a single 95H90 IC the range is extended to 200MHz.

Complete kit for 40MHz, including instructions Cat. K-3437 \$99.50
95H90 IC to extend range to 200MHz Cat. Z-5360 \$12.50

SEPARATE PARTS

PC boards (set of two high quality boards) Cat. H-8346 \$8.50
MC-10116 IC (triple differential amplifier) Cat. Z-5415 \$1.95
MM-5369M IC (oscillator - divider) Cat. Z-5781 \$2.50
74C926 IC (4 digit counter) Cat. Z-5414 \$6.50
3.579545MHz crystal Cat. K-6031 \$3.00
LT-303 7 segment display Cat. Z-4103 \$1.50
All other components are normal stock lines at all of our stores.

PHOTO TACHOMETER (See Aug EA)

Although we do not produce a full kit for this project, all parts are normal stock lines.

PCB (only) Cat. H-8352 \$1.80
FPT 100 phototransistor Cat. Z-1950 \$2.00

NEW 10 GAME TV GAME KIT (See July EA)

Complete kit, including instructions Cat. K-3491 \$49.50

SEPARATE PARTS

PCB (only) Cat. H-8344 \$3.95
Fully built RF modulator Cat. K-6040 \$3.00
Fully built audio modulator Cat. K-6042 \$4.50
AY-3-8610 IC Cat. Z-6852 \$15.00

SEND FOR OUR FREE COLOUR KIT CATALOGUE

SHOPS OPEN 9AM to 5.30PM
(Saturday 9AM — 12 noon)
BRISBANE ½ Hour earlier

*ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY

Many lines available from the
Dick Smith Electronics Centres at

GRACE BROS

CHATSWOOD • LIVERPOOL • MIRANDA
• PARRAMATTA • ROSELANDS •



DICK SMITH ELECTRONICS



SYDNEY 125 York Street, SYDNEY. Ph. 290-3377
147 Hume Hwy, CHULLORA. Ph. 642-8922
162 Pacific Hwy, GORE HILL. Ph. 439-5311
30 Grose Street, PARRAMATTA. Ph. 683-1133

MELBOURNE 399 Lonsdale Street, MELBOURNE. Ph. 67-9834
656 Bridge Road, RICHMOND. Ph. 42-1614
BRISBANE 166 Logan Road, BURANDA. Ph. 391-6233
ADELAIDE 203 Wright Street, ADELAIDE. Ph. 212-1962

MAIL ORDERS P.O. Box 747, Crows Nest, N.S.W. 2065. Post and packing extra.

Dealers across Australia.

MAJOR DICK SMITH DEALERS: Listed below are the names and addresses of dealers who stock a large range of our products - however we cannot guarantee that the dealers listed will have all items in stock and at the prices advertised.

Brian Bambach Electronics
Sound Components
Elektron 2000
GM Electronics
Trilogy Elec. Supplies
Crystal TV Rentals Pty Ltd
Lismore Kitronics
Langman's Sound Centre
Sumner Electronics

68 William St, Gosford NSW. Ph 24-7246
78 Brisbane St Tamworth NSW Ph 66-1363
44 Brown Road, Newcastle NSW. Ph 691-222
99 Fitzmaurice St, Wagga NSW. Ph 21-3044
40 Princes Hwy Fairy Meadow NSW Ph 83-1219
66 Crystal St, Broken Hill NSW. Ph 6897
Magellan St & Bruxner Hwy Lismore NSW Ph 878-361
Shop 15, Treasure Island, Coffs Harbour Jetty NSW. Ph 521-570
95 Mitchell Street, Bendigo VIC. Ph 43-1977

Citcom Electronics
ADS Electronics
Advanced Electronics
Aero Electronics
Hutchesson's Comm. Centre
Gawler CB Centre
Altronics
Hocks TV Rentals

Hopkin's Arcade, West St, Mt Isa QLD. Ph 434-791
312 Oxley Ave, Margate QLD. Ph 204-1276
5a The Quadrant, Launceston TAS. Ph 31-7075
123a Bathurst St, Hobart TAS. Ph 34-8232
5 Elizabeth St, Mt Gambier SA. Ph 256-404
51 Hillier Road, Evanston SA. Ph 222-149
105 Stirling St, Perth WA. Ph 328-1599
87 Hannan St, Kalgoorlie WA. Ph 211-906

NOTE: Prices & stock availability could change between publication deadline & on-sale date due to circumstances beyond our control. Please check with our stores for latest availability & prices.

INDEX 1978

AUDIO

TITLE	DATE	PAGE
Audio Amplifiers — Tim Orr	Aug . . .	25
DV505 Dynavector	May . . .	25
GFC Hadcock Pickup Arm	July . . .	13
High Quality Recordings	Oct . . .	21
Neutrik Audio Tracer	June . . .	21
New Recorders for Metafine Tapes	Sept. . .	23
New Technics	May . . .	23
Nightingale NM1	June . . .	19
PLC 590 — Pioneer	July . . .	22
Petanger Parametric Equaliser	Apr . . .	25
Radiometer BKF 10	May . . .	27
Reality — Wally Parsons	Dec . . .	21
SME Series III — a close look — John Gardner	Feb . . .	21
Shure Octave Analyser	Mar . . .	19
Spectrum Planning Plea	Mar . . .	18
Technical Innovation — the Third CES	Aug . . .	14
Telefunken M15A studio tape recorder	Nov . . .	21
The problems of Pirated Recording — Roger Harrison	Mar . . .	27
Transmission Line Speakers	Jan . . .	19
Two Speed Linn	Jan . . .	17
Ultra-Fidelity Amplifiers — design principles — Stan Curtis	Sept. . .	62

COMPONENTS

TITLE	DATE	PAGE
Electrets in Audio — Ian Sinclair	Aug . . .	33
Self-resonance in Capacitors	Mar . . .	80
VCT — J E Morris, Wellington, NZ	Oct . . .	34
VFETS for Everyone — Wally Parsons	Jan . . .	37
VFETS for Everyone	Feb . . .	53

COMPUTERS

TITLE	DATE	PAGE
ACS-8 — John Whitlock	Nov . . .	101
Comprehensive Z-80 Driver for the ETI 640 VDU	Oct . . .	85
Computer Glossary — John Caffrey and Charles J Mosmann	Nov . . .	93
HP System 35	Nov . . .	105
Noting down Music by Computer — P Mars, Aberdeen	Mar . . .	79
16 Bits or Bust?	June . . .	51
Synertek SYM-1	Nov . . .	105
Tandy's TRS-80	May . . .	63
Technico 9900SS — Product Review	Jan . . .	65
The Seattle Computer Products, Inc. — Model 24-101 16K RAM Board	Aug . . .	89
The Thinker Toys Econoram III — Les Bell	Dec . . .	41
Zoonayman — a game for people and computers	Aug . . .	74

DIGITAL ELECTRONICS

TITLE	DATE	PAGE
Digital Electronics by Experiment — Ian Sinclair	Mar . . .	73
" — Part 2	Apr . . .	55
" — Part 3	May . . .	45
" — Part 4	June . . .	78
" — Part 5	July . . .	46
" — Part 6	Aug . . .	94
" — Part 7	Sept. . .	102
" — Part 8	Oct . . .	96
" — Part 9	Nov . . .	86

ELECTRONICS TECHNIQUES

TITLE	DATE	PAGE
Audio Amplifiers — Tim Orr	Aug . . .	25
Designing Oscillators — Tim Orr	June . . .	69
Designing Oscillators — Tim Orr (reprinted)	Dec . . .	13
Electrets in Audio — Ian Sinclair	Aug . . .	33
Fast Fourier Transforms — E J Hughson	Oct . . .	90
One Armed MPU! — John Miller-Kirkpatrick	Feb . . .	81
Op-Amps — Tim Orr	July . . .	62

PCM Explained — Don Rost	Dec . . .	57
Speed Transistor Radio Service — Terry L O'Connor	Aug . . .	71
Ultra-Fidelity Amplifiers — design principles — Stan Curtis	Sept. . .	62
VCT — J E Morris, Wellington, NZ	Oct . . .	34
VFETS for Everyone — Wally Parsons	Jan . . .	37
VFETS for Everyone — Part 2	Feb . . .	53

GENERAL

TITLE	DATE	PAGE
Automotive Electronics for 1978 — K Ludvigsen	Apr . . .	13
Brains and Computers — S McClelland	Dec . . .	31
CB — Where Next?	Jan . . .	72
Catalogue Survey	Nov . . .	42
Chess Goes Electronic	Jan . . .	13
Computer Glossary — John Caffrey and Charles J Mosmann	Nov . . .	93
Deep Space Communications — Brian Dance	July . . .	27
Displays — the state of the art — Ass/Prof Peter Sydenham	Sept. . .	81
European Satellite Communications — Brian Dance	Nov . . .	12
Flying the Space Shuttle	May . . .	12
Further Education in Electronics — S Holliday	Nov . . .	33
Getting into Short Wave Radio — Bob Padula	Oct . . .	50
Inside Information from Ultrasound — Dr P N T Well, Bristol Gen Hosp	Mar . . .	41
It Goes and GEOS — Brian Dance	Oct . . .	14
Nimbus Satellites Monitor the Earth — Brian Dance	Dec . . .	62
OTH-B Radar — In defence of Australia — D J Ball	Feb . . .	35
Pioneer Spacecraft prepares for Venus voyage — Brian Dance	June . . .	11
Propagation — a closer look	Apr . . .	93
Propagation — a closer look — Part 2	May . . .	81
Propagation — a closer look — Part 3 — Roger Harrison	July . . .	112
Robots — Brain Power — Dr Michael Larcombe, Warwick Uni	July . . .	41
Robots — How to Build Your Own — Dr Michael Larcombe and Ass/Prof Peter Sydenham	Aug . . .	40
Robots — the Facts — Ass/Prof Peter Sydenham	July . . .	34
Shortwave Receiving Antennas	June . . .	85
Shuttle Communications — Brian Dance	Sept. . .	14
Spectrum Planning Plea	Mar . . .	18
The Marisat System	Dec . . .	45
The Strange Case of Circinus X-1	May . . .	10
UHF CB Antennas — Roger Harrison	Feb . . .	62
Zoonayman — a Game for People and Computers	Aug . . .	74

PRODUCT TESTS

TITLE	DATE	PAGE
Book Review — Electronics (2nd edition); and Programmable Calculators	Sept. . .	127
Book Review — Master Handbook of Ham Radio Circuits	Aug . . .	126
Chroma-Chime — Review	Apr . . .	97
DV505 Dynavector	May . . .	25
FM320 — Review	Apr . . .	96
GFC Hadcock Pickup Arm	July . . .	13
High Quality Recordings	Oct . . .	21
Microelectronics — Review	Apr . . .	97
Neutrik Audio Tracer	June . . .	21
Nightingale NM1	June . . .	19
PLC 590 — Pioneer	July . . .	22
Petanger Parametric Equaliser	Apr . . .	25
Radiometer BKF 10	May . . .	27
SME Series III — a close look — John Gardner	Feb . . .	21
Shure Octave Analyser	Mar . . .	19
Synertek SYM-1	Nov . . .	105
Tandy's TRS-80	May . . .	63
Technico 9900SS — Product Review	Jan . . .	65
Telefunken M15A studio tape recorder	Nov . . .	21

The Seattle Computer Products, Inc.		
— Model 24-101 16K RAM Board	Aug89
The Thinker Toys Econoram III — Les Bell	Dec41
Two Speed Linn.	Jan17

DATA SHEETS

TITLE	DATE	PAGE
ICL 8063 Power Transistor Drive-Amplifier		
— Intersil	Aug60
ICM 7208 — Intersil	May52
ICM 7555 — Intersil	Nov59
LM 324 — National	Dec78
MCM 6574 — Motorola	Apr40
MM 5837 — Noise Source — National	Feb74
MM 57160 — Standard Timer and Controller		
— National — STAC	Nov60
NLS 4944 — Universal LED — National	Mar67
SN 76477 Sound Effects Generator	Feb72
TL 080 — Family Bifet Op Amps TI	Jan58

PROJECTS

TITLE	DATE	PAGE
071 . . . Tape Noise Limiter	June46
072 . . . Two-Octave Organ	June40
136 . . . Linear-Scale Capacitance Meter	Mar11
137 . . . Audio Oscillator	May35
138 . . . Audio Power Meter	Nov76
139 . . . SWR/Power Meter — Roger Harrison and Phil Wait.	May75
140 . . . 1 GHz Frequency Meter — Timer		
— Part 1 — Circuit Details	Mar85
140 . . . 1 GHz Frequency Meter — Timer		
— Part 2 — Construction	Apr77
246 . . . Rain Alarm	Apr69
248 . . . Simple 12V to 22V Converter	July94
318 . . . Digital Car Tacho	July51
319 . . . Vari Wiper Mk2	Sept. . .	.40
483 . . . Sound Level Meter	Feb28
487 . . . Audio Spectrum Analyser (Scope display)	Feb12
489 . . . Audio Spectrum Analyser 2 (LED display)	Apr62
490 . . . Audio Compressor	Dec81
550 . . . Digital Dial	Aug66
551 . . . Light Chaser	Sept. . .	.47
552 . . . LED Pendant	Sept. . .	.33
553 . . . Tape Slide Synchronizer	Oct59
555 . . . Light Activated Tacho	Nov70
556 . . . Wind Meter	Dec66
587 . . . UFO Detector	May18
588 . . . Theatrical Lighting Controller		
Part 3 — Construction	Jan31
588 . . . Theatrical Lighting Controller		
Part 4 — Final Details	Mar47
590 . . . Digital Stopwatch	Oct74
591 . . . Up/Down Presettable Counter	July56
592 . . . Light Show Controller	Aug51
593 . . . Colour Sequencer	Dec89
605 . . . Temperature Stabilizer Log-Exponential Converter	Sept. . .	.54
634 . . . 8080 Educational/Prototyping Interface		
— Dr P F Goldsborough	July105
634 . . . 8080 Education/Prototyping Interface	Aug80
637 . . . CUTS Cassette Interface	Jan25
638 . . . EPROM Programmer — N D Hammond	July85
639 . . . Computerised Musical Doorbell		
— T Long and T Wooler	Mar58
640 . . . S100 VDU	Apr32
640 . . . S100 VDU — David Griffiths		
and Les Bell	May89
640 . . . S100 VDU — David Griffiths	June57
641 . . . S100 Printer	Sept. . .	.89
650 . . . STAC Timer	Nov51
714 . . . VHF Log-Periodic Antenna		
— Roger Harrison	Feb45
714 . . . VHF Log-Periodic Antenna — Part 2		
— Roger Harrison	Mar33
716 . . . VHF Power Amplifiers — Part 2	Jan51
— Part 3	Feb66
717 . . . Crosshatch Generator	May69

718 . . . Short Wave Receiver	Oct42
719 . . . Field Strength-Power Meter	Nov64
806 . . . Skeet	Jan45
810 . . . Stunt Cycle TV Game	June31
811 . . . TV Tank Game	Oct66
812 . . . Wheel of Fortune	Dec73

ERRATA

ETI 716, Jan 78, p. 51 — VHF Power Amplifiers, Part 2

Parts List — 40W Stripline Amp

Cin	680-1000p ceramic
C1, C4	47p metal-clad mica cap
C2, C3	100p metal-clad mica cap
C5, C8	two each 200p metal-clad mica caps
C6	200p metal-clad mica cap
C7	82p metal-clad mica cap
C9	150p metal-clad mica cap
C10	68p metal-clad mica cap
C11	33p metal-clad mica cap
C12	680-1000p button standoff cap
C13, 15, 17	1500p ceramic
C14, 16, 18	1µ 25 or 35 V DC tantalum
R1, R2, R3	15 ohm, ½W resistor
RFC1, 2, 3,	
7, 10	printed inductors, on PC board
RFC4, 5, 6	4.7µH moulded RF choke
RFC8, 9	5 turns, 18 or 20 gauge tinned copper or enamel wire, 6mm i.d., 15mm long
SL1-9	50 ohm stripline
Q1	CTC B3-12
Q2	CTC B12-12
Q3	CTC B40-12

ETI 483, Feb 78, p. 28 — Sound Level Meter

Some nonlinearity occurs in the meter circuit due to the offset current of IC3. It is recommended that this IC be replaced with a CA3140 (same pinout) and C14 be deleted (it is not required with this IC).

ETI 132, Feb 77, p. 45 — Experimenter's Power Supply

A few errors in the 132 Power Supply slipped past us (and all but one of the readers who built it!). In the parts list, ZD1 and ZD2 have been transposed, and RV1 should be 10k. On the overlay diagram, R1 and R2 have somehow been transposed, but they are of the same value, so the operation of the circuit is unaffected.

ETI 136, Mar 78, p. 11 — Linear-Scale Capacitance Meter

In the parts list, R2 is omitted — it should be 120R. On the circuit diagram, R7 should be 1k, R8 should be 10k, and the battery polarity is shown reversed. The orientation of IC2 shown on the component overlay is incorrect — for a 78L12 the flat should face to the right of the drawing, while for a 7812 the flat metal back of the TO-220 pack should face to the left. The markings on the printed circuit board are correct. R7 to R12 and the pilot lamp connect to the point marked '+12V' on the overlay. The common connection to switch S3 should be taken from the point marked 'red terminal' on the overlay.

ETI 581, Jun 77, p. 36 — Dual Power Supply

Some readers have had problems with failure of low powered regulators when using loads connected between the positive and negative outputs. This is caused by one filter capacitor discharging before the other switches-off and the load pulling the output of the regulator into reverse voltage. This can be prevented by adding diodes (1N4001, 1N914, etc.) across the outputs to limit any such voltage to 0.6V.


ETI 319, Sept 78, p. 40 — Vari Wiper Mk 2

An error was made in the circuits of the SCR output version of the vari-wiper. As shown, a wire is connected from the supply line to the self parking contacts on the motor. This wire is not used for wound field coil motors and should be left out of the circuit.

Continued on page 59


LOW COST DIGITAL TAPE TRANSPORT SYSTEMS

NEW ELECTRONIC READ/WRITE TAPE SYSTEM

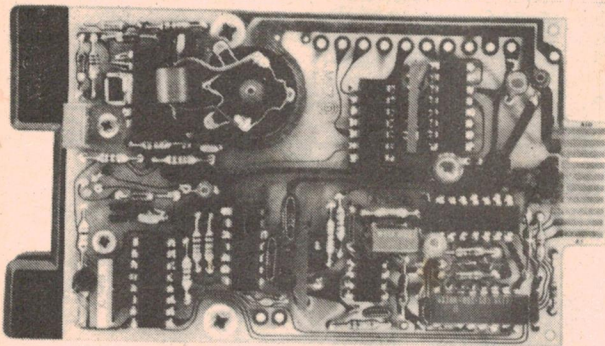

The Micro Read/Write Digital Data Storage System is a complete digital input/output system designed for use in storing and retrieving digital information.

ROMTECH MICROCOMPUTER MODULE 1B




Containing: 1 6800 MPU with 68/75 crystal controlled 1 MHz clock circuit 1 6820 PIA with 16 parallel I/O lines 4 handshake control lines 1 6522 VIA as 6820 but including 2 16 bit programmable timers and serial I/O shift register as well as advanced interrupt control handling facilities 2 6850 ACIA's with independently selectable baud rates utilising 1 COM 5016. One of these serial ports is RS 232C compatible. 2 2114 type static RAM (1K x 8) 1 35391 type static RAM (256 x 8) Sockets for 3K bytes of 2708 type EPROM The bus is Motorola - EXORCiser 1 compatible and fully buffered Romtech Microcomputer Module 1A As above, but instead of the two 6850 ACIA's it contains a further 2 PIA's expanding the parallel I/O capability to 64 lines and 16 control lines. PRICE: Microcomputer Module 1A and 1B \$395 plus tax each Also available 24K static RAM Module \$595 plus tax each Future product releases: Floppy Disk Controller, VDU Controller, etc. All Romtech Modules carry conditional 12 month warranty

mini DIP switches

SPECIFICATIONS

Rating . . . 50V DC 100mA without switching
5V DC 100mA with switching
25V DC 25mA with switching
Contact resistance . . . less than 50m at 2V DC 10mA
Insulation resistance . . . more than 100M at 100V DC
Insulation voltage . . . 500V DC for 1 minute
Electrical life . . . more than 10,000 switching



NEW PS-48C THERMAL PRINTER



With keyboard, PS-48C serves as a full-duplex, bit-serial I/O terminal. The PS-48C is a state-of-the-art interactive printer designed to be used with all popular micro-computer systems. Mostek's F8/3870 singlechip microprocessor makes possible a versatile interface/controller.

For readability, cost effective design, and striking appearance, the DE/200 Series Microprocessor Display



The DE/200 Series Random Access Micro-Displays have been designed expressly for today's microcomputer environments to satisfy the most demanding display requirements. With the 10, 20, 32 or 40 character position Micro-Displays your system messages will be clear and readable even at distances of up to 20 feet (DE/220), under high ambient light conditions. The uniquely attractive Displays utilize low power consumption fluorescent technology. Characters are always uniformly bright and sharp, with no matching or alignment problems.

Quote AEE E.318 on Reader Service Card

Stock

1.000 MHZ
1.8432 MHZ
4.000 MHZ
5.0688 MHZ
8.000 MHZ
12.000 MHZ
32.000 MHC

CRYSTALS



Quote AEE E.319 on Reader Service Card

ROMTECH UV EPROM MODULE

* EXORCISER BUS compatible: * Configuration 16K (2708), 32K (2516), 64K (2532).

OTHER MODULES TO BE RELEASED:

Romtech 9 Slot Motherboard
Floppy Disc Controller, VDU Controller.
Semiconductors:
Large range of TTL, LSTTL, Linear Interface, Voltage Regulators Power Bridges and 6800 family Microprocessor Chips available at competitive prices.
PROM Programming Facility:
Available at Plant for complete range of Harris Generic Fuse Link PROMS 76XX family and UV erasable PROMS, 2708 etc.
COMING SOON: "ULTIMA II" by ROMTECH
A complete processor system designed for Business, Development of 6800 Software and the Home Enthusiast.
Features:
Honeywell solid state keyboard,
Motorola 9" monitor,
Dual 8" Floppy Discs,
Optional Micro Tape Transports,
48K Static RAM,
BASIC on disc or cassette
Programme development software including trace disassembler and complete debugging software.

ROMTECH PTY. LIMITED

PO Box 446 Campbelltown NSW 2560 Australia
Telephone: 6014511 Telex: AA 27064

Office/factory: STC complex
Moorebank Ave.,
LIVERPOOL

INDEX

1977

CONTINUED FROM PAGE 53

ETI 632, Feb 77 — VDU, page 77, Interconnections

V7-C18 (Not V9-C18)
C2-B4 (not C2-B3)
C3-B3-B25 (not C3-B4-A26)
B15-A22 (not B15-A23)
B21-A23 (not B21-A22)
+5V-C9 (not C8)
OV-C8 (not C7)
-12V-C7
M2-B25

Testing page 74 — Also connect —12V

ETI, 712, June 77 — CB Power Supply, page 58, Parts List
Q2 and Q3 have been transposed, i.e. Q2 is a 2N3055 and Q3 is a BD 140.

1978

CONTINUED FROM PAGE 57

8080 Octal Monitor Program, Dec 77, p.95

A section of code was unfortunately omitted from page 95, between locations 234 and 250 of the second page. It is reproduced here with apologies to the many frustrated programmers who are out there, and thanks to the chap who brought it to our attention.

234-007	RLC	
235-346 003	ANI "3"	MASK OFF ALL BUT 3 BITS
237-366 260	ORI 260	FORM ASCII DIGIT
241-315 362 377	CALL PNT	PRINT FIRST OCTAL DIGIT
244-175	MOV A.L	MOVE L TO ACCUMULATOR
245-017	RRC	ROTATE RIGHT 3 TIMES
246-017	RRC	
247-017	RRC	
250-346 007	ANI "7"	MASK OFF ALL BUT 3 BITS

electronics today

Synergistic

Beer

Drinking

On the second Wednesday of each month, at about 6 p.m., the ETI staff and readers meet at the Bayswater Hotel, in Bayswater Road, Rushcutters Bay, (just up from the Rushcutter Bowl) to discuss electronics (or anything) over a few beers. Why don't you come along?



BOOKS

Just some of the books from the biggest range of radio and electronics books in Australia. If the book you require is not listed below, it can be ordered from us.

NEW — NEW — NEW Latest editions of some of the most popular books on the subject:

World Radio and TV Handbook 1979.....	\$15.95
ARRL Handbook 1979 Edition (available now).....	\$13.95
R.S.G.B. Handbook (new Edition) Volume 1.....	\$21.85
R.S.G.B. Handbook (New Edition) Volume 2.....	\$18.90
Reference Data for Radio Engineers (new Edition) (I.T.T.).....	\$40.50
Radio Handbook — 20th Edition (William Orr).....	\$26.50
An Introduction to Microcomputers — Volume 1 — Basic Concepts (Adam Osborne).....	\$13.50
An Introduction to Microcomputers — Volume 2 — Some Real Microprocessors (Adam Osborne).....	\$19.00
An Introduction to Microcomputers — Volume 3 — Some Real Support Devices (Adam Osborne).....	\$19.00
Accounts Payable and Accounts Receivable (Adam Osborne).....	\$24.40
General Ledger (Adam Osborne).....	\$20.80
Z80 Instruction Handbook (Scelbi).....	\$7.60
M6800 Microprocessor Applications Manual (Motorola).....	\$16.70
6800 Programming for Logic Design (Adam Osborne).....	\$15.85
8080 Programming for Logic Design (Adam Osborne).....	\$12.55
Weather Satellite Handbook.....	\$7.80
VHF Antenna Handbook.....	\$7.80
IC OP-AMP Cookbook (Walter C. Jung).....	\$17.50
TTL Cookbook (Lancaster).....	\$12.95
TV Typewriter Cookbook (Lancaster).....	\$14.20
CMOS Cookbook (Lancaster) 1st Edition 1977.....	\$14.25
Active Filter Cookbook (Lancaster).....	\$20.25
IC Timer Cookbook (Jung).....	\$14.00
The Cheap Video Cookbook (Lancaster).....	\$7.95
Transistor Specifications Manual — 8th Edition.....	\$9.90
Australian Electrical Wiring Theory and Practice (Pethebridge & Williams).....	\$11.45
Electronic Components and Materials (Philips).....	\$3.95

American Radio Relay League Publications:

Hints and Kinks for the Radio Amateur.....	\$7.20
The Radio Amateur's VHF Manual.....	\$7.20
A.R.R.L. Antenna Handbook.....	\$8.80
Understanding Amateur Radio.....	\$8.80
The Radio Amateur's License Manual.....	\$6.20
A Course in Radio Fundamentals.....	\$7.20
Specialized Communications Techniques for the Radio Amateur.....	\$7.20
FM & Repeater for the Radio Amateur.....	\$7.20
Single Sideband for the Radio Amateur.....	\$7.20
Ham Radio Operating Guide.....	\$7.20
Electronics Data Book.....	\$7.20
Solid State Design for the Radio Amateur.....	\$12.80
Learning to Work with Integrated Circuits.....	\$4.00
Getting to Know Oscar from the Ground Up.....	\$6.20

Microcomputers/Microprocessors Books:

Microcomputers/Microprocessing: Hardware, Software and Application (Hilburn & Julich).....	\$26.50
Microcomputer Primer (Waite & Pardoll).....	\$10.75
How to Buy and Use Minicomputers and Microcomputers (W. Barden, Jr.).....	\$13.50
How to Program Microcomputers (W. Barden, Jr.).....	\$11.95
The 8080A Bugbook — Microcomputer Interfacing and Programming (Sams publication).....	\$14.25
Beginner's Guide to Microprocessors (Charles M. Gilmore).....	\$7.95
Getting Acquainted with Microcomputers (Lou Frenzel).....	\$11.95
Understanding Microcomputers and Small Computer Systems (Scelbi publication).....	\$15.40
The Scelbi Byte Primer (Ed. Wadsworth & Helmers).....	\$16.80

Howard W. Sams Publications:

Transistor Fundamentals — A Programmed Learning Course — Volume 1 — Basic Semiconductor and Circuit Principles (Robert J. Brite).....	\$7.75
Transistor Fundamentals — A Programmed Learning Course — Volume 2 — Basic Transistor Circuits (Charles A. Pike).....	\$7.75
Transistor Fundamentals — A Programmed Learning Course — Volume 3 — Electronic Equipment Circuits (Martin Gersten).....	\$7.75
Transistor Fundamentals — A Programmed Learning Course (Louis Schweitzer & Reginald H. Peniston).....	\$7.75

Other Titles

The ABC Book of Hi-Fi/Audio Projects.....	\$6.95
A Beginner's Guide to Designing and Building Transistor Radios (R.H. Warring).....	\$7.10
111 Digital and Linear IC Projects (Don Tuite).....	\$7.95
Acoustic Techniques for Home and Studio (F. Alton Everest).....	\$9.25
RF & Digital Test Equipment You Can Build (Ed. by Wayne Green).....	\$7.95
Fire & Theft Security Systems — 2nd Edition (Byron Wells).....	\$9.95
Build-it Book of Digital Electronic Timepieces (Robert Haviland).....	\$9.25
Building Hi-Fi Speaker Systems (Philips).....	\$3.95
Color Television Theory (Hutson).....	\$15.40
73 Dipole and Long-wire Antennas (Edward M. Noll).....	\$7.80
73 Vertical, Beam and Triangle Antennas (Edward M. Noll).....	\$7.50
World DX Guide — 1st Edition (Ed. J.M. Frost).....	\$9.95
The Radio Amateur Antenna Handbook (Orr & Cowan).....	\$8.20
VHF Handbook for Radio Amateurs (Brier & Orr).....	\$7.00
The Complete Handbook of Public Address Sound Systems (F. Alton Everest).....	\$11.30
The Handbook of Telephones and Accessories (John Sunier).....	\$14.00
Amateur Radio Techniques — 6th Edition (P. Hawker).....	\$9.35


For mail orders please add: \$1.40 Local \$1.75 Interstate

McGILL'S AUTHORISED NEWSAGENCY PTY. LTD.
187 Elizabeth Street, Melbourne. Phone: 60-1475-6-7
Prices Subject to Alteration

SEMCON MICROCOMPUTERS PTY. LTD.

AUSTRALIAN MANUFACTURERS OF MOTOROLA COMPATIBLE PRODUCTS

CRT-01 VIDEO INTERFACE

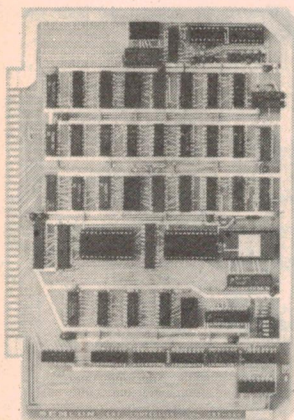

\$285
PLUS TAX

This powerful unit has been designed to efficiently interface the memory of Motorola compatible systems directly to a CRT display. It is software driven and with appropriate program can be made to emulate the majority of functions of currently available intelligent terminals.

- No page buffer — the card has a line buffer that is continuously refreshed from processor memory on a DMA basis; a) Phase 2 when CPU VMA is low, or, b) Phase one. This is completely transparent to the processor resulting in a flicker free display without halting or slowing processor.
- Displays up to 32x2k pages simply by changing contents of 8 bit page register.
- Hardware scrolling controlled by scroll register.
- Displays full 128 ASCII character set. (Control characters optional).
- Inverse video (may be mixed with normal video).
- Coarse graphics.
- Link programmable character/line (48, 64, 80).
- Link programmable lines/page (20, 22, 24).
- Additional line at bottom of page for status information — unaffected by scrolling.
- Dot rate controlled by phase locked loop — automatically adjusts to different formats.


32K STATIC RAM: \$569 KIT

- Motorola Bus compatible
- Low power — 2.5 Amps
- 300ns access
- Fully static operation
- Buffered address, data and control lines
- Power rails in grid network for improved noise immunity
- 4 x 8K blocks — individually addressable — each write protectable — may be removed from address space if not required
- Multi-phase operation — the module allows access during phase one and phase two — ideal for multiprocessing or DMA channels
- Page mode operation — allows system expansion to 1 Megabyte
- Quality PCB with solder resist

	KIT	ASSEM.
32K	\$569	\$599
24K	469	499
16K	359	389
8K	249	275
No Rams	145	—

SEMCON RACKING SYSTEM

- Sturdy aluminium construction
- Blue anodised finish
- Accommodates 8 Motorola Bus compatible cards
- Tin plated backplane with ground plane on one side
- 8 43 x 2 x 0.156" edge connectors




\$143

(\$84 for rack without connectors)

ACIA MODULE CMS 9650


- Motorola Bus
- 8 ACIA's
- RS232 interface on each of the eight channels
- 14 baud rates available

\$255 assembled
\$219 assembled with 2 ACIA's
6850 — \$7.50



PIA MODULE CMS 9620

- Motorola Bus
- Up to 8 PIA's allowing 128 I/O lines
- Occupies 32 sequential addresses allowing efficient interrupt handling
- \$149 without PIA's (price does not include flat ribbon)
- \$179 fully populated
- 6820's — \$7.50




8K/16K EPROM MODULE

- Motorola Bus
- Up to 16 2708's
- Can be initialised for 8K or 16K of address space
- -5V generated on board

\$135

EPROM'S to suit: 1 to 8 \$13.50, 9 to 16 \$12.50



6800 MULTIPROCESSOR MODULE — available soon

- Each module has one 6800 processor with bus contention logic to permit up to 10 modules to play into the one bus, ie, various processors can be dedicated to special tasks for very efficient computing
- 1 Megabyte Addressing — on-board memory management unit permits addressing of 1 Megabyte of system memory
- 2 local busses on card to communicate with additional memory
- 12K ROM using 2516's
- 2516 EPROM Programmer
- 4K Static RAM
- 2 ACIA's with RS232 interface
- 16 Parallel in and 16 Parallel out channels
- Programmable Timer with 3 16-bit counters
- Interrupt controller

(Preliminary data — subject to change without notice)

INTERSIL 7106 EV KIT

This unit has appeared as a project in both EA and ETI. Due to popular demand we are re-ordering a limited quantity. The kit has all the parts to produce a 3½ digit liquid crystal DVM.

\$32.50 plus tax

(Please allow at least 6 weeks delivery)

6800 Bus Wire Wrap Board — **\$45**

2114's 300ns low power — 1-100
\$5.99 ea. SPECIAL (Ends 5.5.79)

7205 Stopwatch IC — **\$15**

74LS374 octal latch — **\$1.85**

81LS95 octal latch — **\$2.10**

555 Timer — **25c**

8T26 — **\$2.20**

7107 3½ digit DVM chip — **\$15**

128 AC11 C.G. with on-chip shift register **\$15**

2102 LF 1K x 1 RAM's — **\$1.35**

Monsanto Rectangular LED's **50c ea**

Z-80 4MHz CPU — **\$19.50**

8080 — **\$9.50**

SEMCON MICROCOMPUTERS PO Box 61, Pennant Hills, 2120. Tel (02) 848-0800

Add 15 percent S/T if applicable. Postage: \$1.50. Fragile & goods over \$100 sent courier on freight collect basis.

A look at the Exidy Sorcerer

Dick Smith is now selling the Exidy Sorcerer personal computer. How good is it? Phil Cohen has the answers . . .

THE SORCERER is a Z-80 based multi-language system. It comes as a moulded plastic case containing CPU, RAM, monitor, keyboard and modems for TV and tape recorder. The price is somewhere around \$850. A socket on the side of the case allows the insertion of 8K of ROM in a cartridge form.

The ROM cartridge looks very much like an 8-track tape cartridge — except that it has an edge-connector at the business end. The sockets at the back, as well as TV and tape inputs and outputs, include an RS232 interface and a parallel interface with handshaking. The whole thing can be carried under one arm (although at its price, I wouldn't recommend it), and looks very smart indeed. The video output produces a rock-steady picture giving 30 lines by 64 characters. The characters set includes upper and lower case alphanumeric and full graphics set including clubs, diamonds, hearts and spades! There are three shift keys:

SHIFT produces the upper case alphabet;

GRAPHIC produces the full graphics set; and

CONTROL produces ASCII control characters such as form feed, carriage return and bell. Pressing SHIFT and GRAPHIC together gives the user-defined character set stored in RAM. This can be altered from BASIC or machine code to give a set of 64 8 x 8 dot matrix characters. It is also possible to re-define the graphics characters in the same way, giving 128 possibilities.

There are two RESET keys — as a safety feature. Only pressing both at once has any effect. It's little tricks like this that make a machine a pleasure to use. There's also a REPEAT key. Normally, a REPEAT key has to be pressed while pressing the character to be repeated. This one's different — when pressed, it repeats the last character to be input; this saves the trouble of pressing SHIFT, GRAPHIC, a letter and REPEAT all at the same time.

Back to BASICS

The BASIC comes in 8K of ROM — this may not seem like all that much, but it's Z-80 code, remember!

With the BASIC ROM cartridge plugged in, pressing RESET will give the impressive message:

```
31976 BYTES FREE.
```

This is the amount of space available for storing programs, variables or whatever. This is enough for a floating-point array with just under 7 000 elements!

The version of BASIC is similar to that found in the Commodore PET — not surprising since both BASIC's were written by the same software company. The Sorcerer uses

standard BASIC line-replacement editing with a colon separating statements on the same line. One thing we found out early on, though, is that the Sorcerer does not like long lines. On occasion we have managed to 'crash' the system completely, requiring reset to get any response. This can be achieved by INPUTting a string longer than one line. When writing a line of a program, the Sorcerer will accept up to two lines of text but will ignore the second line! Although this seems like a major bug, it should be borne in mind that the Sorcerer's lines are 64 characters long and so most programs will not cause any problems.

The system supports the usual commands, such as LIST, RUN, CSAVE, CLOAD (with file names), CONT and NEW. In addition, it also enables the saving and reloading of numeric array files from cassette. Another command allows the user to set the number of nulls which are sent to an output device following a carriage return (e.g. to allow a printer head time to return).

Variables

The variable types are: floating point, string and array. There are no integer variables! Presumably, with 32K of memory to play with, the designers decided that most users wouldn't need the saving possible by using integers rather than floating point numbers for large arrays. The arrays can be of up to 12 dimensions (in theory, there's no limit — but with a floating point array with each dimension's subscript range equal to 2, 12 dimensions gives 4096 elements).

The string variables can hold up to 255 elements each and the floating point range is 6 significant figures with a range of 1.70141E38 to 2.93874E-39. The six significant figure limit does not, however, apply to arithmetic:

```
10 A = 111111111111
20 B = 1000000000000
30 PRINT A
40 A=A-B
50 B=B/10
60 GOTO 30
RUN
1.11111 E + 11
1.11111 E + 10
1.11112 E + 09
1.11121 E + 08
etc.
```

The results of the above run show that the actual arithmetic accuracy is 7 significant digits. The fact that the 'noise' digit is a 2 rather than a zero leads us to suspect that the storage is in a binary representation of some sort, rather than BCD.



Centaur Industries

"THE S100 SPECIALISTS"

PO Box 37243, Winnellie, N.T. 5789.
29 Meigs Cr. Stuart Park. Ph (089) 81-2505

SEATTLE COMPUTER PRODUCTS, INC.

**CLEARANCE
SALE**

S-100 static RAM. Top quality assembled and tested boards backed by a full year's warranty — will work in any known S-100 system: no clocks, no refresh, no problems with DMA peripherals, no "hidden gotchas"!


16k-250 ns\$375 16k-450 ns.....\$325

GUARANTEED FOR ONE FULL YEAR

S.D. SYSTEMS

Top quality S-100 kits at unbeatable prices (also available assembled and tested). All boards feature sockets for all ICs, and first quality plated-through PCBs.

Z80 STARTER KIT



The ideal choice for the beginner, this is a complete Z80 system on a board. Includes 1k static RAM with sockets for another 1k, powerful 2k ZBUG monitor, extra PROM socket PLUS on-board PROM programmer. There's also a Kansas City standard cassette interface, hex keyboard and six digit display, twelve command keys, four counter/timer channels, two eight-bit parallel I/O ports, and room for you to expand: a generous 2½" x 8" wire-wrap area for custom circuitry AND S-100 INTERFACE WITH POSITIONS FOR TWO S-100 EDGE CONNECTORS ON BOARD.

Comprehensive documentation including full operating and programming guides. Power requirements: +5v at 1A, +25v at 30 ma. (for PROM programming).

ALL THESE FEATURES FOR ONLY\$249
assembled and tested \$399

SBC-100 SINGLE BOARD COMPUTER — much more than just a CPU board, it combines the Z80 CPU with 1k RAM, four PROM sockets for 4k or 8k of ROM storage, fully programmable synchronous/asynchronous serial I/O (RS232 or 20 ma. current loop), parallel input and output ports, 4 counter/timer channels and 4 vectored interrupts.

Replaces 3 or 4 boards in many systems!
PRICES REDUCED: KIT\$239

assembled and tested \$369

VERSAFLOPPY FLOPPY DISC CONTROLLER — Controls both 8" standard and 5" minifloppies. Directly controls Shugart SA-400, SA-800; Persci 70 and 277; MFE 700/750 and CDC 9404/9406. Listings of control software are included in the price.

THE BEST VALUE IN FLOPPY DISC CONTROLLERS\$159
assembled and tested 239

SHUGART FLOPPY DISC DRIVES

SA-400 5" minifloppy\$379 SA-400 cable.....35
SA-800 8" std. floppy575 SA-800 cable.....39

SOFTWARE

CP/M disc operating system — the industry standard, complete with 8080/Z80 assembler and BASIC-E plus editor and utilities, on 5" or 8" floppy disc...\$125

Versafloppy control on 275850
SD Monitor on 271675
Z80 Disc based assembler70

NEW RELEASES:

VDB-8024 VIDEO DISPLAY BOARD — Full 80 x 24 character display, complete cursor control, forward and reverse scroll, blinking, underline, reverse and field protect.

Controlled by a dedicated on-board Z80, it includes keyboard power and signal interface, plus both composite and separate video and sync.

KIT PRICE.....\$319
assembled and tested \$369

S-100 EDGE CONNECTORS — Imsai type, gold plated to suit Starter Kit and our motherboards.....\$6.00

STARTER KIT MEMORY EXPANSION — set of 8 RAM chips and DIP sockets for 1k bytes\$20.00

ZILOG CHIPS AND MANUALS

Z80-CPU.....\$19.95 CPU Tech. manual11.20
Z80A-CPU.....29.95 PIO Tech. manual.....7.50
Z80-PIO.....14.95 CTC Tech. manual.....7.50
Z80-CTC.....14.95 SIO Tech. manual.....12.50
Z80-DMA.....49.95 Assembly prog. manual.....15.00
Z80-SIO.....69.50

Z80B CPU BOARD\$149

assembled and tested \$235

EXPANDOPROM BOARD — Takes either 2708 or 2716 EPROMS for up to 32k. Comes complete with all support chips and sockets etc. (EPROMS not included). KIT PRICE\$99

assembled and tested 189

EXPANDORAM — High density dynamic RAM, compatible with SD Systems Z80 CPU boards and the Versafloppy controller. Designed to work with 8080 and 8085 CPUs as well, these boards come in 32k and 64k models, which can be purchased partly populated for later expansion if needed.

32k model (uses 4115 RAM) 64k model (uses 4116 RAM)

Size	KIT	A&T	Size	KIT	A&T
8k	\$199	\$379	16k	\$499	\$595
16k	299	449	32k	689	849
24k	399	519	48k	869	1099
32k	475	599	64k	1049	1299

MEMTECH CO.

MEMTECH ARITHMETIC PROCESSOR INTERFACE

This unique product brings the number crunching power of the fabulous AM9511 arithmetic processing chip to the S-100 computer user. Full 32 bit floating point multiply in as little as 42 us. — and a full complement of transcendental functions, all far faster than software routines.

Also available is BASIC-M, a modified BASIC-E on CP/M compatible diskette which takes full advantage of the APU performance.

APU interface (without 9511 chip) \$159 APU with 4 MHz 9511\$485
assembled and tested \$179 **assembled and tested \$499**

APU interface with 2 MHz 9511\$385 BASIC-M on 8" CP/M format
assembled and tested \$399 floppy disc\$29

Available soon: modified versions of CP/M compatible FORTRAN and PASCAL compilers

CENTAUR INDUSTRIES

CENTAUR S-100 POWER SUPPLY

Professional quality power supply with rugged, generously rated transformer, top grade filter capacitors (the ones NASA use!), fully fused, transient protected, AC line filter — gives +8v at 22A, ±16v at 3A, AND +28v at 3A for floppy discs and/or PROM programming supplies\$349

(Power supplies shipped freight collect)

STRUCTURED SYSTEMS GROUP — Quality business-oriented software designed for use under the CP/M operating system.

CBASIC — Runs on any 8080 or Z80 system with 20k or more and CP/M. Powerful disc access features — random and sequential files including variable length records. Enhanced control structures (WHILE...WEND, optional ELSE clause and STATEMENT LIST improvements to the IF statement), source library facility, machine language routine linkage, powerful PRINT USING, 14 BCD digit arithmetic for accurate financial calculations, and many more powerful features make this the BASIC for business applications. CBASIC is a compiler, so your programs run faster, use less memory, and are much more secure against software piracy.

ON 8" CP/M FORMAT DISKETTE WITH USER MANUAL\$99.95

QSORT — Runs on any CP/M system. A full disc sort/merge package — easy to use and very flexible.

ON 8" CP/M FORMAT DISKETTE WITH USER MANUAL\$95

NAD — A complete name and address database system with a number of powerful user options. Requires CP/M, 32k and a 132 column printer — it can select records on any field including a user-definable field — print mailing labels — many powerful uses can be easily programmed.

ON 8" CP/M FORMAT DISKETTE WITH USER MANUAL\$79

WAMECO, INC: QMB-12 S-100 MOTHERBOARD — 13 slot motherboard complete with all parts and connectors. Features extensive ground plane and termination of all signal lines, I/O area with 3 regulated voltages.

KIT PRICE.....\$125

assembled and tested \$145

Add 15 percent sales tax where applicable — we pay postage on pre-paid orders — orders accepted pre-paid or COD.

Exidy Sorcerer



The Exidy Sorcerer, pictured on Dick Smith's stand at the recent Melbourne Home Computer Show.

Statements

The Sorcerer supports normal BASIC statements: DATA, DEF, DIM, END, FOR . . . NEXT, GOTO, GOSUB, IF . . . GOTO, IF . . . THEN, IF . . . GOSUB, INPUT, LET (optional), ON . . . GOTO, ON . . . GOSUB, PRINT, PEEK, POKE, RESTORE, READ, REM, RETURN, STOP.

In addition to these it supports:

- WAIT** Stops execution until a particular bit pattern appears at a specified port — very useful for interfacing with miscellaneous mechanical hardware: limit switches and the like.
- OUT, INP** These allow communication via the ports. Double-byte numbers can be sent or received.

Functions

The intrinsic BASIC functions are: ABS, ASC, ATN (arctan), CHR\$, COS, EXP, FRE (amount of memory left), INP, INT, LEFT\$, LEN (of a string), LOG (base e), MID\$, RND (random number-rectangular distribution), POS (cursor position), RIGHT\$, SGN, SIN, SPC (prints spaces), SQR, STR\$, TAB, TAN,USR (user-defined machine code subroutine with one parameter), VAL. The accuracy of these was limited by the 6-digit accuracy of the machine.

```
PRINT 30↑2
900.001
PRINT 2↑13
8192.01
```

The above represent the two worst errors we could find in about 15 mins, however, the computational accuracy in general was adequate.

Error Messages and Software Fragility

The error messages are a little cryptic:

```
?UL ERROR
or SN ERROR IN 20
```

for example, but they are fully explained in the manual. Anyway, which would you rather have — massive error messages or more functions?

Apart from long lines, the system seems quite stable — I 'crashed' it on only two occasions, once by entering too long a line on INPUTting a string and once by trying to get back into BASIC from the monitor while the ROM was removed! On both occasions, pressing the general reset got me out of trouble.

User-Defined Graphics

These can be changed by POKEing from BASIC or from the monitor. Each character requires eight two-byte numbers to define it and these are put into RAM between FE00 and FFFF, depending on which character is to be set. For example, to define the shifted graphic character associated with the "I" key (which happens to reside at the bottom of the user graphics RAM) as the Greek letter Omega (Ω), the memory locations FE00 to FE07 are set to 99, 38, 44, 82, 82, 44, 22 and EE respectively. The bit-patterns of these, when laid out one under the other in sequence, form an Ω (try it, if you don't believe me!). Whenever shifted graphic "I" is used after this has been done, the letter Omega will appear.

The graphics held in RAM can, of course, be stored on tape — so you can have a tape of Greek maths, wargames, or whatever. (By the way, try 3C7EDBE7 FF 42 7E 3C!).

COMPUTER BITS

S-100 HARDWARE & 8080 SOFTWARE — RETAIL PRICE LIST —

(Sales tax in brackets to be added if no certificate given)

Thinker Toys *products*

- 8K Synchrofresh RAM (A&T) **\$149** (\$16.50)
- 16K Static RAM (Kit) **\$299** (\$4.35).
- Disk Jockey Disk I/F (Kit) **\$179** (\$20.55) Assembled **\$213** (\$24.45).
- Discus I 8" Disk System (240v/50 Hz) Assembled **\$995** (\$114.60); Add-on Drives (Incl. power supply) Assembled **\$795** (\$91.50).
- Keyed-up 8080 CPU (Kit) **\$250** (\$28.80).
- Speakeasy I/O (Kit) **\$130** (\$15).
- Wunderbuss 20 slot terminated & shielded Motherboards: Kit with 20 edge connectors **\$154** (\$17.70); with 10 E/C **\$120** (\$13.80); Kit with no edge connectors **\$76** (\$8.70); A&T with 20 E/C **\$199** (\$22.95).

DEALERS THROUGHOUT AUSTRALIA WANTED FOR THE ABOVE PRODUCTS

SOFTWARE FOR DISK SYSTEMS:-

- CP/M by Digital Research **\$100** (\$13.50).
- Microsoft Fortran IV **\$350** (\$47.25).
- Microsoft Disk Basic **\$268** (\$36.18).
- CP/M Users Group Library (per disk) **\$10** (\$1.35)

Processor Technology *systems and software systems*

SOL 20	\$1895 (\$227.55)	16K RA-1	\$429 (\$50.10)
SOL 20/16	\$2095 (\$251.55)	32K RA-1	\$750 (\$87.60)
SOL 20/32	\$2395 (\$287.55)	48K RA-1	\$1095 (\$127.80)
HELIOS II/2	\$3195 (\$404.70)	64K RA-1	\$1350 (\$157.65)
HELIOS II/4	\$5395 (\$683.25)		
SOL SYST. IIIb	\$6295 (\$724.80)		
SOL SYST. IVb	\$8550 (\$984.45)		

ALL ASSEMBLED AND TESTED

SOFTWARE: FOCAL (THE DEC LANGUAGE), BASIC/5, TREK 80, GAMEPAC-1, GAMEPAC-2, CHESS, ASSM, EDIT, DEBUG ON CASSETTE (1200 BAUD), ALL **\$19.50** (\$1.95). EXTENDED BASIC AND ALS-8, EACH **\$45.00** (\$4.50). PILOT (CAI LANGUAGE), **\$24.50** (\$2.40). DISK FORTRAN FOR HELIOS SYSTEMS, **\$96.00** (\$7.95).

ALL AVAILABLE FROM:

AUTOMATION STATHAM

PTY. LTD.

47 Birch St, BANKSTOWN. 2200. Phone: 709-4144. Telex: AA 26770.

Exidy Sorcerer

Monitor

The monitor is 4K (and 4K of Z-80 code is quite a lot!).

The commands are: (Parameters in square brackets are optional)

DUMP n (m)	Displays memory contents from n to m — nice output format.
ENTER n	Allows successive memory locations to be changed, starting with location n.
SAVE name n m (unit)	Saves memory onto tape from n to m and sends output to the specified unit. The output header will contain the name, begin address, block size, file type and GO address.
LOAD (name (unit) (n)	Loads file from specified unit. The start address will be the one in the tape header if n is not specified.
FILES (n)	Lists information in headers coming from unit n.
GO n	Calls a program starting at n.
MOVE n1 n2 (S) n3	This mirrors the Z-80 move instruction. It can either (depending on whether S is included) move information from n1 through n2 to locations beginning at n3, or move n3 locations starting at n1 to locations starting at n2.
TEST n m (C)	Used to test RAM locations from n to m — inclusion of C makes it repeat continuously. This must be very useful for fault-finding in newly-completed units.
PROMPT=n	Changes the monitor prompt to character n.
CREAT	Causes the creation of a 'BATCH' tape. This is a macro of monitor commands on a tape which can be played back and executed a number of times. This must be to enable full RAM and ROM testing automatically at the factory — other uses would include multi-pass compiler overlay and other exotic applications.
LIST	Lists the BATCH commands from a tape as it is played back.
BATCH OVER	Executes commands from a tape. Returns control to the user from BATCH mode. This command would be the last on a BATCH tape.
SET S=n	Sets the delay between each letter output to the display. Used when output is to a slow printer.
SET T=n	n=0 means that the tape interface operates at 1200 baud; n=1 means 300 baud.
SET F=n	Sets file type in tape header store. This is a two-byte number with which the user can label a file in any way he chooses.
SET X=n	GO address in tape header.
SET O=V O=P O=L O=S O=n	Changes output port to video, parallel output, Centronics printer driver, tape or address specified.
SET I=K I=P I=S I=n	Sets input port to keyboard, parallel port, tape r specified address
PP	Jumps to plug in ROM.

A very powerful selection altogether. Exidy hope to bring out a full assembler/editor which, in addition to the above, would

make this an excellent development system.

Cassette Interface —

The baud rate of the interface is software-programmable at 1200 or 300 baud. I subjected it to the acid test — my little portable cassette recorder with auto level control!

We had to hand some tapes which had been recorded at 1200 baud on a good machine — these played without a hitch. However, when we tried to record a program at 1200 baud, the Sorcerer couldn't read it back — due, probably, to the fact that on small cassette recorders the playback circuitry is better than the record side, due to the availability of pre-recorded tapes.

Anyway, when we tried the same thing at 300 baud it worked perfectly (although slower!).

We couldn't get the machine to accept wrong characters without noticing — we tried various tricks like re-recording file headers, fiddling with the plug on the signal cable and even varying the playback speed mechanically — all of these either:

- (a) had no effect, or
- (b) produced an error message.

One rather annoying response, however, was that after aborting an attempt to load a BASIC program, typing LIST caused the same line number (and nothing else!) to be repeated ad infinitum until stopped by interrupt.

The facility for recording arrays of data and replaying them with a single command is nice, if marred by the fact that (as far as we can tell) it cannot be done with string arrays.

Manuals

The two manuals which are provided (one on the BASIC system and one on the system as a whole) are beautifully produced, although they contained the usual Americanisms which jarred occasionally.

One annoying thing was that these were both learning texts — there's no quick-reference hard information manual. The manuals also leave a few things out — the USR () function (which allows entry to a user-defined machine code subroutine) is mentioned, but not how to tell the machine the start address.

The glossary in one of the manuals is worth quoting: "PRINTER — a computer output mechanism that delivers hard copy data". Come back, NASA, all is forgiven!

Accessories

At present, the Sorcerer is available with BASIC only. Exidy hope to bring out other ROM packs including a word processor, an assembler/editor and an APL system. The re-definable graphics will prove useful with the latter, no doubt, as APL uses all manner of little squares, circles, and special symbols.

An S-100 extension will also be available soon from Exidy which will enable the machine to be expanded ad infinitum.

Summary

The Sorcerer is an excellent machine. What makes it different from the other units on the market is that it is designed for the amateur to use, but has full professional facilities. It would be quite happy linked to a mainframe — it even has the full ASCII control character set.


The BASIC is comprehensive and fast and the memory is massive. The best thing about it, though, is its flexibility. Anything which can be made user-accessible is made so. For instance, it is possible to re-define from BASIC, what size the string storage area is to be.

PRINT-OUT

ETI's COMPUTER SECTION

News

Compiled by Les Bell

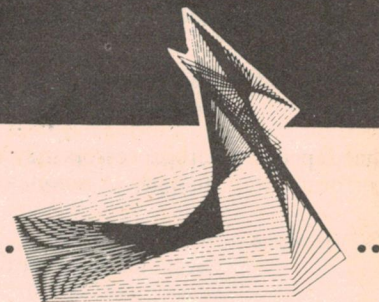

Stop Press!

Owing to a clash of booking dates, the Home Computer Show will now be held at Sydney Town Hall on the 24th - 27th May and not the 17th - 20th May as previously stated.

Word Management System

A new word processing system from Vector Graphic is now available in Australia from A.J. & J.W. Dicker Pty Ltd. The Word Management System Version 2.1 is designed to run on the Vector MZ small computer and is considerably more sophisticated than their earlier Memorite I and II programs.

The program automatically inserts carriage returns at the end of each line on the screen, allowing 'free-format' insertion of text, and tabs may be placed anywhere in a line — they are displayed on a rule on the screen. The system operates with extensive use of prompts, making long commands unnecessary, reducing the risk of errors.

Printing may be done on any length page, and the system will insert headings, footings and page numbers in the desired positions. The printing of super- and sub-scripts is possible, making the package especially attractive for the preparation of engineering and scientific reports. The system can also print names and addresses on letters for mailing list operations.

The package offers many other features — too many to list here. Further information can be obtained from A.J. & J.W. Dicker Pty Ltd., 24 Woodfield Bvde., Caringbah, NSW 2229.

National Panasonic Offers Micro

A new microcomputer, manufactured in Japan by National Panasonic, has been released in Australia by The Computer Company Pty Ltd. Available in four



models, offering several types of floppy disc storage, the model 700 features 160 Kbytes on dual minidisks, the model 800 features 500 Kbytes on full-size floppies, the 850 1Mbyte on double-sided floppies and the 870 has 2 Mbytes on dual double-density floppies.

The processor's main appeal is that it is completely self-contained and is attractively packaged in a robust metal case. Overall construction is superb, the internal circuitry being well supported.

The processor itself is an Intel 8085, the entire computer is built onto a single board, including the disk and CRT controllers. Either 32K or 64K of memory is available in the form of 16K dynamic RAM chips. The floppy disk interface is based on the Western Digital 1771 chip, and the video driver is built around Intel's 8275 CRT controller.



Software? The machine is supplied with a customised version of the CP/M disk operating system and Microsoft BASIC as standard. The use of CP/M means that a variety of other software can be run, such as FORTRAN, COBOL, a BASIC compiler, and programs like Electric Pencil text editor.

Software support is available from the Computer Company, who have also available a variety of programs to suit small businesses. Maintenance of the hardware will be carried out by STC, who are already well established in the business.

The machine has some other interesting features, such as 21 programmable function keys, and the provision of three RS-232C interfaces. Prices start from around \$5000. Further details can be obtained from The Computer Company, 4 Cliff St., Milson's Point, NSW 2061.

67

VECTOR NZ 48K STANDARD

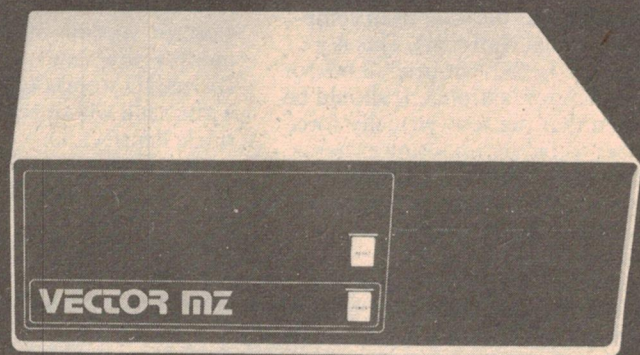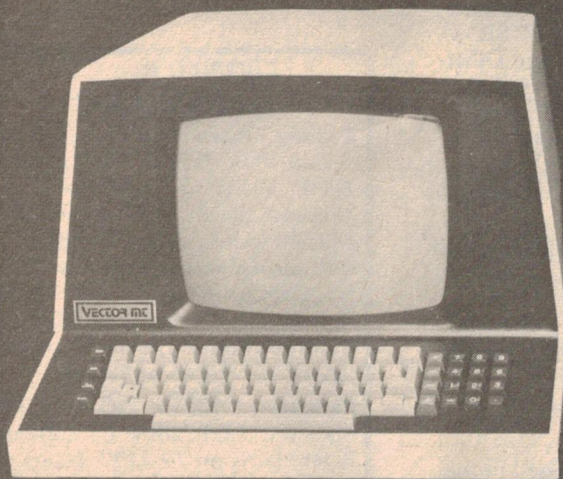

VECTOR GRAPHIC COMPUTER SYSTEM

The VECTOR GRAPHIC Program Development System featuring 49,152 bytes of read/write memory, 630,000 bytes of on line flexible disk storage and 16 x 64 or 24 x 80 memory mapped video terminals is a complete computer system ready to go to work for engineers, programmers and serious end-users. The powerful hardware is supported by a wide range of standard operating system software including, Micropolis disk operating system, 8080 assembler and BASIC interpreter, C/PM disk operating system (including editor, assembler and debugger), C BASIC

compiler basic and ZASM a Z80 assembler to take full advantage of the powerful Z80 instruction set. Also optional are COBOL and FORTRAN languages.

Thus supplied the system is ready to implement development of both high level and assembly language programs. It may be interfaced to a wide range of printers including the Qume incremental daisy wheel printer. Hardware options include a further 2 flexible disk drives expanding total storage to 1,260,000 bytes, and a read only memory Word Processing/text editing module. Delivery is ex-stock.

Dealer enquiries invited



MICROCOMPUTER DIVISION
A.J. & J.W. DICKER PTY. LTD.


VECTOR GRAPHIC inc.
Australian Distributor

24 Woodfied Bvde., Caringbah 2229
5245639

SUPER OFFER!

Electronic Kits
all one price...
\$3.50

These great educational kits at a new low price! Save even more – order five or more and pay only \$3.00 each! Informative. Safe. Hours of fun! Kits come complete with instructions but no batteries.

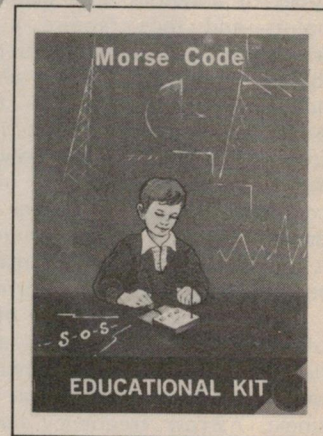

To: **MANNICS AUSTRALIA PTY LTD**
34 Sloane St, Marrickville, N.S.W. 2204
Telephone: (02) 516 4044

Please send me your great Electronic Kits.
I want (less than five) @ \$3.50 each.
I want (5 or more) @ \$3.00 each.

Name _____

Address _____

Postcode _____

I enclose cheque/money order for \$
(Add 50c to the total for postage and packing)

Please tick items required . . .

- | | |
|---|--|
| <input type="checkbox"/> 020A Electronic Organ | <input type="checkbox"/> 020K Morse Code |
| <input type="checkbox"/> 020B Flasher | <input type="checkbox"/> 020L Electronic Siren |
| <input type="checkbox"/> 020C Sound Switch | <input type="checkbox"/> 020M Water Purity Tester |
| <input type="checkbox"/> 020D Touch Switch | <input type="checkbox"/> 020N Radio |
| <input type="checkbox"/> 020E Decision Maker | <input type="checkbox"/> 020O Electronic Metronome |
| <input type="checkbox"/> 020F Sleeping Bell | <input type="checkbox"/> 020P Ammeter Voltmeter |
| <input type="checkbox"/> 020G Magic Touch | <input type="checkbox"/> 020Q Electronic Timer |
| <input type="checkbox"/> 020H Rain Alarm | <input type="checkbox"/> 020R Mosquito Repeller |
| <input type="checkbox"/> 020I Photo Electric Switch | <input type="checkbox"/> 020S Police Car Siren |
| <input type="checkbox"/> 020J Singing Bird | <input type="checkbox"/> 020T Electric Fan |

Dealer enquiries invited.

JM1001

WIDEBAND ANTENNA BALUNS

Few antennas are co-operative when it comes to feedpoint impedance. Matching them up or down to the required 50 ohms (occasionally 75 ohms) often proves awkward. Roger Harrison shows the easy way round.

IN ANY COMMUNICATIONS system the weakest link in the chain is always the antenna system. Even if the best antenna to suit the particular circumstances is chosen, it is necessary to provide efficient transfer of power to or from the antenna feedpoint. However, the antenna feedpoint impedance is not always conveniently the same as that of the feedline, the transmitter output impedance or the receiver input impedance. The latter are usually either 50 or 75 ohms to match the coaxial transmission lines normally employed. Coaxial transmission lines are, by nature unbalanced electrically, whereas many types of antennas have balanced feedpoints and thus require a balanced transmission line. To correct this a 'balun' is necessary — the word being derived from 'balanced — to — unbalanced'. Originally, the term applied to a device which only involved changing from the balanced to unbalanced condition without a change in impedance. Where a change in impedance is necessary the term transformer is, strictly speaking, the correct term.

There are a wide variety of methods of making antenna baluns and impedance matching devices. However, most techniques are suitable for use on a single, narrow frequency band. The most versatile technique, which results in baluns that may be used over a wide frequency range, employs sections of made-up transmission line wound on a ferrite core, usually in the form of a toroid or some other convenient shape. Sections of transmission line are wound together and connected in a series or parallel combination to effect the desired balanced-to-unbalanced transformation and/or an impedance transformation. Winding the transmission line sections on a ferrite core increases the inductance of the length of transmission line used. This article shows how to make the most useful types using locally available components.

High Power Transmitting Baluns

The following baluns to be described all employ toroids and are for use

in transmitting applications at power levels up to 200 W, and up to 1 kW, CW or PEP output. Only two toroids are specified, both from the Neosid range. For applications up to 200 W, the toroid type 4328R/2/F14A/EC is employed, while that for powers up to 1 kW employ the type 4324R/3/F14A. The first has an outside diameter of 25.4mm, an internal diameter of 19.05 mm and a thickness of 9.52 mm. It is coated in an enamel paint. The second, and larger toroid has an outside diameter of 38.1 mm, an inside diameter of 25.4 mm, is 19.05 mm thick and is uncoated. Both have bevelled edges and will not nick or cut the insulation of wire wound around them.

The smaller toroid may be used for purely receiving applications if desired, particularly for the higher transformation ratios of 9:1 and 16:1.

The baluns described are suitable for use from 2 MHz to 30 MHz and in some cases a wider range.


1:1 Balun

The circuit and connections for a 1:1 balun are given in Figure 1. This uses a bifilar winding wound around half the core and a single winding around the other half as illustrated. One wire in the bifilar winding is connected in series with the single winding. This balun is some times described with a trifilar winding but balance and bandwidth are not as good as with the method described.

This type of construction exhibits excellent balance at the Z2 termination and operates over a bandwidth of 1 MHz to 30 MHz in 50 ohm systems for assemblies on either toroid. The bandwidth is considerably better for 75 ohm systems constructed on either toroid, extending to 60 MHz for the 1 kW assembly but only 40 MHz for the 200 W assembly.

The exact gauge of the wire used is not very critical, a latitude of plus or minus one gauge being tolerated. When winding on the heavy gauge wires, a

Fig. 1. 1:1 Balun

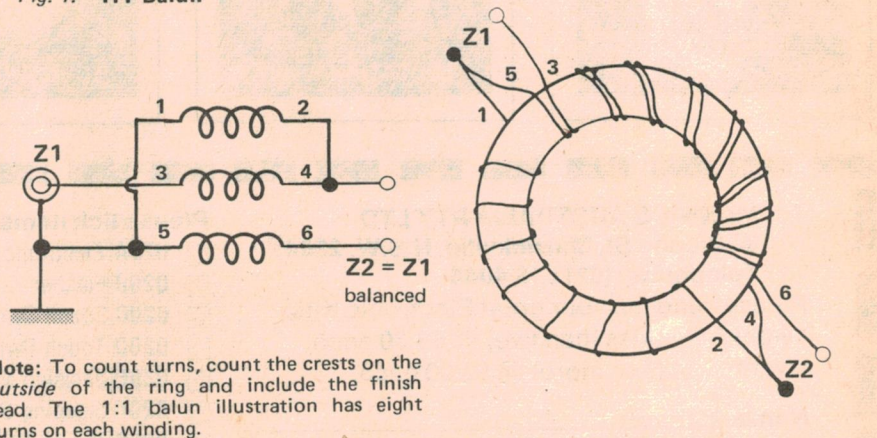

Note: To count turns, count the crests on the outside of the ring and include the finish lead. The 1:1 balun illustration has eight turns on each winding.

	200W	1KW
Winding details:	8 turns, 20 or 22 SWG enamelled wire for both bifilar and single windings.	6 turns, 18 SWG enamelled wire for both windings.
Response		
50 — 50 ohms:	1 — 30 MHz	1 — 30 MHz
75 — 75 ohms:	1 — 40 MHz	1 — 40 MHz

neat winding can be obtained by carefully forming each bend, holding the already wound part firmly against the core.

Some confusion arises when counting turns of a winding on a toroid. To count turns, count the 'crests' on the outside of the ring and include the finish lead. The assembly illustrated in Figure 1 has eight turns on each winding.

4:1 Baluns

An isolated balun has a dc connection between input and output, the isolated type is a true transformer.

Figures 2 and 3 illustrate isolated types. A 4:1 isolating balun is in Fig. 4.

A single bifilar winding is used. The wires may be twisted together lightly or wound together around the core as illustrated. The latter method is preferable. Identify the ends and connect in series as shown. The bifilar winding is spread around most of the circumference. For the larger toroid, it is difficult to spread six turns around the circumference so the winding is distributed around about two-thirds of the circumference of the toroid.

Balance of the high impedance is excellent. Bandwidth for both toroids is best for Z1 of 50 ohms. The 1 kW assembly in this case has the best bandwidth for either 50 or 75 ohm systems.

The same assembly can be connected as an unbalanced transformer. The arrangement is shown in Fig. 3. Bandwidth is limited in this application but most vertical or loaded vertical antenna systems are used on the lower bands, below 15 MHz in any case. Best bandwidth is obtained for transformation from about 19 ohms to 75 ohm systems.


The isolated type is illustrated in Figure 4. This consists of a trifilar winding having two of the wires connected in series for the high impedance winding, the third wire being the low impedance, unbalanced winding.

The 1 kW assembly has the best bandwidth, when matching to 50 ohm systems. However, the full HF range is covered by both assemblies.

9:1 Balun

Baluns providing high impedance ratios are rarely described. Recently, wide-band transformers for use in HF transistor linear power amplifiers, having impedance ratios as high as 36:1, have been described, but the techniques used

Fig. 2. 4:1 Balun

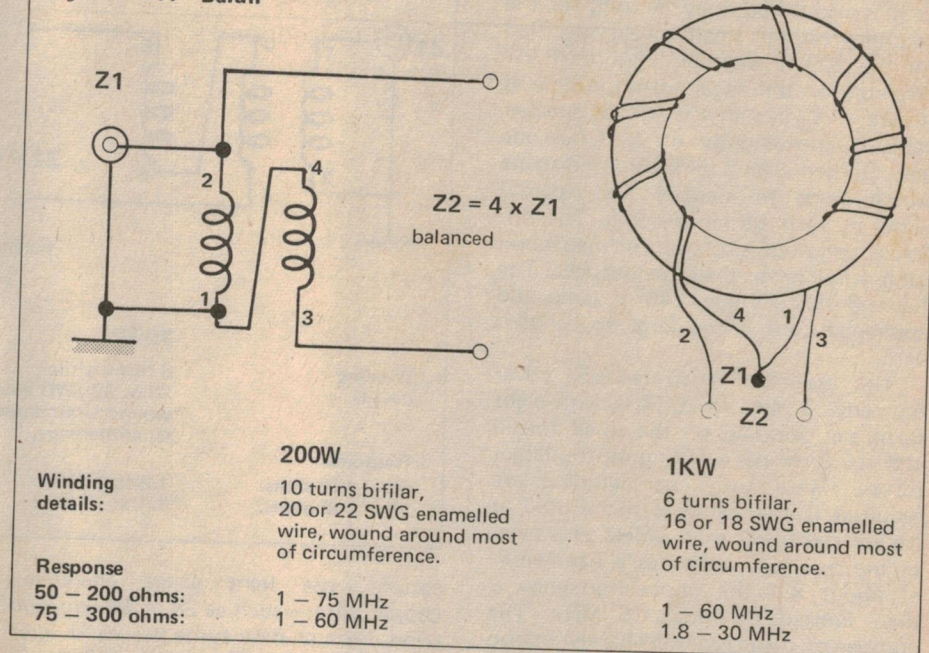

are not generally adaptable to the applications considered here.

Many types of HF beam antennae have high impedance feedpoints, such as the Lazy-H, Sterba curtain, V-beams and Rhombics, therefore presenting a matching problem that is usually solved by using resonant matching devices or 'match-boxes' involving tuned transformers. The wide bandwidth advantage of the V-beam and the Rhombic is compromised by such devices and a wide-band balun provides a much better solution to the problem of matching the balanced, high impedance feedpoint to the unbalanced, low impedance transceiver antenna terminal. You don't have to tune up each time you change bands.

Conversely, you lose the harmonic and spurious suppression advantages of the tuned matching system. However, it is always good practice to insert a low-pass filter in the transmission line immediately following the transceiver, regardless of the matching system used.

For antennas having a feedpoint impedance close to 600 ohms the balun illustrated in Figure 5 is applicable. It consists of three separate bifilar windings wound on the ferrite toroid as shown. One wire from each winding is connected so that each is in series, this forming the balanced high impedance winding. The remaining wires from each winding are all connected in

4:1 Unbalanced transformer

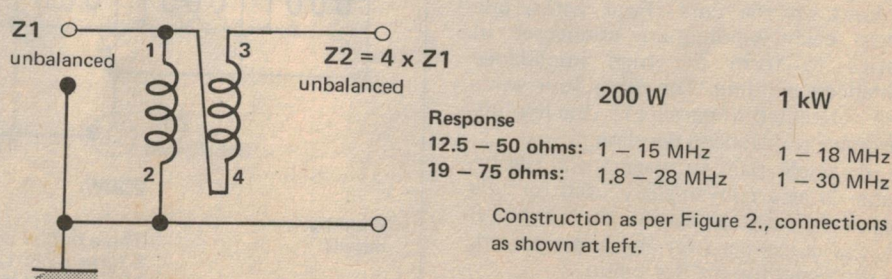


Fig. 3. Circuit for 4:1 unbalanced to unbalanced transformer. Construction is similar to that in Fig. 2. This type of transformer is suitable for matching to low impedance unbalanced antennas.

WIDEBAND ANTENNA BALUNS

parallel for the unbalanced low impedance winding.

A single pair stripped from a length of suitable ribbon cable, or rainbow cable as it is also called, may be used for the windings on the small toroid specified for the 200 W assembly. For the 1 kW assembly on the larger toroid, a type of 'figure - 8' flex that is sold as speaker cable is conveniently used. It has one lead marked with a dark-coloured stripe which helps to identify the separate wires in each bifilar winding. The different coloured insulation of the ribbon cable wires serves the same purpose. The figure-8 flex sold as 240 V lamp and appliance cord is too large to be used here.

The assembly illustrated will cover the range 3 MHz to 25 MHz with eight turns per winding on the small toroid and six turns per winding on the larger toroid. More turns per winding are required if the balun is to be used at frequencies lower than 3 MHz. However, as the assembly only has a bandwidth of about 8:1 the upper frequency is then limited to about 15 MHz. The number of turns required barely fits on each core in this case.

Although the balun described is specified for matching 600 ohms to 75 ohms it can also be used to match antennas having impedances close to 450 or 500 ohms, to 50 ohms. The upper frequency limit is then reduced to about 20 MHz in this case. A slight impedance mismatch is readily tolerated by most equipment and there is little to be gained in trying to get an exact match.


16:1

For antennas having feedpoint impedances in the vicinity of 800 ohms the balun illustrated in Figure 6 is applicable for matching to 50 ohms. It is constructed in a similar manner to the previous one. Four bifilar windings are wound on the core. Four wires, one from each winding are connected in series to form the high impedance balanced winding. The other four wires are connected in parallel for the low impedance unbalanced winding.

A single pair stripped from ribbon cable is also conveniently used for this balun on the small toroid, while figure-8 flex is convenient for the larger toroid, as discussed for the 9:1 balun.

This balun covers 3 to 25 MHz for assemblies wound on either toroid. Sufficient turns will not fit on the smaller toroid if you wish to go below 3 MHz. For purely receiving appli-

Fig. 4. 4:1 Isolating balun

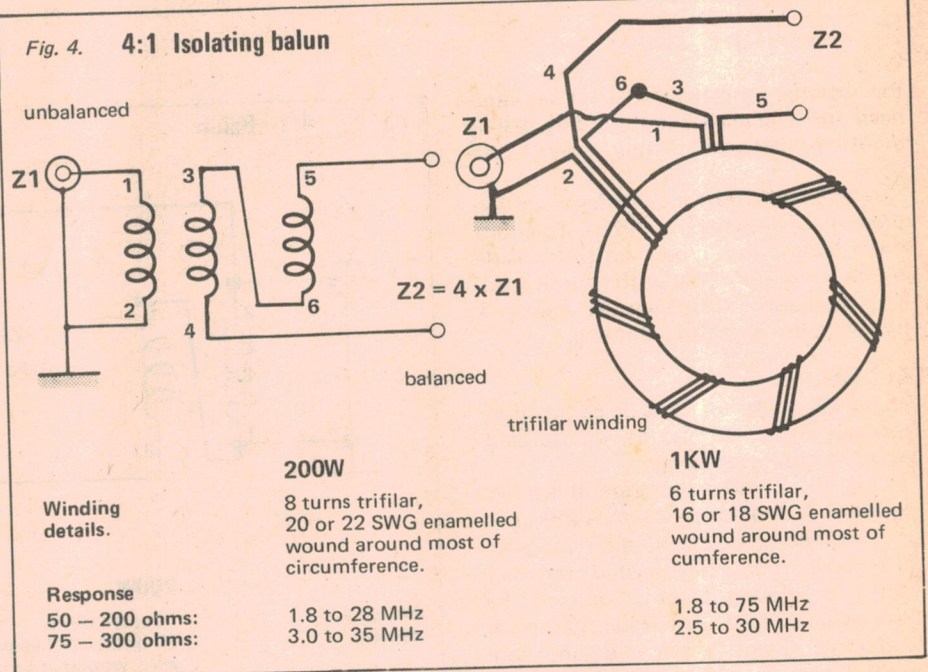

cations, use light gauge enamelled copper wire — such as 28 or 30 swg, and wind eight or nine turns per winding of bifilar pairs on the small toroid. As receivers are usually fairly tolerant of some degree of mismatch, a balun constructed in this manner may be used over the range 1 MHz to about 25 MHz.

The larger toroid will fit sufficient turns to cover the range down to 1.8 MHz but, as for the 9:1 balun, the upper frequency limit is about 15 MHz.

TOROIDS

200W: 4328R/2/F14A/EC


Size: 25.4 mm x 19.05 mm x 9.52 mm (od, id, depth). Suitable up to 200 W and for receiving applications. Also available from DAVID REID Electronics, 104-106 King Street, Newtown (PO Box 317) 2042.

1 kW: 4324R/3/F14A

Size: 38.1 mm x 25.44 mm x 19.05 mm (od, id, depth)

The toroids specified are manufactured by Neosid (Aust.) Pty Ltd, 23-25 Percival St, Lilyfield NSW 2040; phone (02) 660-4566.


Fig. 5. 9:1 Balun

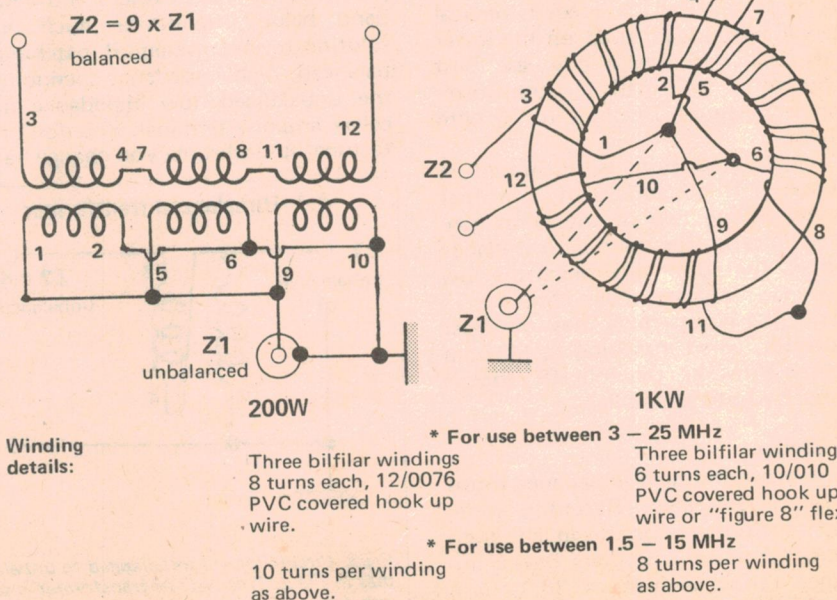

Encapsulating Balun Assemblies

Where necessary, to protect them from the weather, the balun assemblies may need to be encapsulated. A suitable mould may be fashioned from stiff paper or cardboard and the balun assembly potted in a suitable epoxy compound. The input and output terminations may be potted along with them, ensuring that no short circuits are possible in the process. Alternatively, they may be sealed in a suitable plastic moulding such as those produced for 240 V electric cable conduit. These are available as T-junctions etc, and are generally obtainable from hardware stores in sizes suitable to contain the toroids specified. A complete balun and dipole feedpoint termination can be encapsulated in an appropriate fitting. A suitable coax socket and eye-bolts to take the antenna strain are readily included also. The exact construction is left up to the individual to suit the circumstances. A little imagination goes a long way. ●

Fig. 6. 16:1 Balun

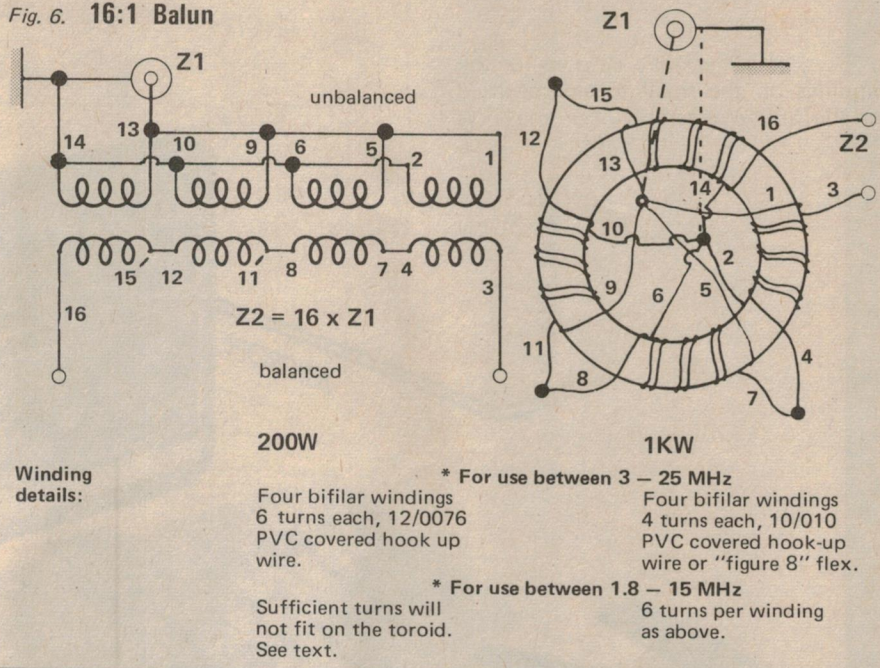

Sydney's First

HOME COMPUTER SHOW

be there!

ADMISSION:
Adults \$2
Children \$1
STUDENTS \$1

LOWER SYDNEY TOWN HALL; MAY 24th to 27th. OPEN DAILY 10am to 6pm (Sat 8pm).

FOR COMPUTER HOBBYISTS, BUSINESSMEN AND EDUCATORS:

- Complete personal and business computers.
- Computer kits.
- Components, sub-assemblies, peripherals.
- Software for home or business etc, etc.

FOR THE GENERAL PUBLIC:

- Programmable and conventional TV games.
- Microprocessor based consumer products and games.
- Home video units.
- Viewdata and teletext decoders.
- The widest range of microprocessor-based gadgets ever assembled under one roof in Sydney!

Full list of exhibitors and lectures next issue.

FREE SEMINARS!


- FOR BEGINNERS ● FOR ENTHUSIASTS
- FOR STUDENTS ● FOR BUSINESSMEN



Presented by:

AUSTRALIAN SEMINAR SERVICES PTY. LTD.

Enquiries: (02) 2-0263.

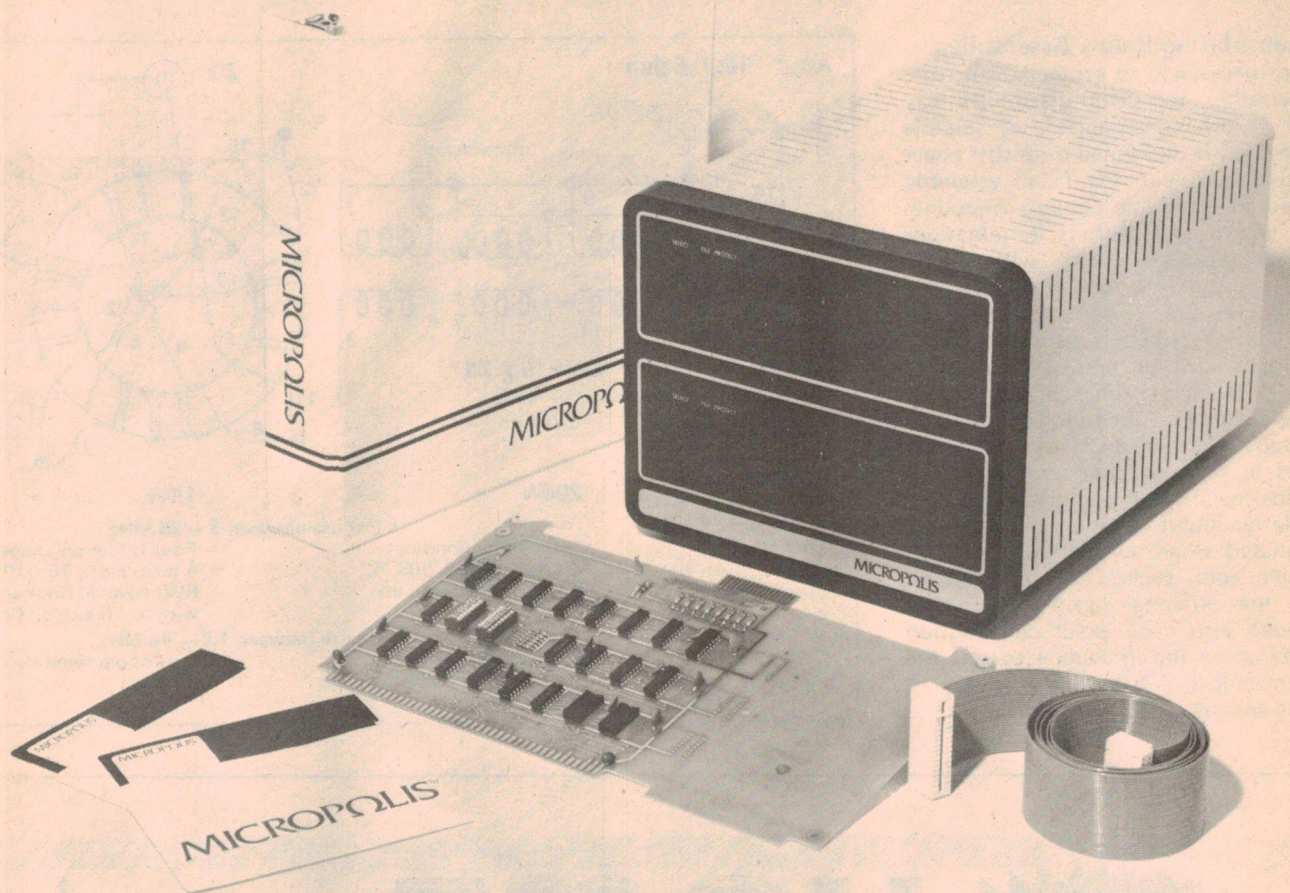

Pictured is a dual drive unit also available.

Micropolis pack 100 percent more capacity into a 5 1/4-inch floppy . . .

Meet The Micropolis MacroFloppy™. From the Greek "macro", meaning "large, great".

The MacroFloppy:1041 and :1042 disk drive subsystems give you up to two times greater storage capacity than ordinary 5 1/4-inch floppy disks. 143K bytes, to be exact. For less money than you'd think possible. Both subsystems, in fact, are the lowest cost approaches to adding the capabilities of a floppy to your S-100 system.

The 70K (or thereabouts) bytes provided by most 5 1/4-inch floppies have never been enough. Especially today, when you need more high-speed random access storage than ever. To help you work with larger data files. And use programs bigger than your computer's memory.

MacroFloppy provides you with that needed extra storage. And so economically.

Two complete subsystems. Ready to go.

Both the MacroFloppy:1041 and :1042 are fully assembled, tested, burned-in, and tested again. For zero start-up pain and long term reliability. They're also backed up by our famous Micropolis factory warranty.

They both come complete with the powerful, field-proven Micropolis extended disk BASIC. And both subsystems allow upward capability of BASIC programs with the high-capacity MetaFloppy™ quad density floppy subsystems.

So you can use the low-cost MacroFloppy for program development, and upgrade later to the high capacity MetaFloppy.

In other words, if your application keeps growing, we've got you covered.

With Micropolis, you get it all. From a single source.

Some suppliers offer only hardware and call that everything. At Micropolis, everything means everything: hardware, software, and documentation.

The MacroFloppy:1041 comes packaged inside a protective enclosure (without power supply). And includes an S-100 controller. Interconnect cable. And 2 diskettes, one of them the Micropolis BASIC, a compatible DOS, assembler and editor. The :1041 is even designed to be used either on your desk top, or to be integrated right into your S-100 chassis. A d.c. voltage regulator kit, 1091-01, is available to convert your S-100 chassis raw supplies to levels suitable for the :1041, at small additional cost.

The MacroFloppy:1042 comes with everything the :1041 has, and more. Such as d.c. regulators, its own line voltage power supply, and to top it off, a striking cover. Making it look right at home just about anywhere.

To complete the package, we even include a comprehensive User's Manual including software descriptions, that tells you just what to do, and how to do it.

Because we know that you need it all.

AVAILABLE FROM:

AMPEC ENGINEERING CO. PTY. LTD.
1 Wellington St, Rozelle, NSW. 2039. Tel: (02) 818-1166.

KITS FOR ETI PROJECTS

WE GET MANY enquiries from readers wanting to know where they can get kits for the projects we publish.

We have only listed the projects published in the last two years, with their dates of publication, so this page can also be used as an index, even though kits are not available for some of them (as far as we know). We will repeat a complete list every 6-12 months depending on space limitations. Any companies not included in this list should phone Jan Collins on 33 4282.

Key To Companies

- A Applied Technology Pty Ltd, 1A Paterson Avenue, Waitara, NSW 2077.
- C J R Components, PO Box 128, Eastwood NSW 2122
- D Dick Smith Electronics P/L, PO Box 747, Crows Nest NSW 2065
- E All Electronic Components, 118 Lonsdale Street, Melbourne Vic 3000
- J Jaycar Pty Ltd, PO Box K39, Haymarket, NSW 2000
- K S M Electronics, 10 Stafford Court, Doncaster East, Vic 3109
- M Mode Electronics, PO Box 365, Mascot NSW 2020
- N Nebula Electronics Pty Ltd, 15 Boundary Street, Rushcutters Bay NSW 2011
- O Orbit Electronics, PO Box 7176, Auckland, New Zealand
- P Pre-Pac Electronics, 718 Parramatta Road, Croydon NSW 2132
- R Rod Irving, PO Box 135, Northcote Vic 3070
- T Townsville Electronic Centre, 281E Charters Towers Road, Rising Sun Arcade, Townsville Qld 4812
- V Silicon Valley, 23 Chandos Street, St Leonards NSW 2065

Project Electronics

- 041.Continuity TesterT, D
- 042.Soil Moisture IndicatorT, D
- 043.Heads or Tails CircuitOct 76 . . .T, D, E, A
- 044.Two Tone Door BellOct 76 . . .T, D, E, O, A
- 045.500 Second TimerT, D, O, A
- 047.Morse Practice SetT, D, O, A
- 048.Buzz BoardT, D, A
- 061.Simple AmplifierOct 76 . . .T, D, O, A
- 062.Simple AM TunerMar 77 . . .D, E
- 063.Electronic BongosD, A
- 064.Simple IntercomNov 76 . . .T, O, A
- 065.Electronic SirenD, O, A
- 066.Temperature AlarmDec 76 . . .T, D, E, A
- 067.Singing Moisture MeterD
- 068.LED Dice CircuitOct 76 . . .T, D, E, A
- 070.Electronic Tie BreakerJan 77
- 071.Tape Noise LimiterJan 78 . . .E
- 072.Two-Octave OrganJun 78 . . .D
- 081.TachometerMar 77 . . .T, E, O
- 082/528Intruder AlarmT, E, A
- 083.Train Controller
- 084.Carl ArmD, A
- 085.Over-rev Alarm
- 086.FM Antenna
- 087.Over-LED
- 088.Hi-Fi Speaker

Test Equipment

- 132.Experimenter's Power SupplyFeb 77 . . .E

- 133.Phase MeterApr 77 . . .E
- 134.True RMS VoltmeterAug 77 . . .E
- 135.Digital Panel MeterOct 77 . . .E
- 136.Linear Scale Capacitance MeterMar 78 . . .E
- 137.Audio OscillatorMay 78 . . .E
- 138.Audio WattmeterNov 78
- 139.SWR/Power MeterMay 78
- 140.1 GHz Frequency Meter-TimerMar 78 . . .C

Simple Projects

- 243.Bip BeaconApr 77
- 244.Alarm AlarmFeb 77
- 245.White Line FollowerNov 77
- 246.Rain AlarmApr 78
- 248.Simple 12V to 22V ConverterJul 78

Motorists' Projects

- 316.Transistor Assisted IgnitionMay 77 . . .K, O, E
- 317.Rev Monitor CounterJul 77 . . .E
- 318.Digital Car TachoJul 78 . . .K, E
- 319.Variwiper MK IISep 78 . . .E

Audio Projects

- 448.Disco MixerNov 76
- 449.Balanced Microphone AmpNov 76 . . .J, E
- 450.Bucket Brigade Audio Delay LineDec 77 . .
- 480.50-100 Watt Amp ModulesDec 76 . . .J, E, D, O, R, A
- 481.12 V 100 Wafit Audio AmpMay 77 . . .E
- 481.High Power PA/ Guitar AmpJun 77 . . .O
- 482.Stereo AmpJan 77 . . .O, E
- 482.Stereo Amp Part 2Feb 77 . . .O, E
- 483.Sound Level MeterFeb 78 . . .E
- 484.Simple Compressor ExpanderJul 77 . . .E
- 485.Graphic EqualizerJul 77 . . .J, E
- 486.Howl-round StabilizerNov 77 . . .J
- 487.Audio Spectrum AnalyserFeb 78 . . .E
- 489.Audio Spectrum Analyser 2Apr 78 . . .J, E
- 495.Transmission Line SpeakersAug 77

Miscellaneous

- 546.GSR MonitorMar 77 . . .E
- 547.Telephone Bell ExtenderJun 77 . . .E
- 548.Photographic StrobeMay 77 . . .E
- 549.Induction Balance Metal DetectorMay 77 . . .E
- 550.Digital DialAug 78 . . .E
- 551.Light ChaserSep 78 . . .E
- 552.LED PendantSep 78
- 553.Tape/Slide SynchroniserOct 78 . . .E
- 581.Dual Power SupplyJan 77 . . .E
- 582.House AlarmJul 77 . . .T, O, E, A
- House Alarm — Installation InstructionsAug 77

- 583.Marine Gas AlarmAug 77 . . .M, E
- 585.Ultrasonic SwitchSep 77 . . .R, O, E, T
- 586.Shutter Speed TimerOct 77 . . .E
- 587.UFO DetectorMay 78
- 588.Theatrical Lighting ControllerNov & Dec 77 . . .N Jan & Mar 78

- 589.Digital Temperature Meter (PCB135)Dec 77 . . .E
- 590.LCD StopwatchOct 78 . . .N
- 591.Up/Down Presettable CounterJul 78 . . .E
- 592.Light Show ControllerAug 78 . . .E

Electronic Music

- 602.Mini OrganAug 76 . . .O, E, D,
- 603.SequencerAug 77
- 604.Accentuated Beat MetronomeSep 77 . . .E
- 605.Temp Stabilized Log-exponential ConverterSep 78

Computer Projects

- 630.Hex DisplayDec 76 . . .E, A
- 631.ASCII KeyboardDec 76 . . .O, E, A
- 631.Keyboard EncoderApr 77 . . .O, E, A
- 632.Video Display UnitJan- . . .O, A Mar 77
- 633.TV Sync GeneratorJan 77 . . .E, A
- 634.8080 Educational/ Prototyping InterfaceJul, Aug 78
- 635.Microcomputer Power SupplySep 77
- 637.Cuts Cassette InterfaceJan 78 . . .V, O, E, A
- 638.Eeprom ProgrammerJul 78 . . .E, A
- 639.Computerised Musical DoorbellMar 78 . . .A
- 640.S100 VDUApr- . . .V, O, A Jun 78
- 641.S100 PrinterSep 78
- 650.STAC TimerNov 78

Radio Projects

- 712.CB Power SupplyJun 77 . . .O, E
- 713.Add-on FM TunerSep 77
- 714.VHF-Log-Periodic AntennaFeb 78 Mar 78
- 715.VHF Power AmplifiersNov 77
- 716.VHF Power AmplifiersJan 78 Feb 78
- 717.Crosshatch GeneratorMay 78 . . .E
- 718.SW RadioOct 78 . . .E
- 719.RF Field Strength IndicatorNov 78

Electronic Games

- 804.SelectagameNov 76 . . .O
- 804.Selectagame (Rifle Project)Mar 77 . . .O
- 805.Puzzle for the Drunken SailorOct 77
- 806.SkeetJan 78
- 810.Stunt Cycle TV GameJun 78 . . .O, D
- 811.TV Tank GameOct 78 . . .O, E, D



A top engineering career. Graduate into a guaranteed job after four years of paid studies.

Taking on a career as an Air Force Engineer Officer is going to give you a lot of opportunities. And a lot of responsibility.

If you're accepted as an Air Force Engineer Cadet, you'll be living at the Engineer Cadet Squadron, RAAF Frognall, Melbourne. And you'll be attending the Royal Melbourne Institute of Technology (RMIT), studying either Mechanical, Electrical, Aeronautical, Chemical or Communications/Electronic Engineering.



After graduation, you'll step straight into a great career. And you'll assume a lot more responsibility as you begin to move through various executive positions.

You may find yourself in charge of maintenance for fighter, bomber, transport and maritime squadrons.

You may find yourself involved in various aircraft project developments — including the investigation of problems and defects and the introduction of modifications and new systems.

Authorised by the Director-General of Recruiting, Dept of Defence.

You may find yourself responsible for flight line maintenance of aircraft electronic systems; ground telecommunication and navigational equipment; engineering planning and management.

And you'll be trained to face all the challenges that may eventuate in your career as an Air Force Engineer Officer.

But right now your first challenge is to get in. And to do that, you'll have to be aged 16 and under 20 on entry; meet our nationality and selection requirements; complete your matriculation with prescribed passes in English, Chemistry, Physics and Maths. We'll give you all the details when you apply, so return the coupon today.

Hurry! Applications close 13th August.

Send to: RAAF Careers Officer, G.P.O. Box XYZ
in your state capital.
Please send me more information on the Air
Force Engineer Cadet Squadron, RAAF Frognall.

NAME _____


ADDRESS _____

POSTCODE _____ BIRTH DATE _____

**Air Force Engineer Officer
RAAF Frognall**

AFE57

AFE.57.FP.39



It's here!

**...at \$995,
the complete
personal
computer**



Dimensions: 16½" wide by 18½" deep. 14" overall height. Weight: 44 lbs.

Commodore PET 2001

MEMORY

Random Access Memory (user Memory): 8K included.
Expandable to 32K bytes externally.

Read Only Memory (operating system resident in the computer): 13K bytes
8K BASIC interpreter
4K — Operating system
1K — Diagnostic routine

VIDEO DISPLAY UNIT

9" enclosed, black and white, high-resolution CRT
1000 character display, arranged 40 columns by 25 lines
8 x 8 dot matrix for characters and continuous graphics
Automatic scrolling from bottom of screen

Winking cursor with full motion control

Reverse field on all characters (White on black or black on white)
64 standard ASCII characters; 64 graphic characters

KEYBOARD

9½" wide x 3" deep; 73 keys
All 64 ASCII characters available without shift. Calculator style numeric key pad
All 64 graphic and reverse field characters accessible from keyboard (with shift)

Screen Control: Clear and erase
Editing: Character insertion and deletion

CASSETTE STORAGE

Fast Commodore designed redundant-recording scheme, assuring reliable data recovery
Cassette drive modified by

Commodore for much higher reliability of recording and record retention

High noise immunity, error detection, and correction
Uses standard audio cassette tapes

Tape files, named

OPERATING SYSTEM

Machine language accessibility
File management in operating system

Cursor control, reverse field, and graphics under simple BASIC control

Cassette file management from BASIC

Pseudo random number Generator

INPUT/OUTPUT

All other I/O supported through IEEE-488 instrument interface which allows for multiple intelligent peripherals

All I/O automatically managed by operating system software
Single character I/O with GET command

Easy screen line-edit capability
Flexible I/O structure allows for BASIC expansion with intelligent peripherals


BASIC INTERPRETER

Expanded 8K BASIC; 20% faster than most other 8K BASICS

Upward expansion from current popular BASIC language
Strings, integers and multiple dimension arrays

10 significant digits; floating point numbers

Direct memory access through PEEK and POKE commands

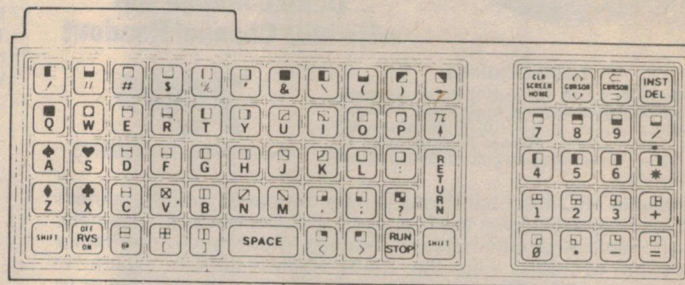

the PET keyboard

The PET keyboard consists of 73 keys. There are the usual alphanumeric (A-Z and 0-9) found on typewriters and calculators and some computers. But the PET has something more: 64 graphic characters. The graphics can be used for plots, for fun and games or for artwork. There are also special screen and keyboard control keys which allow the moving of the cursor in four directions, the reversing of characters and background, the inserting and deleting of characters. Shift keys and a run/stop key are also provided to facilitate keyboard operations. By the use of a POKE command, lower case letters are obtained instead of the graphic symbols above the capital letter keys.

Imported and distributed by:


RADIO PARTS Group

562 Spencer Street, West Melbourne. (03) 329-7888
1103 Dandenong Road, East Malvern (03) 211-8122

COMING SOON!

PET PLUS...

PROFESSIONAL PERIPHERALS: 360K dual drive floppy disk storage system. Tractor feed printer.
TRADE ENQUIRIES WELCOME

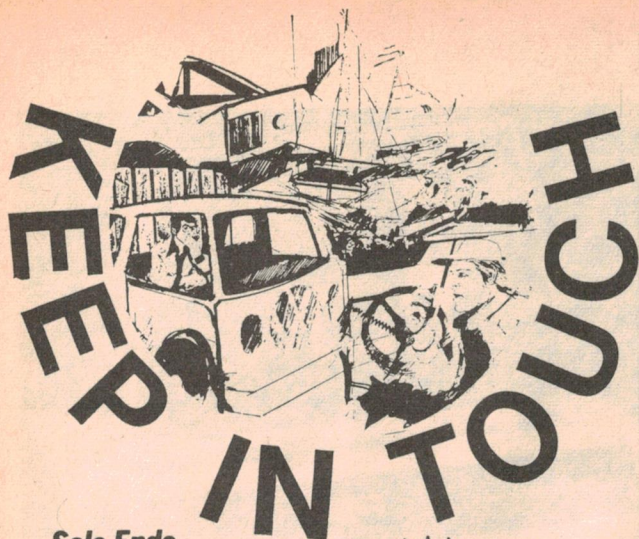

**Sale Ends
28th April, 1979**



**save
\$30**

Deluxe Mobile AM with LED Channel Readout

Specifications

Sensitivity for 10 dB S+N/N: 0.5uV. Adjacent Channel Rejection: 70 dB. Audio Power Output: 4 watts maximum (10% THD). RF Power Output: 4 watts maximum. Power Requirements: 12 VDC positive or negative ground. Size: 5.5x15.8 x22.8cm.

Realistic TRC-469. Feature packed for outstanding performance! PLL synthesizer gives top frequency stability on all 18 channels. Switchable ANL eliminates or reduces interference from faulty ignition systems. Flip the 3-way PA/Monitor/CB switch to "monitor" and it functions as a PA system while continuing to receive CB calls! Comes with plug-in dynamic mike, universal mounting bracket and DC power cables. Suitable for any 12 VDC positive or negative ground vehicle or boat.

21-9469

79⁹⁵

Regular Retail Price 109.95



Regulated CB Power Supply

39⁹⁵ Regular Retail Price 46.95

For all CB's including SSB, 13.8 VDC regulated output at 2.5 amps continuous, 5 amps, surge. 22-9124



Alternator Noise Filter

1⁹⁹ Regular Retail Price 3.95

Stops receiver "whine" produced by alternator. For units with external regulator. 21-507



Mobile Angle Adaptor for Base-Loaded Antennas

3⁹⁵ Regular Retail Price 5.95

For hatchback or other slanted-trunk cars. Mounts between whip and spring, adjusts 180° to keep whip vertical. 21-956



Mobile Antenna Matcher

9⁹⁵ Regular Retail Price 12.95

Reduces SWR. Matches any impedance. 10 to 1000 ohms. 21-924

TANDY ELECTRONICS

CB Radios & Accessories



Budget-Priced Mobile With Noise Blanker and RF Gain Control

Specifications

169⁹⁵

Regular Retail Price 229.95

Sensitivity for 10 dB S+N/N: SSB, 0.5uV; AM, 1.0 uV. Adjacent Channel Selectivity at 10 kHz: 60 dB. Image Rejection: 50 dB. Clarifier Range: ±600 Hz, variable. Audio Output: 4 watts. RF Power Output: 12 watts P.E.P. SSB maximum; 4 watts AM maximum. Power Requirement: 12VDC positive or negative ground. Size: 6.0x20.3x26.0cm.

Realistic TRC-448. Loaded with many boastful features. PLL circuitry, clarifier for fine-tuning SSB reception, dual IF's and a crystal/ceramic filter for superb selectivity. Noise blanker cuts impulse interference. There is a volume/RF gain control, squelch, switch for AM/LSB/USB mode selection, LED channel indicator, and illuminated S/R/F meter. With mobile bracket, push-to-talk mike, DC power cord with inline fuse.

21-9448

Retractable CB/FM/AM Antenna 39⁹⁵

Regular Retail Price 59.95

Flip switch-antenna automatically disappears into fender. Features a centre-loading coil for finest performance, and a splitter to isolate FM/AM signals from CB signals. Adjustable SWR. Overall extended antenna length 86.3cm. With 6.0cm cable and splitter, hardware, instructions. For 12VDC neg. gnd. 21-971

Stainless Steel Body Mount 26⁹⁵

Regular Retail Price 32.95

259 cm stainless steel whip with swivel ball mount, insulator and heavy back-up plate for easy mounting. Shock spring is triple chrome-plated. Overall length, 274.3cm. Lug terminal connections. Less cable. 21-1094

Roof-Mount Antenna 26⁹⁵

Regular Retail Price 32.95

Whip adjusts for lowest SWR and maximum RF output. 3/8" snap-in for easy installation, solderless connections. With 4.8m coax cable and connector. 21-904



Homework on the UHF Band

ASPIRING ADULT students who loath a return to the schoolroom situation they may have experienced as children could have a happy alternative, a Melbourne teacher says.

They could combine correspondence courses with tutorials conducted over UHF CB radio, says Margaret Rivers, an HSC English teacher at Box Hill Technical College.

Mrs Rivers is already using a network on the UHF CB band at the college to coach a group of her off-campus students in their homes around Melbourne on predetermined evenings.

The college is experimenting with a two-way radio "school-of-the-air" concept — one of the first occasions that UHF CB radio has been used for formal education in Australia.

Installing two-way radio at the homes of her eight students was done simply as an added bonus to the off-campus HSC English correspondence courses at Box Hill Technical College.

Mrs Rivers has learned that housewives who feel they have been "out of touch" for too many years welcome the change for further education by "joining" groups without losing the security and comfort of staying at home.

"Women who have been tied to the house for a long time may not have the confidence to go 'back to school'," Mrs Rivers said.

"And both sexes can be put off with the thought of having to front up to a school if it means re-living the terror of unhappy classroom situations experienced when they were young.


"They may feel that they are going to make fools of themselves."

Mrs Rivers said that housewives working part time and men committed to fulltime jobs after perhaps failing their HSC, can find a correspondence course with group discussions done from home an ideal way to improve themselves without actually attending an adult-education course.

Her students age from 19 to 55, and talk to her and some of their fellows from their homes located in Melbourne suburbs at Hawthorn, Glen Iris, East Kew, Noble Park, Ferntree Gully, Eltham and Lilydale.

The idea to use the economical UHF CB radio method came from Graeme Scott, 37, the Education Department training advisor for electronics, with Box Hill College funds.

"The radios work on the new UHF band, on a much higher frequency than

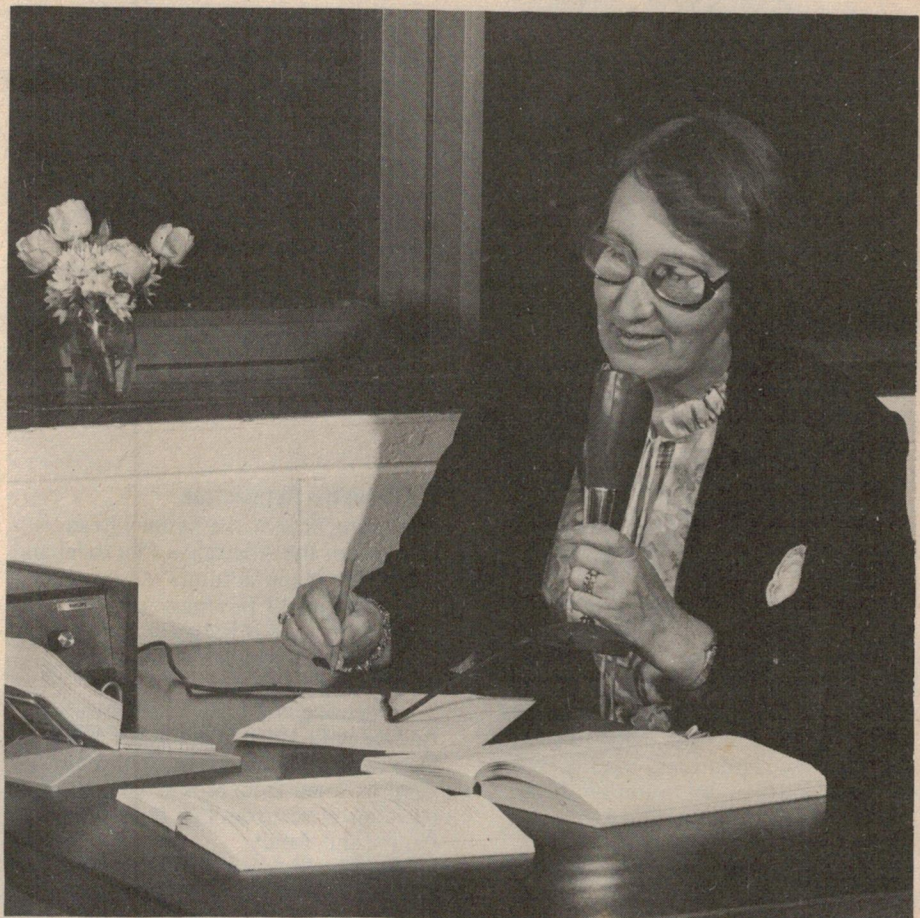

the notoriously clogged channels of the conventional 27 MHz CB band", Mr Scott said.

"The students are not subject to unwelcome intrusions by other stations, by bad language or abuse".

"At the end of some sessions calls coming in have shown that there has been an interested listening audience, people who have been polite not to interrupt the tutorial", Graeme said.

Graeme, an active radio amateur — VK3ZR, is keen to adopt modern technology in education, wants to exploit and enlarge the network next term with more subjects and more sets.

"Our transmission coverage for radio is ideal from Box Hill", said Graeme.

"All we need now is the equipment to get on with the job we already know we can do".

Box Hill Technical College, which is a Technical and Further Educational (TAFE) College, is administered by the Technical Schools Division of the Victorian Education Department.

New RB14 Arrives!

In fact, there's two! RB14 and Son of RB14 . . . known as RB14a.

RB14 is the incomprehensible one with the legal-type words in it and sets out what they give you and what they don't. It is *the word*.

Son of RB14 is a document on "operating guidelines". This one is for the proles. Thee and me . . . and I'm not too sure about . . .

What's the bottom line, the good news and the bad news.

*The five sets per license is definitely a goer.

*Anybody will be allowed to use equipment licensed to you, with your permission — but you're responsible.

*Callsigns are required at intervals no longer than five minutes in any single transmission, license numbers to be given at beginning or end of a series of transmissions.

*Gain antennas will be permitted.

Nothing bigger than a five-eighth groundplane on 27 MHz in the city, three element beam in the country. On UHF you'll be allowed an omni-directional antenna having up to 6.2 dB (over isotropic) in the city, up to 8.2 dB ►

CB News



in the country. A five-element beam will be allowed in the country.

*No height limitations on antennas.

*Power mics are out, other than those sets type-approved having a power mic as standard equipment, e.g.: CPI rigs.

*Current policy "anticipates" 27 MHz operation will cease in 1972.

*23-channel sets will be licensed in future providing proof of prior license is available.

Interestingly, RB14 (big daddy version) does not give official sanction to the emergency channels on HF and UHF (channels 5). Only Son of RB14 gives the nod to the emergency channels.

It is going to be interesting to see how the new regulations, conditions (whatever), affect operation on the air and the performance of the market — currently wallowing in a further doldrum since the Christmas 'pimple' (it was no boom, believe me).

Somehow, the "All-new, singing-dancing, virgin-white, lemon-fresh..." RB14 (together with Son of RB14), while overcoming many of the shortcomings of the first document, has burst upon the CB world "... not with a bang, but a whimper".

It's going to be interesting to see how long it will take the craftier quasi-CB- pirates to find and exploit the loopholes.

South Africa Legalises 27 MHz

South Africa introduced a CB service on 27 MHz during January. CBers there are allowed to use nine channels, transceivers that meet 1976 American FCC standards and antennas no larger than a quarter wavelength long. Our spies estimated there were maybe 10,000 pirates in Johannesburg alone so it seems there was a clear groundswell of enthusiasm for CB. A boom in demand for rigs and equipment is expected, naturally enough. Wonder if any Australian companies will export to South Africa?


CB Industry Association

A meeting held at the Sydney headquarters of the Australian Electrical and Electronic Manufacturers' Association (AEEMA) on 13 February saw the formation of a CB Industry Association... something which has been 14 months in gestation.

A steering committee has been formed with Mike Skovron (of Mike Skovron, Agencies) as the Chairman, Greg Ackman from Mobile One and representatives from Pye Industries, Philips and Tandy.

As Mike Skovron tells it, they'll be addressing themselves to the problems facing the industry from the poor image of CB radio to chaotic marketing and the severe slump that has persisted since mid-1978. They'll be pressing the P & T Minister and his Department over licensing and regulations as well as the question of more channels.


Secretarial support and other services to the embryo Association will be provided by AEEMA.

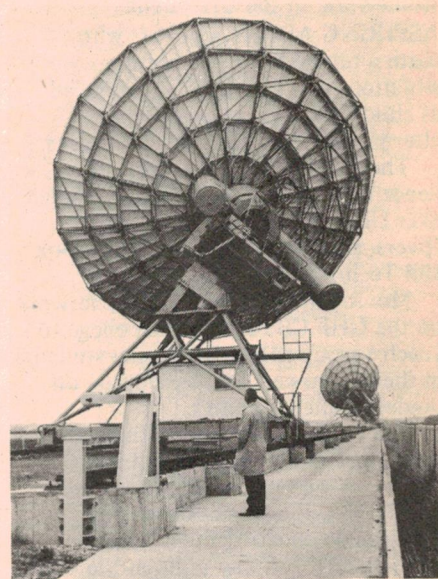

FCC Seek CB Restriction Around Radio Telescopes

The United States Federal Communications Commission launched rule-making proceedings late in October seeking to restrict CB and general mobile radio transmissions in the established "radio quiet" zones around the radio telescope installations in West Virginia at the National Radio Astronomy Observatory at Green Bank and the Naval Research Laboratory's installation at Sugar Grove.


The zones have been established since 1958 and exist to prevent man-made interference to the super-sensitive radio astronomy equipment at the installations. Authorities have said that the large increase in CB and mobile radio use in the area was causing undue interference with the equipment.

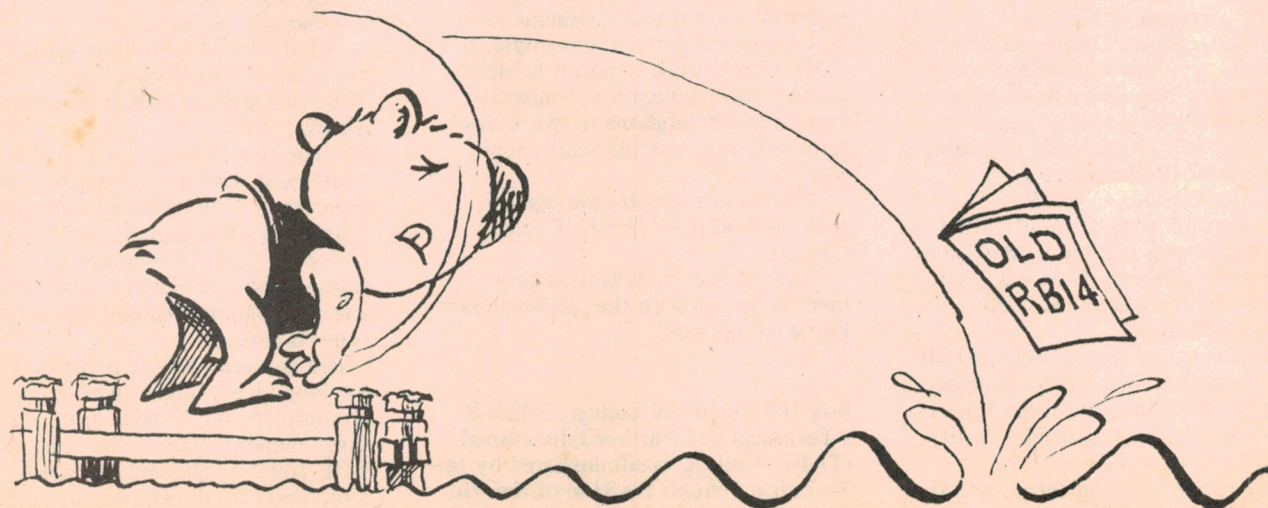

MAD MAL'S
APRIL
MAGNESS!

BEST BUYS

NEW



2 FABULOUS NEW DE-LUXE SPEAKER KITS-WOOD VENEERS

HAND-CRAFTED & FINISHED • CONTOURED FRONT GRILLES
FULLY ASSEMBLED • JUST ADD SPEAKERS OF YOUR CHOICE!
650x480x210 mm

\$49.50

\$65

5" TV TUBE

150CB4 \$5.95

2 FOR \$11 OR

23 WAY 2 SIDED PC EDGE CONNECTORS

1 EA \$1

NT-3102 Eht Trans.

\$6.50

Brand new Philips EHT Transformers

Popular Model



CORAL SPEAKERS

High quality, complete speaker kits, X-overs, mfg screws, wire etc.


- 65A-1 6" 30W 50Hz-20KHz \$52 PK
- 85A-1 8" 35W 70Hz-20KHz \$59 PK
- 85A-5A 8" 35W 50Hz-20KHz \$65 PK
- 105A-1 10" 50W 40Hz-20KHz \$97 PK
- 105A-5A 10" 50W 40Hz-25KHz \$109 PK
- 125A-1 12" 60W 30Hz-20KHz \$133 PK
- 125A-5A 12" 50W 35Hz-20KHz \$139 PK

IF YOU BUY CORAL SPEAKERS WITH ANY OF OUR HUGE RANGE OF CABINET KITS, WE WILL CUT-OUT FRONTS FOR YOU FREE

MUSICOLOUR MKIII COLOUR ORGAN KIT

SAVE \$39.90 OFF OUR NORMAL PRICE OF \$59.90

See E.A. Sept '76



TURNTABLE BASES

in beautiful TEAK! Size 21"x14"x3"

Plenty of room for amplifier

\$3

JUST MADE!

PHILIPS AM RADIO TUNER MODULE UF-411

\$2.50

Speakers

2 1/2" 4W 15N 5" 3.5W 5" 5W 6" 8W

\$1.15

\$1.50

\$1.50

\$1.95

50¢

(12 FOR 50¢) MULTIPLES OF 12

Test Equipment

PRICE ON APPLICATION WHERE NOT LISTED!

ROHDE & SCHWARZ SWEEP SIGNAL GENERATORS - matched pair, one 50KHz -12MHz, the other 5-225MHz, as new.

FLUKE 931PB RMS DIFFERENTIAL VOLTMEETER 0-100mV, 1V, 10V, 100V, 1KV.

FLUKE 332A VOLTAGE STANDARD Sub-Standard DC voltage source.

FLUKE 207-3 VLF RECEIVER/COMPARTOR-all electronic phase-tracking receiver for calibration of local freq. standards and VLF propagation m'tments.

FLUKE 413C HV DC SUPPLY accurate D.C. power supply, 0-3KV.

BECKMAN 9010 FUNCTION GEN. Sine, Square or sawtooth output signal generator 0.1Hz-1MHz.

BECKMAN 9030 FUNCTION GEN. Multi-purpose sine, square or sawtooth output signal generator 0.01Hz-1MHz with variable/manual trigger.

SE LABORATORIES 3006 UV RECORDER-6 channel high speed ultra-violet chart recorder.

KEITHLEY 240A HV SUPPLY-0-1200 volts DC in 1 volt steps at max. 10mA.

DATAPULSE 100 PULSE GENERATOR repetition rates 5Hz-500KHz \$130.

FAIRCHILD 792A PULSE GEN. Range 5KHz-5MHz price \$260.

BLOCKBUSTER VALUES

240v Soldering Iron 30W \$15

FM Antenna kits 6dB signal gain \$5

3 element outdoor beam-easy to assemble

SHARP TV TUNERS-12 CHAN now \$4

DC-DC CAR CONVERTORS 6V/9V \$4

De-Soldering Braid 1.5m long \$2

SPOT HONEYWELL MICROSWITCH \$1

5K 25W Ceramic Base Pots \$2

DE-LUXE MAGNIFIER So you can read \$49.95

1,000V 63W Pigtail Electrocs 65c

3,300 50W Can Electrocs \$1.50

3,300V 75W Cans (were \$4.75) \$3.50

7x3" 3-5A Oval Speaker \$2.50

3" Diam 15A Rola Speakers \$1.50

2 Gang MSP 90/200pf Tuning Cond \$1.50

3 Gang MSP 90/200/200pf Cond \$2

3 Position 2 Pole OAK rotary switch \$1

2 Position 8 Pole OAK rotary switch 75c

2-5M Jack Sockets 20 for \$1

3-5M Jack Plugs 10 for \$1

6-5M Stereo Panel Sockets 3 for \$1

NE-2 Neons 60V Op-er 10 for \$1

GR-111 Nixie Tubes 0-9 ea. \$1

ZM-1000 " " ea. \$1

ZM-1080 " " ea. \$1

3AG Chassis Fuseholders 6 for \$1

9 Volt Battery Snaps 10 for \$1

7 Lug Tagstrips 20 for \$1

20 0-5ins plastic spacers for \$1

240 Volt Neon Bezels 3/8" diam 3 for \$1

Earphone 2-5mm or 3-5mm 5 for \$1

3 Volt DC Buzzers (were \$2.50) now \$1

Ferrite Baluns 5 for \$1

12 Volt DC 170mA Sealed Relays \$1

12 Volt DC 200mA PCB mini-Relays \$1

5-50pf Ceramic Air-spaced Trimmers \$1

5-20pf Ceramic miniature Trimmers \$1

Solder Lugs 60 for \$1

Car Noise Suppressor Res 10 for \$1

3/8" diam x 8" Long Ferrite Rod 3 for \$1

1KA Cermet Preset Pots 5 for \$1

3-UM3 Battery Holders 3 for \$1

50A 2W pot (Tweeter Cont) 2 for \$1

9 Pin Eht Rect. Valve Sockets 3 for \$1

2 uF Non-Pol. spkr. X-Over Cap 2 for \$1

2 Jabel Coil Aligning Tools 2 for \$1

2-20 Volt Bridge Rectifiers 2 for \$1

3-3" Polyester Rect. Tubes 3 for \$1

3-3" Empty Plastic Reels 3 for \$1

Mini Trans. Radio Tuning Gang 5 for \$1

2-BNC Panel Sockets VHF-UHF for \$1

3-UM3 Trans. Mounting Bushes 50 for \$1

50 TO-3 Insulating Bushes 50 for \$1

10 TO-3 Mounting Kits complete for \$1

12 TO-3 Mica Washers only 12 for \$1

5-200uF 50WV Electrocs 3 for \$1

6-1.5uF 35WV Tantalums 6 for \$1

ONLY WHILE STOCKS LAST-BUT NOW!

COMPUTER BOARD SALE

A SPECIAL PACK OF 10 BOARDS WITH APPROX 600 PARTS FOR \$5

LESS THAN 1¢ PER ITEM FOR 300 RESISTORS mostly 2W

220 DIODES Various germ. & schottky

70 TRANS TO-18 TO-18A TO-18C

30 ELECTROS Highest quality

IDEAL FOR SCHOOLS, HBBYSTS, EXPERIMENTERS.

2W+2W STEREO AMPLIFIERS

Volume, tone control, all parts on PCB

2x LM-380 ICs, 12V-18V supply, add only transformer if required (extra \$4.50), 100mV input, T.H.D. 1% at 1KHz at 1.5W. Ideal mounting under turntable for cheap home stereo!

\$5.95

12V DC RELAYS

10 AMP 3 POLE QTY 1-2

Contacts QTY 2 EA

Coil: 110V QTY 10-24

Small Size \$1.80 EA

All new, top grade, do early limit - supply available now.

CASSETTE STORAGE RACK \$1 EA

Where!-75

ASST. TRANS VALVE OUTPUT & TRANNY DRIVER TRANNIES General Purpose

50¢ \$1 EA

30% Metre CABLE \$1 EA

RC-58A

NUMERICAL KEYBOARD KIT

Ideal for keyless entry lock systems, burglar alarms, etc.

Keys 0-9 and CLR key, top quality, low profile, keys are 18mm x 18mm.

\$3.90

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

6-10Hany DC FILTER CHOKES \$1

SUPER CARTRIDGES... New!

STEREO CRYSTAL

\$1.80

STEREO CRYSTAL

90¢

Telescopic Aerial

TOP QUALITY CHROME

TOTAL LENGTH 3'6"

\$1.75

SPEAKER BOXES

TO CLEAR AT 470x305x230

Suit 6" or 8" JBL

WERE \$20 NOW

\$12

BELOW COST T'able

\$6

BUILD THE KIDS TEAK Finish

U-BEAT POWER TRANSFORMER

240V Input 12V 1A 26V 1A

BRAND NEW & C'TEED, WITH SHIELD.

Lots of uses eg: Amplifiers, Power supplies, Test Equipment etc. Ask our price for quantity-totl 800 available.

\$3.95

\$7

MAD MAL

PRE-PAK electronics Pack/Post 10%

P.O. BOX 43, CROYDON 2132

718 Parramatta Rd, Croydon NSW

PH: 797-6144 Open 7 Days welcome here

2 TRANS RADIO KITS \$2.50

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

6-10Hany DC FILTER CHOKES \$1

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

2 TRANS RADIO KITS \$2.50

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

6-10Hany DC FILTER CHOKES \$1

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

2 TRANS RADIO KITS \$2.50

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

6-10Hany DC FILTER CHOKES \$1

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

2 TRANS RADIO KITS \$2.50

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1

6-10Hany DC FILTER CHOKES \$1

NEW PUSH-BUTTON PERMUTER TUNERS + Cals \$2

MANUAL Tuners \$1



SUPERB KITS from DENMARK



Additional high quality kits coming soon!

JOSTYKIT is Europe's leading manufacturer of electronic kits featuring attractively styled boxes of Scandinavian design and high quality electronic components which will satisfy the most demanding kit builder.

JOSTYKIT's staff of qualified electronic engineers and educationalists supply up-to-the-minute, reliable electronic kits, designed around space-age solid state technology, but capable of construction without any great technical know-how or practical experience.

The JOSTYKIT instruction booklets supplied with each kit give clear, precise directions for assembly and testing. For those with special technical interests, each instruction booklet ends up by describing how the kit works. You'll always learn something when you construct a kit from JOSTYKIT.

Audio

AF300 AUDIO AMPLIFIER - 3 WATTS

A real work-horse, this universal power amp has a wide range of applications such as car radio, record players and small receivers. Due to its well designed electronic circuit, the AF300 can be used over wide voltage ranges without deterioration of the specification parameters.

Kit AF300 \$25.00

AF340 40 WATT AUDIO AMPLIFIER MODULE

High quality 20-20,000 Hz, 37w RMS with low distortion.

Kit AF340 \$35.00

FM Tuners

HF325-2 QUALITY FM TUNER MODULE

The HF325 is a complete high quality FM tuner of professional standing. The tuner unit is ready-made and pretrimmed, making it child's play to assemble. Tuning range 88-108 MHz, operating voltage 12-55v ac.

Kit HF325 \$79.00

Stereo decoder HF310 \$24.00

HF310 FM RECEIVER

The HF310 is a very reasonably priced HF FM tuner. Fully trimmed, the sensitivity according to IHF standards is better than 10uV. Features 60 dB S/N ratio and low harmonic distortion.

Kit HF310 \$49.00

HF330 STEREO DECODER

Gives 40-45 dB channel separation, just add to a good quality FM receiver.

Kit HF330 \$24.00

Pre-amps (RF)

HF395 RF PREAMPLIFIER

Gain 30 dB to 20 MHz, 10 dB to 100 MHz and 5 dB to 225 MHz. Ideal to boost reception on short-wave receivers.

Kit HF395 \$6.00

HF385 VHF/UHF ANTENNA PREAMP

Superb quality with two aerial inputs and one down lead which simultaneously supplies current from the power supply. Frequency range 40-250 MHz and 400-820 MHz. Gain 9-18 dB, depending on frequency.

Kit 385 \$30.00

Box B850 \$6.00

Optional Power Supply NT410 \$20.00

Quick assembly kits

JK01 GENERAL PURPOSE AMP 0.5w \$18.00

JK02 MICROPHONE AMPLIFIER \$19.00

JK03 SINE WAVE GENERATOR 20-20,000 Hz \$30.00

JK04 FM TUNER 88-108 MHz \$30.00

JK05 27 MHz RECEIVER \$33.00

JK06 27 MHz TRANSMITTER \$29.00

JK07 DUAL TONE DECODER FOR R/C MODELS \$43.00

JK08 240 Vac LIGHT OPERATED RELAY \$20.00

JK09 SIREN KIT inc. SPEAKER \$19.00

JK10 PHOTOGRAPHIC TIMER 240 Vac \$23.00

JK101 CAR BURGLAR ALARM KIT \$55.00

Light Shows

AT465 LIGHT SHOW

Turn your music into light. Simply connect this 3 channel light show to the audio terminals of your amplifier and this quality kit does the rest for you!

Kit AT465 \$64.00

Attractive box and knobs B6065 \$25.00

AT468 4 CHANNEL LIGHT SHOW

This superb kit drives 4 lights (400w per channel) from the audio amplifier output.

Kit AT468 \$75.00

Attractive box and knobs B3265 \$48.00

AT365 LIGHT SHOW

This quality kit uses microphone input instead of connection to the audio output. 1500w max.

Kit AT365 \$69.00

Box and knobs B3265 \$48.00

FM Transmitter

HF65 FM TRANSMITTER 60-148 MHz

Will run 5w output with heat sink. Ideal for signal testing or for a miniature transmitter which could be received on a standard FM receiver.

Kit HF65 \$9.00

Ham Converter

HF305 AMATEUR BAND 2m CONVERTER

Converts 2m FM down to the FM band 88-108 MHz.

Kit HF305 \$28.00

AM Receiver

HF61 MEDIUM WAVE RECEIVER

540-1600 KHz receiver complete with ferrite coil antenna.

Kit HF61 \$19.00

Power Supplies

NT415 LAB POWER SUPPLY 0-30V

1 amp well-regulated supply for professional use. Complete with box and transformer.

Kit NT415 \$128.00

NT300 LABORATORY POWER SUPPLY 2-30V

High quality supply, regulated 2-30V dc at 2 amps with overload protection. Complete with box and transformer.

Kit NT300 \$110.00

AT320 ALL ROUND AC/DC REGULATOR

This kit is a control unit with almost incredible possibilities. Use it as a touch control, burglar alarm, timer, heat/cold regulator. Power supply is built-in.

Kit 320 \$54.00

Sydney: CUSTOM COMMUNICATIONS, 6 Orchardleigh St, Yennora Ph: 681-3455. **Adelaide:** HAMTRONICS, Goodwood Rd, Kingspark Ph: 272-8417. **Melbourne:** EASTERN COMMUNICATIONS, 898 Riversdale Rd, Camberwell Ph: 836-8635. **ROD IRVING ELECTRONICS**, Shop 499, High St, Northcote Ph: 489-8131. **Canberra:** LAICOM, Colbee Crt, Phillip Ph: 82-3581.

And all authorised Vicom dealers around Australia and N.Z.

Dealers being appointed in all areas

Distributed by:

NEW KITS

MAIL ORDERS
enclose \$1
for P & P

to

VICOM

68 EASTERN RD,
SOUTH MELBOURNE, VIC. 3205.
PH (03) 699.6700



Amateur News

FT101E discontinued

Yaesu have discontinued the FT101E, replacing it with the FT101Z! The new 'basic' transceiver is styled after their top-line model FT901, and is expected to sell in Australia for around \$850.

The FT101Z includes many of the features of its big brother, such as 6146Bs in the final, a noise blanker with adjustable threshold, AGC control (slow/fast/off), IF bandwidth tuning, clarifier on Rx and Tx etc. It has been designed to be fully compatible with the 901-series accessories, and will be available with either an analog dial or analog-plus-digital frequency readout.

1979 FACT Symposium

The 1979 Symposium on "Future Amateur Communications Techniques", the FACT Symposium, will be held over the weekend September 29-30, October 1 at a venue to be announced.

The success of the 1978 FACT Symposium held in May last year at the Strata Motor Inn, Cremorne in Sydney, has created a demand for a 'return' performance. The papers for the 1978 Symposium, though nine months in gestation (!) will have been received by those who attended by the time you read this. Additional copies are available from the Symposium committee for \$5 plus 50c post and packing.

The 1979 FACT Symposium will again be organised by Roger Harrison VK2ZTB and the NSW VHF & TV Group committee.

Call for papers: Any amateurs, or interested persons, wishing to present a paper at the 1979 FACT Symposium, topic of your choice — but related to communications techniques — should present a written synopsis or abstract to the committee by 30th May. It is intended to publish the Symposium papers before the event this year. To enable interstate amateurs to

participate in the Symposium, who may not be able to attend but would like to present a paper, the committee invites abstracts from authors who, if accepted, would be invited to submit a paper for publication in the symposium proceedings.

For further information, contact the FACT Symposium Committee, 14 Atchison St, Crows Nest, 2065. Roger Harrison may be contacted on 33-4282, between 4pm and 5pm weekdays.

New 1296 MHz record

A pity we couldn't get this in last month but the news arrived after deadline. Once again, Wal VK6KZ, operating portable from Walpole west of Albany, W.A., set another world distance record for the 1296 MHz band at 1230Z on 29-12-78, in company this time with Chris VK5MC located at Hatherleigh, near Millicent in South Australia.

The equipment used by VK6KZ/P consisted of a Microwave Modules converter preceded by a homebrew preamp using two BFR91s feeding an FT101E transceiver on 28 MHz. The transmitting line-up took output from the FT101E fed into a Microwave Modules 432 MHz transverter, followed by a homebrew varactor tripler. Power output: about 3 watts! The antenna was a one metre diameter, horizontally polarised, car-mounted parabola.

The gear at Chris, VK5MC's end comprised a homebrew receiving converter feeding a Drake R4C receiver. The transmitter took drive from Chris's 432 MHz gear to a 3CX100A5 tripler giving about 10 watts output. Antenna: 8.5 m diameter (28') parabolic dish.

The distance is 2109 km (1310 miles), an increase of nearly 13% on the previous record (set last year) of 1872 km.

The same day, about an hour after the record contact, David VK5KK at Wasleys, S.A., also worked VK6KZ/P. The distance between these two stations being 2024 km. David was running about one watt (!) to a one metre diameter dish.

Well done, fellas, that should keep Australian amateurs in the forefront of long-distance work on the UHF bands for some time.

Technical Standards

Dear Sir,

I read your magazine with interest, but found the article in January 1979 in "Amateur News" on 'Technical Standards for Amateur Equipment' to perhaps only give about half the story — mostly the "it's too hard and shouldn't be imposed on us" side. The overall minimum and harmonic

standard is, to my knowledge, set at a minimum of at least -40 dB for services operating under 30 MHz. A maximum spurious and harmonic energy level is also set which may mean that transmitting equipment may have to meet up to -60 dB suppression.

As the Vicom spokesman stated, marine services have to meet the -40 dB level, but in actual fact the equipment when installed would have attenuation of the undesirable output products of probably -50 to -60 dB owing to the fact that they are used via aerial tuning units and high "Q" loading networks. Therefore, the installation is markedly better than -40 dB.

I might also point out that the high frequency CB transceivers are required to meet a specification of at least -60 dB spurious and harmonic suppression. Also, VHF transceivers in the amateur service usually have spurious and harmonic figures of better than -55 dB, and the commercial services in the VHF range have to meet a figure of at least -70 dB. Impossible you might say, but it is not, as one well respected commercial VHF transceiver used by many organisations often exceeds -80 dB. It is, therefore, not impossible to meet the -45 dB figure being proposed.

With normal amateur design technique it is not at all difficult to exceed -35 dB with no instrumentation to measure such parameters. The normal pi-coupler will normally give you -35 to -40 dB of spurious suppression. The alteration of this circuit to a pi-L coupler can increase the suppression to -50 to -55 dB. A very simple modification surely.

The FT-7 that was tested in your laboratory gave -52 dB, and it uses only a very simple filter in the output consisting of two inductors and four capacitors following the broadband amplifier.

With broadband amplifiers it is necessary to have a filter which is suitable for each band in use. However, I have noticed that some amateur gear does not go anywhere near meeting even the -40 dB minimum level. I had some highly esteemed Collins equipment on a spectrum analyser at one time and it showed spurious at -28 dB, and a companion unit showed -38 dB.

I owned an IGL VHF transceiver at one stage, and this had numerous spurs, mainly harmonics of 36 MHz, at figures like -30 to -40 dB. This was not uncommon with some of these units when used as a 1-watt exciter, creating interference to channel 7 TV. Whether my figures are typical for these pieces of equipment I have no way of ascertaining.

As I see it, a little more care with our designs and the use of spectrum analysers, which are becoming more readily available, we could eat the -45 dB spurious output level proposed.


I, as an amateur, don't wish to cause interference to any other service on other frequencies, and as more and more services of various types are being crowded into the radio spectrum we must, of necessity, reduce our pollution in the form of harmonics and spurs.

Rodney Champness, VK3UG

Two major points were raised in the item on equipment standards in January issue's Amateur News column. The -45 dB spurious level proposed by P & T is not impossible to meet, as was pointed out from the tests conducted. ▶

Compiled by Roger Harrison VK2ZTB

Proceedings of the
Future Amateur Communications Techniques
Symposium



20-21 May 1978

Strata Motor Inn

Cremorne

Sydney

Amateur News

Manufacturers' specifications quote levels of -40 dB (or 'better than' -40 dB). Would type-approval of commercially-made amateur equipment be based on manufacturers' specifications or tests on sample equipment submitted to the Department? This question is unresolved.

Another question raised is: would equipment that required an external filter to meet the specification be approved? Clearly, as you point out Rod, this applies in some fashion to marine installations. If an external filter would satisfy requirements then transceivers such as the Collins you mentioned and the NEC CQ110E (1st harmonic: -16 dB, 2nd: -32 dB) could be 'saved' by the installation of inexpensive CB market low-pass filters.

Personally, I would like to see a statement from the Department as to the exact purpose and the role of setting equipment standards for amateur equipment — even though it may seem

self-evident. With the onus already on the amateur to ensure he does not interfere with other services, and perhaps morally, to reduce any possible contribution to spectrum pollution as a result of his activities, the imposition of equipment standards seems like another small example of over-regulation in government.

GFS release new Atlas line

Atlas Radio Inc, USA are due to release a new amateur transceiver line here through their Australian agents, GFS Electronic Imports early this month.

Known as the "Atlas 110 Line" the range consists of a high performance amateur band receiver, the RX-110, covering 80 through to 10 metres, and two "bolt on" transmitter modules, the TX-110L and TX-110H. When combined with the RX-110 these produce a high performance low cost transceiver.

The TX-110L is a low power module having 15 watts input while the TX-110H

runs around 200 watts input.

Overall size of the combination is only 31 cm (W) x 9.5 cm (H) x 24.8 cm (D) which makes the RX/TX-110 ideal for mobile operation.

Initially, only the high power RX/TX-110H transceiver combination will be available from GFS Electronic Imports. Expected price will be around \$499.00.

For further information on the Atlas 110 line and its accessories contact GFS Electronic Imports, 15 McKeon Road, Mitcham, Vic 3137. Phone: (03) 873.3939.



The Future of Amateur Radio

One of the main functions of the *Wireless Institute of Australia* according to many people, is to represent amateur radio nationally and internationally. This is quite apart from the various membership services, including the monthly journal "Amateur Radio", available to members. These are some of the functions of Amateur Radio Societies all over the world.

The WIA does represent Australian amateur radio. Officers of the Institute have spent countless hours of their own time negotiating better conditions for amateurs with the Post and Telecommunications Department. This concerns amateur radio in Australia.

Unfortunately this is not enough. Why?

Amateur radio in Australia is one of the many services governed by the Wireless Telegraphy Act and Regulations. A very large number of the Regulations stem from international radio regulations adopted by the member countries of the International Telecommunications Union. Australia is one of the 154 member countries of the ITU.

About once in every 20 years the ITU holds a general Administrative Conference to revise the international radio regulations relating to all the world-wide allocations in the frequency spectrum and various associated matters.

The last World Conference of this kind was held in 1959. The next WARC is to be held this year, also in Geneva. We call this WARC 79.

At WARC 59, the amateurs of Australia were so concerned about the amateur service that, through the WIA, they lobbied for and were successful in obtaining *amateur observer status* on the Australian delegation. This amateur was the late John Moyle, VK2JU. His attendance highlighted the fact that the amateurs must always be present at the vitally important conferences and, of course, the International Amateur Radio Union (of which Australia through the WIA is a member) is best geared to cover the general interests of amateurs. His report also highlighted the need for an amateur to be part of the Australian delegation and consequently the WIA established a fund shortly afterwards to enable this amateur participation to occur in the future.

WARC 79 is a ten week conference. Leading up to this, each country's Government must make plans and prepare a brief for the delegation. Australia has been involved with this for two years and the amateur service is one of the Committees forming part of the Planning Group. As part of the preparations for WARC 79 a meeting of Government's technical experts (CCIR) will occur in Geneva later this year. Australia will participate.

Ministerial assurances have been given that an amateur representative will be included in the Australian delegations.

Simultaneously, a tremendous amount of preparatory work has been carried out by the IARU. Once again,

Australia has been involved through the WIA. This preparation work is aimed at amateurs throughout the world influencing their governments, through amateur societies, to ensure as uniform and strong a voice as possible is heard from amateur radio. No stone is being left unturned to safeguard our future to the utmost of our ability. This is vital both now and throughout WARC 79 to ensure that commercial and other interests do not take away any of our frequencies and privileges without the strongest possible fight.

It is sadly true that all *these efforts cost money*. Members of the WIA have met the brunt of the financial burden but in comparison with America, Japan and Europe we are comparatively small in numbers.

Additional funds are essential if the radio amateurs of Australia are to assure themselves that no losses occur to our amateur service by default. Your contribution, however, small it may be, will help in the tasks ahead.

You can help in either or both of two ways. Send a donation to the ITU fund now, and join the WIA.


Donations should be sent by crossed cheque, money order or postal order made out to "WIA" and sent to PO Box 150, Toorak, Victoria 3142.

Every time you go on the air remember: the WIA helps safeguard your frequencies. *Please send your donation NOW.*

DICK SMITH ENDS

★★ THE YAESU PRICE WAR ★★

YOU REAP THE BENEFIT!

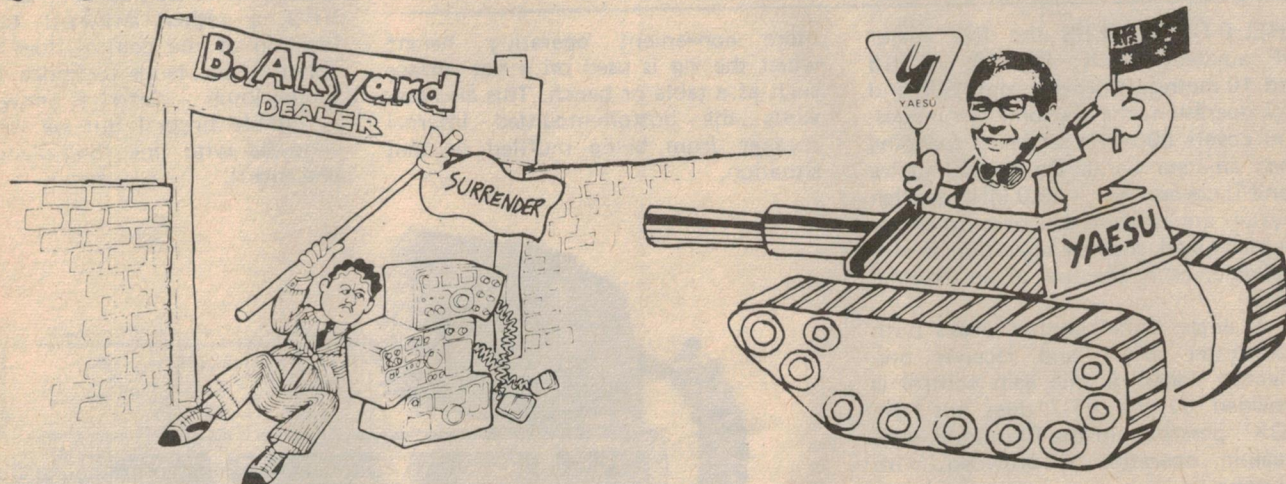

Dick Smith Electronics will better any genuine price offered by anyone on Yaesu products.

YES! This means that we will sell you a fully guaranteed, genuine unit at a cheaper price — even if we are competing with a backyard importer who probably hasn't even got provision for warranty service.

And you'll be buying from a fully Australian owned company — your one stop electronics shop who actively supports amateur radio!

HERE ARE OUR PRICES: (WE'LL SEND ANY OF THESE TO ANYWHERE IN AUSTRALIA FOR \$6 EXTRA!)

FT-101E 80-10m HF transceiver	Cat D-2860	\$789.00
FT-301 Solid State HF transceiver	Cat D-2870	\$795.00
FT-7 Mobile HF transceiver	Cat D-2866	\$375.00
FT-7 2m FM transc with memorizer	Cat D-2890	\$379.00
FC-301 Antenna tuning unit	Cat D-2896	\$219.00
FL-2100B 1.2kW linear amplifier	Cat D-2546	\$529.00
FRG-7 Solid State HF Rcvr	Cat D-2850	\$319.00
FP-301 13.8V/20A supply	Cat D-2872	\$169.00

FT-101Z New HF transceiver	Cat D-2862	\$775.00
FT-901D Top class HF transceiver	Cat D-2854	\$1349.00
FT-227RA 2m FM scanning transc.	Cat D-2891	\$379.00
CPU-2500 computerised 2m transc.	Cat D-2889	\$549.00
FC-901 antenna tuning unit	Cat. D-2855	\$249.00
FL-110 200W linear amplifier	Cat D-2884	\$189.00
FRG-7000 Digital HF rcvr	Cat D-2848	\$599.00
YC-500S 500MHz Freq. Counter	Cat D-2892	\$475.00

We believe that the prices above are better than any supplier in Australia. If you find someone cheaper for the same goods, tell us!

For us to better any price, simply show us the advertisement from any Australian company.

After checking that they have stocks available at that price we will sell for a lower price.

Offer remains open while present stocks last (approx. \$250,000 worth).

FT-7 amateur mobile transceiver

This all solid state transceiver is Yaesu's effort to provide for the increasingly popular portable/mobile amateur market. At the same time it meets the requirements of the Australian novice amateur licensee and, judging by the number on air, it's popular. Review by Roger Harrison.

THE FT-7 COVERS the five major HF amateur bands: 80, 40, 20, 15 and 10 metres. It provides only SSB and CW operation, the predominant modes, and covers 500 kHz segments spanning each amateur band. On the 10 metre band it covers 28.5 – 29.0 MHz, though crystals are available to cover other segments. Fixed channel operation is also available, as is the use of an external VFO.

A single 'tune' control peaks both transmitter driver and receiver pre-selector stages. A mic gain control is provided by the FT-7 does not have VOX operation. In the CW mode, semi break-in operation is provided, with sidetone.

A 100 kHz crystal calibrator is included.

Designed purely as a portable/mobile rig, an ac mains supply is not included but Yaesu recommend their FP-4 or FP-7 power supply if mains operation is desired.

Functionally, the FT-7 front panel is reasonably uncluttered with the controls logically placed and having good access. The usual clear, easily-read frequency dial is included along with a goodly-sized S-meter. The clarifier may be tuned on or off, as desired, and an indicator light just above the dial indicates the selected condition. A handy feature.

Immediately below the main turning knob is a linear 'calibrate' control which allows 'zero-ing' of the main dial. The crystal calibrator is used for this purpose.

The receiver audio gain and RF gain controls are piggybacked. This is a fairly common practise as the RF gain is not used nearly so much as the audio gain control.

The rig is supplied with a sturdy mobile mounting bracket, although, as the FT-7 is 230 mm wide you'll need to have a vehicle with plenty of dash space and leg room to mount it under the dash.

As can be seen in the lead picture, a pull-down stand is provided so that the front of the rig may be raised to a

more convenient operating height when the rig is used on a flat surface such as a table or bench. This also prevents the bottom-mounted internal speaker from being muffled in that situation.



On the air

The FT-7's lack of 'frills' makes for extremely simple – and convenient – operation. Tune-up and general operation were a breeze.

Audio quality on both transmission and reception were very good, sounding 'well-balanced' with regard to highs and lows.

Tuning of sideband and CW signals was generally easy, the selectivity of the receiver being not so narrow as to make tuning finicky, yet having good rejection on signals close to the station of interest.

The clarifier control had a range of plus 3.5 kHz and minus 5.5 kHz – a bit too much for our liking as it made adjustment a little 'touchy', particularly when copying several stations in a 'net' where one or two were not quite on frequency.

While we're at it, the calibrate con-

trol (beneath the main tuning knob) we found a nuisance to use. Its range was measured at plus 6 kHz and minus 12.5 kHz. As it is a linear, or slide, type of control, this made zero-ing the VFO a rather awkward task. The location of the control does not help either – one tends to knock the main tuning knob – Grrrr! (I know, I know – fumble fingers! But we weren't all endowed with fine, long piano-playing phalanges).

The RF gain control needs some care when adjusting it as the main tuning dial is easily bumped.

Crossmodulation and overload performance, while nothing to write home about, were adequate to cope under reasonable conditions on the well-populated bands. Judicious use of the RF gain control improves matters – that's an operating technique you'll have to learn.

Receiver sensitivity was excellent. The FT-7 is a top-notch rig in this department. This reviewer had no difficulty copying weak DX signals on 28 MHz.

The noise blanker was quite good, no complaints here. However, in the common with most noise blankers of this type, overload and crossmodulation performance suffer somewhat when it is in operation.

Stability was superb. We found no

YAESU FT-7 TRANSCEIVER

- * **Supplied by—**
G.F.S. Electronic Imports
15 McKeon Road
MITCHAM 3132 VIC.
(03) 873-3939
- * **Serial No:** 87G060466
- * **Recommended Price:** \$599

MANUFACTURERS SPECIFICATIONS


Frequency coverage:	3.5–4.0 MHz 7.0–7.5 MHz 14.0–14.5 MHz 21.0–21.5 MHz 28.5–29.0 MHz (other 10m crystals optional)
Voltage supply:	13.5 Vdc, +/- 10%
Current consumption:	3A on Tx 0.4A on receiver
Weight:	230mm (W) x 80mm (H) x 290mm (D) 5kg
Transmitter	
Emissions:	SSB (A3j – USB/LSB); CW (A1)
Input power:	20W (A1 and A3j)
Carrier suppression:	Better than 50dB below rated output
Opposite sideband suppression:	Better than 50dB @ 1kHz
Spurious emissions:	Better than –40dB
Distortion products:	Better than –31dB
Tx freq. response:	350–2700Hz @ –6dB
Frequency stability:	Less than 300Hz drift from cold start; less than 100Hz over 30 min. period after warmup.
Antenna impedance:	50 ohms
Mic. input impedance:	500 ohms
Receiver	
Sensitivity:	0.25uV for 10dB S/N
Image rejection:	Better than 50dB
IF rejection:	Better than 50dB
Selectivity:	–6dB: 2.4 kHz –60dB: 4.0 kHz
Audio output:	3W @ 10% THD
Audio output imp.	4 ohms

TEST EQUIPMENT

Hewlett Packard model 8553B spectrum analyser with model 8443A tracking gen./counter.
Hewlett Packard model 8558B signal generator
Hewlett Packard noise and distortion set 334A
Bird Model 43 RF power meter. Sierra 500 W dummy load.

TEST REPORT

Voltage supply:	13.5Vdc
Current drain	
Rx:	500mA
Tx (cw):	3.3A
Transmitter	
RF Power output	
CW (carrier):	14.4W (on 3.5MHz)
SSB (PEP):	17.6W
Harmonic emissions	
1st:	–56dB
2nd:	–52dB
3rd:	–63dB
Receiver	
Sensitivity at	3.6MHz: 0.09uV
10dB (S+N)/N ratio	7.1 MHz: 0.06uV 14.1MHz: 0.056uV 21.1MHz: 0.074uV 28.5MHz: 0.09uV
Selectivity; @ – 6dB:	2.4kHz
@ – 60dB:	4.4kHz
Stability:	+240Hz over 30 min. warm up
Crossmodulation:	A signal 55dB above wanted signal and 100kHz away produces a 6dB increase in audio output.
Overload:	Output distortion commences at 200mV signal input
AGC performance:	Less than 6dB audio change for 100dB change in signal level
IF rejection	78dB
S-meter	S1 = 0.6uV S6 = 4.9uV S2 = 1.1uV S7 = 6.9uV S3 = 1.7uV S9 = 16uV S4 = 2.6uV +20 = 140uV S5 = 3.5uV +40 = 1.8mV

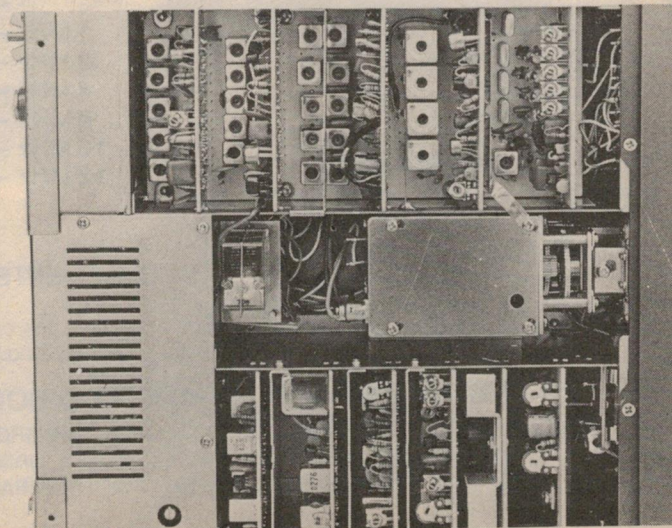

Yaesu Musen FT-7 mobile

cause for complaint here. Varying supply voltage had little effect and the rig would withstand a considerable jarring without noticeable 'warble' on the received signal. That's the sort of performance necessary in a mobile/portable rig.

On the test bench

Technical performance of the FT-7 is certainly up with the more sophisticated, and expensive, rigs.

Sensitivity right across the bands was well in excess of the specifications. Selectivity was also excellent.

Stability of this rig equalled some of the commercial gear we've handled. Drift during warmup was only 240 Hz, after warm up, the variation was no greater than plus/minus about 50 Hz, even with the clarifier on. Top one Yaesu!

As mentioned in the on-air report, crossmodulation and overload figures proved to be nothing spectacular. Still, the rig seems to be average in this regard and most operators seem to cope.

On the other hand AGC performance was very good, necessitating little use of the RF gain control in practise, except perhaps to improve matters when trying to copy a weak DX signal while the bloke two blocks away is calling CQ.

Little trouble should be experienced with signals breaking through the IF of the receiver (at 9 MHz).

The S-meter is definitely 'scotch' on weaker signals, but quite generous once they reached a 'reasonable' level. It definitely doesn't indicate the classic "6 dB per S-point", but then, few rigs do these days.

The transmitter comes up rather well on test also. The power output on CW was a little above that allowed for novices, but well within the limit on SSB. Spurious and harmonic suppression is very good for this sort of rig and little trouble should be experienced.

Current consumption at around 3.3-5 amps peak on transmit is good and certainly shouldn't be too taxing on a vehicle battery and is excellent for portable operation.

Construction of the FT-7 is very

good — the usual high Yaesu standard. The majority of the printed circuit boards are mounted vertically and 'plug in' to a 'mother' board mounted horizontally along the bottom of the chassis.

The FT-7 would represent a 'basic' amateur HF transceiver, regardless of whether it is used, or intended for use, as a portable, a mobile or a home station rig. It provides all the required basic operating facilities, without frills, and performs very well under today's band conditions.

At a cost somewhat under \$600 it represents excellent value for money. As a 'starting' rig for the novice, or as an extra rig for the old hand, it should be very hard to beat.

Comments and test results on equipment reviewed refer to the particular item submitted for review and may not necessarily pertain to other units of the same make or model number.

RISTON PRECOATED LAMINATE PRINTED CIRCUIT KITS

New GREEN RISTON precoated laminate with totally aqueous developing and stripping. High photospeed with high contrast visible latent image from negative photo-tool. All packs include all chemicals required accompanied by full instructions.

WORKSHOP PACK

3 off 250mm x 150mm (10" x 6") Pre-coated single sided epoxy glass laminate.

2 off 250mm x 150mm (10" x 6") Pre-coated double sided epoxy glass laminate.

1 Pack Developer.

1 Pack Etchant.

1 Pack Stripper.

1 Touch-Up Pen.

\$30.00 + \$4.00 Pack & Freight

STARTER PACK

1 off 250mm x 150mm (10" x 6") Pre-coated double sided epoxy glass laminate.

Chemicals and Pen as in Workshop Pack.
\$13.80 + \$4.00 Pack & Freight

Full range of sizes of Precoated Laminate available — Send SAE.

SOLID TUNGSTEN CARBIDE PRINTED CIRCUIT BOARD DRILL BITS

1mm — \$3.00 each

.8mm — \$3.00 each

PRECISION CRYSTALS

± .002% 25°C Parallel Resonant
20pF.

1 MHz — \$8.00 each

2 MHz — \$7.00 each

4 MHz — \$5.80 each

8 MHz — \$5.80 each

10 MHz — \$5.80 each

12 MHz — \$5.80 each

COMPONENTS — PACK AND POST — 80 CENTS AUSTRALIA
AND NEW ZEALAND.

2114 SPECIAL!!!!

2114 4K STATIC RAMS
450nS max. access time.

Manufactured by SEMI, Inc.
prime units

\$7.80 each


\$57.00 for 8

WRITE FOR O.E.M. QUANTITY DISCOUNTS

TERMS: AUSTRALIAN CURRENCY ONLY. 24 HOUR TURNAROUND ON ORDERS
ACCOMPANIED BY BANK CHEQUE, MONEY ORDER OR BUILDING
SOCIETY CHEQUE. ALLOW TIME FOR CLEARANCE OF OTHER
CHEQUES.

D. BOWEN

P.O. BOX 123,
BEECROFT, N.S.W.
2119



A NOTICE OF INTEREST



The local hams in the colony of New Holland are duly advised that Trio-Kenwood have just received a shipment of the new Power Plus TS-120S series.

Engineered for the more discerning amateur operators. The TS-120S is the most recent successful result of Kenwood's advanced engineering capability, giving a compact, lightweight transceiver with 100W RF output power.

Another new arrival is the TR-7625 2 meter FM transceiver with memory, designed to permit multichannel (800-channel) operation.

You are respectfully invited to view this merchandise at your local friendly Trio-Kenwood retailer.

PS-30 20A Power Supply.
SP-120 Speaker unit.
TS-120S HF SSB Transceiver.
VFO-120 Remote VFO unit.



TR-7625
2M FM Transceiver.



TS-770

P.S. We would like to inform all VHF buffs
that we now have Phase III Satellite Equipment.

TRIO-KENWOOD (AUSTRALIA) PTY. LTD.

31 Whiting Street, Artarmon, Sydney, N.S.W. 2064. Telephone (02) 438-1277

Interstate Distributors:

VIC: VICOM IMPORTS PTY. LTD. (03) 699-6700 • QLD: MITCHELL RADIO CO. (07) 57-6830 • S.A. & N.T.:
INTERNATIONAL COMMUNICATIONS SYSTEMS PTY. LTD. (08) 47-3688 • W.A.: WILLIS TRADING CO. (09) 321-7600
• TAS.: ADVANCE ELECTRONICS (003) 31-5688

PLUS MANY OTHER REGIONAL OUTLETS THROUGHOUT AUSTRALIA

predictions

for May 1979

These predictions cover the frequency range between 3 MHz and 40 MHz showing the times propagation is possible over the paths designated for each chart, as well as the probable mode of propagation. For full information

on how to use the graphs, refer to ETI issues Nov-Dec '78, Jan-Feb '79 or the ETI/Trio-Kenwood poster given free in the December '78 ETI.

For reliable predictions follow the time:

and frequencies indicated by the F character on the printouts. Time goes from 0000 UT to 2300 UT, left to right across the graph. These GRAFEX style of computer generated predictions provided courtesy of the Australian Ionospheric Prediction Service.

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
1600 KMS.
75.1

East Coast — Europe (Short Path)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
13180 KMS.
140.0

East Coast — South America (also serves South Central)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
11700 KMS.
120.9

North East — South Africa

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
11811 KMS.
126.6

East Coast — Japan (also serves NE and South Central)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
13433 KMS.
59.2

East Coast — North America (also NE and South Central)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
14483 KMS.
102.6

North East — North Africa

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
11031 KMS.
135.2

East Coast — South Africa (also serves South Central)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
5212 KMS.
86.3

East Coast — South Pacific

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
5738 KMS.
100.8

North East — South Pacific (also serves South Central)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
14793 KMS.
BEARING OUT 122.8

East Coast — North Africa (also serves South Central)

40	34
39	33
38	32
37	31
36	30
35	29
34	28
33	27
32	26
31	25
30	24
29	23
28	22
27	21
26	20
25	19
24	18
23	17
22	16
21	15
20	14
19	13
18	12
17	11
16	10
15	9
14	8
13	7
12	6
11	5
10	4
9	3

MAY 1979
14570 KMS.
65.2

North East — Europe (Short Path)

40
39
38
37
36
35
34
33
32
31
30
29X.
28X.X.
27X.X.X.
26X.X.X.X.
25X.X.X.X.X.
24X.X.X.X.X.X.
23X.X.X.X.X.X.X.
22X.X.X.X.X.X.X.X.
21X.X.X.X.X.X.X.X.X.
20X.X.X.X.X.X.X.X.X.X.
19X.X.X.X.X.X.X.X.X.X.X.
18X.X.X.X.X.X.X.X.X.X.X.X.
17X.X.X.X.X.X.X.X.X.X.X.X.X.
16	X.X.X.F

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

West Coast — North
America


West Coast — North
Africa

West Coast — Japan

West Coast — South
Africa



CONTINENTAL SPECIALTIES CORPORATION DIGITAL PULSER DP1

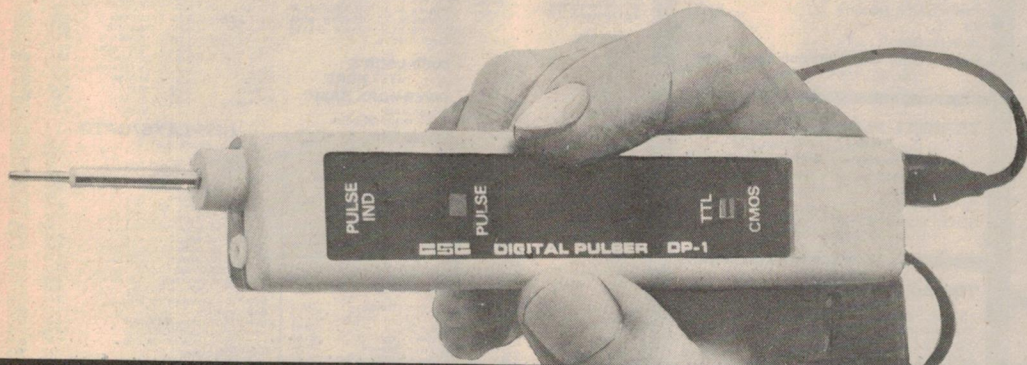

- Automatic polarity sensing delivers pulse of opposite polarity.
- Single pulse or 100 pps train.
- Sink or source 100 mA.
- LED indicator.
- TTL, DTL, CMOS logic.
- Complete with power lead.
- Max current draw 30 mA even when driving a short circuit.
- Weighs only 85 gm.



GENERAL ELECTRONIC SERVICES PTY. LTD.
99 Alexander Street, Crows Nest, NSW. 2065.
Phone: 439-2488, 439-2399. Cables: SERVO SYDNEY.
Telex: 25486 A/B SERVO.

Adelaide: 42-6655.
Canberra: 80-4654, 82-3581.
Brisbane: 277-4311.
Melbourne: 598-9207, 598-5622.
Newcastle: 69-1625.
Perth: 325-5722.



MATRA

100 WATT R.M.S.

FULL RANGE SPEAKER SYSTEM
SUITABLE FOR DISCO/SOUND REINFORCEMENT

FEATURES —

- Carpet covering • Nickle plated corners • Steel mesh grille • 100 watt special design speaker by Etone • ¾" timber construction • 2 x phono sockets • Size: 500mm high, 470mm wide, 260mm deep • Impedance: 8 ohms • 2 year warranty.

TRADE ENQUIRIES WELCOME
For further information:



MUSICAL INDUSTRIES
3 Staple St, 17 Mile Rocks, Qld. 4073. Ph: (07) 376-4122.

\$125 each plus freight.



VOICE of NIGERIA

Compiled by the Australian Radio DX Club (ARDXC). For further information regarding shortwave radio and ARDXC's activities, write to either PO Box 67 Highett, Vic. 3190, or to PO Box 79, Narrabeen, NSW 2101, with a 30c stamp.

All times are in Greenwich Mean Time; add 10 hours to convert to Australian Eastern Standard Time. All frequencies are in kiloHertz.

Nigeria

The Voice of Nigeria in Lagos has introduced the new outlet of 15185 replacing 15120, for the English language service daily from 0555 to 0835.

The 19 metre band outlet is used in parallel with 11770 and 7255. Also, 15185 is used for the French language program from 1930 each day. Both these services are directed to Europe, but also give generally reliable signals in east Australia.

Malawi

The Malawi Broadcasting Corporation in Blantyre provides its schedule for shortwave transmissions, which shows the use of 3380 from 0257-0520, and again between 1750 and 2215.

The 49 metre band channel of 5995 is in use between 0500 and 2110, and 7130 is used from 0600 until 1715 each evening.

Most programs are designed for domestic audiences, however there is a daily International Service on 7130 only, from 1600 until 1800 in both English and the local Chichequa language.

The station is pleased to receive reports from overseas listeners, and these may be forwarded to: Malawi Broadcasting Corporation, PO Box 30133, Chichiri, Blantyre 3, Malawi.

Oman

The Sultanate of Oman, at the strategic entrance to the Arabian Gulf, has introduced shortwave transmissions only in very recent years.

Radio Oman operates from the capital, Muscat, with one 50 kilowatt and one 10 kilowatt shortwave unit. The current transmission schedule received from the station shows English programs between 0900 and 1100 on 11890.

Other programs are in Arabic and are broadcast on 6175 from 0200 to 0715, and again from 1400 to 2015. Arabic programs on 11890 are broadcast from 1100 until 1315 daily.

The station advises that its schedule will be slightly revised from the beginning of May, with the 0200-0715 transmission being switched from 6175 to 11890. Radio Oman's address is PO Box 600, Muscat, Sultanate of Oman.

Indonesia

Closer to home, the Voice of Indonesia in Jakarta has introduced the new outlet of 15200 for foreign language programs. Voice of Indonesia's English service may be heard on the new outlet from 1400 until 1500 each evening and 15200 also carries English from 0130 until 0200 daily.

Chile

The Voice of Chile in Santiago has a new outlet for foreign language services, with 11780 now being used in our local mornings. Italian is now on 11780 from 2200 until 2230, with German noted from 2230 to 2300.

The Voice of Chile's language schedule is somewhat unreliable, with

different language segments being aired at varying times from day to day, though English segments are listed for transmission in half-hour segments at 2330, 0230 and 1100 daily.

Current frequencies for the 1100 service are 11755, 11775, 15110 and 15125.

Belgium

Radio-Television Belge, the French language section of the Belgian radio, provides the following details of its schedule for broadcasts from Monday to Saturday up until March next year. All transmissions are in French:

0500-0615 on 11850 and 9615.

0630-0800 on 17765 and 15210.

1030-1330 on 21460 and 15210.

1530-1645 on 21460 and 5965.


and 1700-2130 on 17715 and 11735.

The DX program is broadcast every Friday at 1830, with DX host being Paul Renard.

Hungary

Radio Budapest has a DX program in English, broadcast every Wednesday and Saturday from 0400-0415 on frequencies of 15220, 11910, 9833, 9585, 6105 and 6040.

Microwave Survey Meter Model HI 1501

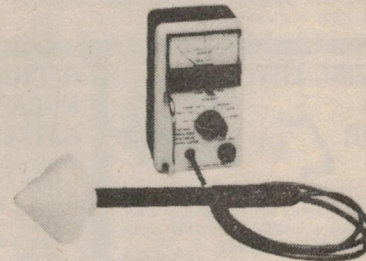

The HI 1501 is a rugged, compact, portable instrument and is virtually immune to failure caused by excessive fields or physical abuse. It consists of a lightweight instrument package connected to a unique detection probe by a shielded cable.

For additional information
call or write:

**Reg Geary
& Associates**

276 Highett Rd, Highett, Vic.
Phone (03) 553-1935

Bill Edges' ELECTRONIC AGENCIES

115-117 PARRAMATTA ROAD, CONCORD. 2137. Tel: 747-6472.

SUNDAY OPENING

As from 1st April 1979, Bill Edges' Electronic Agencies will be open on Sundays. For all you electronic experts who have to work 5½ days a week. If you're looking for that particular piece of equipment to finish a job, or you just want to browse, we have a great selection of goods which are all well displayed. **Remember, we're open Sunday 10am to 2pm. Every Sunday.**

100 WATT RMS 8 OHM SPEAKERS

Beautifully manufactured Australian made speakers. Use as a woofer in your hi-fi system, for disco's, clubs — wherever a great deal of power has to be handled. Frequency response: 25-4 KHz. Resonant frequency: 30-35 Hz. Sensitivity: 96 dB. Power: 100 watts RMS. **CAT. 1203 \$75**



WIRE LESS INTERCOM

No connecting wires required. Merely plug into a power outlet (240 VAC) and the audio is sent via the electrical wiring. No batteries required as the 240 VAC also powers the units. Both stations must be plugged on same side of power line distribution transformer. All intercoms use same audio frequency so adding extra stations is no problem. We also have very large stocks of conventional intercoms. **CAT. 1950: \$48.95 pair**



Extremely LONG GOOSENECK MICROPHONE

High impedance, uni-directional complete on heavy-duty base with on/off switch & a gigantic 12" gooseneck. Frequency response 70-12KHz. Sensitivity — 50dB. Impedance 50K ohms, 3.5 meters cable. Just one of many mikes we carry. **CAT. 1330 \$29.95**




PHILIPS FM320 UHF, 40 Ch. 2-WAY RADIO



With the only licensable freq. band for CB in 1982 (all 27MHz equipment will then be illegal). 5W RF output. Because UHF operates on FM, interference has little effect on reception. UHF does not cause TVI. **CAT. 2050. \$269.** (RRP \$330) Save \$61.

CELLULAR HORN SPEAKER



Beautifully made tweeter — looks fantastic mounted onto board — adds good looks and all good treble — just look at these specs: 2KHz-20KHz, max power 30W, 8 ohms. **CAT. 1235. \$9.75**

This tweeter is one of many we have!

COLOURED LAMPS



Live up your Musicolour, party or house with these economical 100 watt bayonet cap lamps. Suitable for Discos too. Approx 200mm across front.

CAT. 6750. Red \$5.99
CAT. 6752. Green \$5.99
CAT. 6754. Orange \$5.99
CAT. 6756. Yellow \$5.99

RALMAR FAMOUS CASSETTES

(As advertised on TV): Well below rec. retail. Try them and you'll wonder why others are twice the price.



	1 to 9	10 UP
C60 SQ	89c. ea.	81c. ea.
C60 LH	\$1.29 ea.	\$1.17 ea.
C90 SQ	\$1.19 ea.	\$1.08 ea.
C90 LH	\$1.65 ea.	\$1.49 ea.

We also stock DINDY Cassettes.

ELECTRONIC PROJECT KITS

Kits marked right down to give novices a chance. For economy no circuits are included — they are all available in one volume of "Project Electronics" — only \$4.75. No batteries or cases included but everything supplied to get them working.

Continuity Tester, Cat. 9018	\$3.00
Soil Moisture Indicator, Cat. 9016	\$4.75
500 Second Timer, Cat. 9014	\$4.50
Morse Practice Set (less key), Cat. 9012	\$3.50
Morse Key to suit	\$1.95
Basic Amplifier, Cat. 9010	\$5.50
Electronic Bongos, Cat. 9008	\$5.00
Electronic Siren (less speaker), Cat. 9006	\$5.50
LED Dice, Cat. 9004	\$5.90
Battery Saver (12VDC to 9VDC), Cat. 9002	\$3.90


10 percent discount available on above if 10 or more purchased. These kits are just a few of a very comprehensive range including Amps, Musicolour, Strobe, Drill Speed Control, TV Games, many many more.

TRANSFORMERS

Fiat ballast type — extremely good value — enormous voltage and current range. Made by Ferguson Transformers.

PL24/60VA, 24V at 2.5A (12V-0-12V), 12V at 5A	\$13.99
PL30/60VA, 30V at 2A (15V-0-15V), 15V at 4A	\$13.99
PL18/60VA, 18V at 3.33A (9V-0-9V), 9V at 6.67A	\$13.99
PL15/20VA, 15V at 1.33A (7.5V-0-7.5V), 7.5V at 2.67A	\$8.50
PL18/20VA, 18V at 1.11A (9V-0-9V), 9V at 2.22A	\$8.50

There are 15 other types of transformers in our varied range.



PL24/20VA, 24V at .83A (12V-0-12V), 12V at 1.67A	\$8.50
PL30/20VA, 30V at .67A (15V-0-15V), 15V at 1.33A	\$8.50
PL40/20VA, 40V at .5A (20V-0-20V), 20V at 1A	\$8.50

PHILIPS SPEAKERS & SPEAKER KITS

AD12K12 12" 3-way Kit, Cat. 1287. **\$337 pair** (RRP \$399) **Save \$62.**
AD8K30 8" 3-way Kit, Cat. 1282. **\$242 pair** (RRP \$299) **Save \$57.**
AD0160T8 1" Dome Tweeter, Cat. 1232. **15** (RRP \$17.50) **Save \$2.50.**
AD5060/SQ8 5" Hi-Fi Midrange, Cat. 1222. **\$23** (RRP \$25.80) **Save \$3.00.**
AD8066/WI 8" Hi-Fi Woofer, Cat. 1212. **\$28** (RRP \$30.80) **Save \$2.80.**
AD12100/W8 12" Hi-Fi Woofer, Cat. 1202. **\$79** (RRP \$95.65) **Save \$16.65.**
ADF500/4500/8 3-way Crossover, suit AD12K12 system, Cat. 1256. **\$50 pr.**
ADF600/4000/8 3-way Crossover, suit AD8K30 system, Cat. 1257. **\$79 pr.** (includes leads, fastons & attenuators)
First-class quality (European made). Virtually nothing to compare them with in this price range.

AMAZING LITTLE SWR METER




For CB's. 3.5 MHz-50 MHz. Measures power and SWR. Keep in circuit and monitor your SWR! Power all the time. Ideal for limited space, comes complete with mounting bracket.

Only \$15.50

Just one of a complete range of CB and Amateur radio accessories.

RECHARGEABLE NI-CAD BATTERIES


AA (Penlite), 1.2V 500 mAh, \$1.75.
C size, 1.25V 1.2 AH, \$3.63.
D size, 1.25V 1.2 AH, \$3.99.



NI-CAD CHARGER — 12V at 25mA, will charge from 3 to 10 1.2V batteries at one time, current automatically adjusts. **\$11.50.**


FANTASTIC SELECTION

Of transistors, IC's, diodes — our range is too numerous to print.



Please give us a try!

SLOPE ADJUSTER



You want to put your aerial on the bonnet, boot or mudguard but can't get it vertical. What you need is a SLOPE ADJUSTER. Extremely strong with wide angle.


\$8.95

TIMER

This German made Timer operates from 240VAC and can switch 240VAC at up to 16 A. It has capabilities for 3 on/off settings in a 24 hour period. Can handle times from ½ hour to 23½ hours. Very robust.

ONLY \$35

AC/DC CASSETTE RECORDER



With AM Radio (in-built mike). Very compact. Can be run off 240VAC or batteries. A very versatile unit.

ONLY \$39.95

MOST FANTASTIC BUY OF THE SEASON



BSR stereo belt drive turntable. Comes complete with base and cover. Fitted with famous ADC cartridge.

ONLY \$99

BILL EDGES' ELECTRONIC AGENCIES 747-6472

MAIL ORDER SERVICE

Complete mail order service. No minimum. All orders processed same day. Please allow \$1.00 to cover pack/post plus 5 percent of order value up to \$80 and a maximum of \$4.00 over \$80. All bulky and heavy items sent freight on.

Business hours: 9am-5.30pm Mon-Fri. 9am-Noon Saturday. 10am-2pm Sunday.

MAIL ORDER: PO BOX 1005, BURWOOD NORTH. 2134.

SWL News

World Radio TV Handbook 1979

This is 544 pages of up to date information on broadcasting in every country in the world and is essential reference material for any shortwave DXer.

Not only are the detailed schedules of all radio broadcasters given, but also listed are station personnel, postal addresses and current policy regarding listeners' reception reports.

Such details are essential for those DXers interested in gaining verifications from stations around the world.

The ARDXC is still taking orders for the WRTVH 1979, and you can get your copy delivered to your door for just \$16, which includes packing and airmail registered postage from the publishers in Denmark.

Special features this year in the WRTVH include an article about missionary broadcasters around the world, and an article outlining the expected High Frequency broadcast reception conditions during 1979.

Mexico

Radio Mexico in Mexico City has introduced the new outlet of 15430 for broadcasts in Spanish every day from 2155 to 0500. This frequency replaces the long-used 15385, but suffers interference from both the Voice of America and the American Forces Radio and TV Service, both using 15430 for much of the day.

However, Radio Mexico is generally free of interference from 0400 until sign off at 0500.

Australian DXers meet

This month, over the Easter break, members of the Australian Radio DX Club from all over Australia will meet in Mount Gambier, South Australia for the 6th annual ARDXC Convention.

The program for the weekend will include films on DXing, discussions, the club annual general meeting, and the chance to renew or strike up new friendships with fellow DXers in an informal atmosphere.

People interested in the DX hobby would find Easter an ideal time to come along to Mount Gambier and find out more about our fascinating pastime.

Libya

This is another country of the Arab world which has recently introduced a new channel, being observed on 7120 kHz, also signing on at 1500 daily with the anthem and Koran readings. This may be a new service relayed from the

Malta relay site, as the transmission is observed to conclude at 1530 on 7120 kHz.

Laos Broadcasters

Laos is an unusual country in that most of the regional stations broadcasting for the home audience in their own region provide better reception in Australia than the program for overseas listeners transmitted daily from the capital, Vientiane.

The regional station at Houa Phan is audible in Australia during the evenings during the 1300-1430 service, using both 6198 and 4657.

The Pakse station uses 6597, for programs between 1000 and 1400 daily. The station at Xieng Khouang is well received in Australia on 6675 during its evening service 1000-1400, and you may also be able to hear the station on its parallel channel of 4757, which should fade in by 1200 in east Australia.

Probably the best Laotian signal in our evenings is provided by the station at Savannakhet on 7383 during its 1100-1400 transmission.

The stations at Pakse, Xieng Khouang and Savannakhet all relay the news from Vientiane at 1200 every night, and this will begin with a clock chiming 7pm local time, and station identification.

The identification announcement may be difficult to catch, and it is recommended that a tape recorder be used. The identification at the start of the news from Vientiane will usually go like this: "Thini Withaya heng Sat, kachai sieng chak Wianchan..." which translates as: "This is the National Radio, broadcasting from Vientiane..."

Vientiane itself has a shortwave service on 6130 for domestic coverage, and this is audible most nights in east Australia between 1200 and 1530. The Overseas service from Vientiane is broadcast on 7145 each evening, but at the time of writing this channel was suffering severe interference from jamming transmitters, making reception of the program very difficult. When 7145 is free of interference, Vientiane may be heard in French 1300-1330, and in English 1330-1400.

Vientiane has recently begun to verify correct reception reports from listeners overseas. If you would like to try your luck, then the address is: The National Radio of Laos, B.P. 310, Vientiane. The exact address for the regional stations are not available, but it would be advisable also to write to Vientiane for verification of reception of a regional outlet.



for M.A.T.V. components equipment

amplifiers



The widest choice in wideband and amplifiers 40-860 Mhz

Fully designed and manufactured in Australia by "ELECTROCRRAFT", with a background experience of over 14,000 M.A.T.V. systems. A range of Medium and High gain R.F. DISTRIBUTION amplifiers, suitable for all TV and FM Radio transmissions within the VHF and UHF Bands 1 to V. At present there are 8 amplifiers in our range, with greater output models to follow. Most models require very low input and have good signal to noise ratio, as such this makes them very suitable for weak signal areas. A high brightness red panel light with solid state reliability on all models. Model 40-100WN has been designed for Wollongong and Newcastle, the local channels (4 and 5A Wollongong) (3 and 5A Newcastle) are attenuated by 24db allowing the distant Sydney channels to be amplified without the problems of cross modulations from the local channels. The two models 40-100HL — 40-500HL are provided with gain controls, which are independent of each other in their operation, each control has a variable attenuation of 20db. The case is steel, covered in black vinyl finish, dimensions are 23 x 14 x 8 cm.

splitters for TV



Ecraft splitters are of high quality, moderately priced and are designed especially for Colour M.A.T.V. Systems. The range covers from 40M/z VHF to 840M/z in UHF band, 2 way through to 8 way making them the most comprehensive range in Australia. All models are power passing, rugged construction, size 3 1/2" diameter. For outside use in waterproof case, saddle and clamp can be supplied for most fixing.

Screws, saddle and clamp connection

TYPE	FREQUENCY RANGE	INSERTION LOSS		SIDE LOSS	
		VHF	UHF	VHF	UHF
2.75 T.S.	40-840 Mhz	3.5db	7db	20db	20db
3.75 T.S.		6.5db	8db	16db	16db
4.75 T.S.		6.5db	8db	16db	16db
5.75 T.S.		8db	9db	15db	13db
6.75 T.S.		8db	9db	15db	13db

Complete technical M.A.T.V. advisory and planning service available. We are the experts — 30 years in the antenna business.

ELECTROCRRAFT

PTY. LTD.

68 Whiting Street, Artarmon, 2064
Telephone 438-4308, 438-3266

Open Mon. to Fri. 8-5. Sat. 8.30-12.

MAIL ORDERING FROM US MAKES CENTS FOR YOU! PRICE INCLUDING SALES TAX SHOWN IN BRACKETS

If any of these models are advertised in this magazine at a lower price, tell us and we will supply them at a better price.

Send SAE for our free complete discount price list of — ● Texas ● Hewlett Packard ● Canon ● Casio ● Sanyo ● Sharp ● National Semiconductor ● WHY PAY MORE?

We can equip your business for dollars less. (Write or phone for details)

NEW! CANON AX-1 and BX-1 (basic)

Desk computers (Floppy Disk, Expandable etc.) Desk Calculators ● Answering Machines



TEXAS PROGRAMMABLE SYSTEMS

PC100A Alpha-Numeric Printer \$278 \$210 (\$234)


For Ti 59 and 58 — Lists, Traces, Prints Words (64 characters), Plots Graphs, etc.

MODULES \$35 \$32 ea. plug into Ti59 or 58. Pre-programmed with approx. 5000 steps.

- Leisure Time
- Marine Navigation (\$28 ea.)
- Aviation
- Real Estate and Investment
- Statistics
- Surveying
- Business Decisions
- Securities Analysis

NEW MODULES

- Maths/Utility
- Electrical Engineering



PC100C & Ti 58/59

GREATEST PACKAGE OFFER EVER!!

A Ti59 and PC100A printer ~~\$686~~ only \$450 (\$503)

A Ti58 and PC100A printer ~~\$449~~ only \$315 (\$351)

(Also any extra modules ordered with package only \$30 ea.) NEW HOME COMPUTERS COMING!

Ti59 ~~\$428~~ \$245 (\$274)

Programmable to 960 steps or 100 memories, also master module with 5000 steps, magnetic cards, 3 manuals, program pad, charger, carrying cases, etc.

Extra Magnetic Cards

Pack of 40 and case \$15


Specialty Pakettes \$10 ea

Programs for mag. cards —

- Electronic Eng ● Civil Engineering ● Statistics
- Programming Aids (Decoders and disassemblers) ● Securities
- Oil/gas energy ● Black body ● Printer utility

ALSO Ti58 ~~\$141~~ \$108 (\$120)

Programmable to 480 steps or 60 memories, otherwise same as Ti59 except for magnetic cards.



Ti 58/59



HP 33E

HP 19C \$210 (\$234) Same as 29C — with

printer; HP 38E \$120 (\$134)

Programmable — Business; HP 67 \$450

(\$501) Card programmable; HP 97 \$750

(\$835) Desk model of 67 with printer.

HEWLETT **hp** PACKARD

HP's ONLY — POST FREE!

(New low prices)

HP 31E \$60 (\$67)

(Replacement for HP21)

HP 32E \$80 (\$89)

(Replacement for HP45)

HP 33E \$100 (\$112)

(Replacement for HP25)

HP 29C \$162 (\$181)

(Continuous memory)



HP19C

Pack and Post — All LCD models \$1.50 anywhere in Australia. Otherwise \$2.00 for NSW, elsewhere \$3.00 per order. (Extra \$1.50 for registered) Sales Tax Forms must be duly signed and stamped. (Forms available).

bankcard welcome here

Note: We will negotiate price on quantity orders.

Copy and complete.

Please debit my Bankcard \$.....

No. Expiry Date.....

Signature


Name & Address

ELECTRONIC CALCULATOR DISCOUNTS

Phone (02) 624-8849 (8am till 3pm) PO Box 106, Baulkham Hills, NSW. 2153.

"THE \$100 BUS STOP"

\$100 16K RAM



16K, 2114 Low Power chips 1.2 Amps typ. for 16K, 300 or 450 nS, 4K addressing, 4K Write Protect switches, Bank Select, Wait states, plated thru holes, solder mask, see Feb. ETI project for details.


ASSEMBLED & TESTED \$366 plus \$5 P&P Reg. mail.

\$100/6800 CHASSIS



11 slot backplane, fully card guided, 10 Amp power supply, fan, key switch, bench mount, rack mount, anodised alum. Sent FOB IPEC Transport. BASIC BENCH MOUNT \$189. BASIC RACK MOUNT \$166. ACCESSORIES KIT \$46. \$100 POWER SUPPLY \$79. 6800 REGULATED POWER SUPPLY \$104.


\$100 I/O PORT BOARD



9 Parallel ports (programmable), 1 SERIAL PORT — TTY — RS232 — or TTL, BAUD rate generator 9600 to 75, Fully address decoded, Low Power buffers, Plated thru holes, solder mask. KIT PRICE \$164 P&P \$3.

- \$100 16K Eprom board kit...\$90 plus \$3 P&P
- \$100 Z80 CPU board kit...\$149 plus \$3 P&P
- \$100 FLOPPY DISK CONT.....KIT \$159 plus \$3 P&P
- \$100 8 slot Backplane.....\$22.50
- \$100 11 slot Backplane.....\$36
- \$100 100 way connector.....\$8.00
- \$100 WIRE WRAP board.....\$22.50
- \$100 Extender board kit.....\$22.50
- NUMBER CRUNCHER KIT.....\$49.50
- PAPER TAPE READER KIT.....\$69.50
- FRONT PANEL DISPLAY KIT.....\$87.50
- 8080 SINGLE STEP CONTROL.....\$21.65

UV EPROM ERASERS



New product range, Model LEE/T 15W tube, 20 min. timer, up to 40 EPROMS, will erase in 10/15 mins. Model MEE/T 8W tube, 20 min. timer, up to 10 EPROMS will erase in 20/30 mins. Model MEE is the same as MEE/T but with no timer. All erasers are fully assembled and have a safety switch. LEE/T \$105, MEE/T \$83.47, MEE \$73.90

● DISK DRIVES

SHUGART SA400\$355 P&P \$5
SHUGART SA800\$580 P&P \$5

● 6800 PRODUCTS

6800 5 slot backplane\$26.50
6800 11 slot backplane.....\$36.00
6800 11 slot chassis (basic).....\$166.00

● EPROMS & RAM CHIPS

2708 450 nS GUARANTEED\$12.00
2716 450 nS single supply\$43.50
2114 LOW POWER 450 nS.....\$8.50
2114 LOW POWER 300 nS.....\$10.00

Send 60c in stamps for COMPUTER PRINTOUT CATALOGUE for more details.

ALL PRODUCTS AUST. MADE AND IN STOCK (ALMOST). DEALER ENQUIRIES WELCOME.

SM ELECTRONICS
MELBOURNE

bankcard
welcome here

SM ELECTRONICS

10 Stafford Crt, Doncaster East, Victoria. 3109.

PO Box 19, Doncaster East, 3109. Phone: (03) 842-3950.

BUILT & TESTED POA. ALL PRICES ADD 15 PERCENT S/T IF APPLICABLE.

Mini-Mart

send your ad to —
ETI MiniMart,
Modern Magazines,
15 Boundary Street,
Rushcutters Bay,
NSW 2011.

WE'LL PRINT your 24 words (maximum) totally free of charge. Copy must be with us by the 1st of the month preceding the month of issue. Please, please write or preferably type your adverts clearly.

CONDITIONS

Name and address plus phone number (if required) must be included within the 24 words allowed.

Reasonable abbreviations, such as 25 Wrms, count as one word.

Private adverts only will be accepted. Please let us know if you find a commercial enterprise using this service.

Every effort will be made to publish all adverts received — however, no responsibility for so doing is accepted or implied.

Adverts must relate to electronics or audio — general adverts cannot be accepted.

SELL: 2650/PIPBUG ICs. Never used \$40 inc manual, data, postage. Keyboard wired cost \$60, sell \$45. R Munn, 46 Dudley Ave, Daw Park, 5041. Phone (08) 293.4925.

WANTED: Used 3-speed turntable without arm. Garrard 301 or similar Collaro, Neat, etc. (02) 451.9608 evenings.

COMMUNICATIONS receiver Marc NR-52F1 12 band, .15-30, 65-175, 430-475 MHz. Ex cond, hardly used \$200. Details from G C Williams, 19 Wicklow Avenue, Athelstone, SA 5076 (08) 337.4705.

SELL: Mint condition. Teletype ASR33 complete with 20 mA, & RS232 interfaces, manuals, etc. \$580. Phone (02) 487.2972.

SELL: Honeywell key tape computer has 9 track NRZ. 10½" drive keyboard, memory, etc. \$200 ONO. Phone: (02) 487.2972.

SELL: Three American Field Manpack, Combat FM Transceivers, Type ANPRC25 2000 channel digital select complete with unused clip-on RF amps. \$1900, will not separate. Phone: (02) 487.2972.

NAKAMICHI 600 cassette deck, brushed aluminium, 18 months old. Excellent condition & performance. Sell for \$600 or best offer (02) 239.1519 (ask for Alfie).

SELL second hand: 100 electronic projects book, \$1.25; 741 IC, 50 cents; tagstrip, 25 cents; ceramic capacitors and wirewound resistors 25 cents each. Andrew Pam, phone (03) 80.4221.

SELL Garrard MRM101 noise reduction unit as featured in ETI January 1979, 1 month old. Changing to all tape system \$90 BH (03) 697.7354, Wright.

ETI 3600 Synthesizer for sale. Fully assembled and working \$900. Contact Nigel Smith, Baulkham Hills, Sydney on 639.1868.

SELL: Texas Instruments TI30 calculator with adapter/charger. Cost \$36, sell \$25. Suit tertiary or secondary student. Phone: (02) 80.1296.

HP67 224 step, card programmable scientific calculator. 100 blank mag cards, std pack and users library. \$450, R King, PO Box 474, Sandy Bay, 7005.

WANTED to buy TV service manuals. Colour, black and white. J Ferrie, 5 First Avenue, Lane Cove (02) 427.6767.

FREE membership, Lakeside QSL Swap Club, send any number your personal QSL cards and 25 cents stamp for equal swaps and free membership registration. PO Box 114, Toukley, NSW 2263.

RAM 8K-450 ns, S100 memory card (assembled) \$185 (02) 84.2130 (business), ask for Bernie, or after 5 pm 14 Northmead Avenue, Northmead.

SELL power supplies: 5th desperate attempt at a sale. -90V to +30V at 1A — \$15; -14V to +20V at 5A — \$30; +5V to -5V at 50A — \$40 ONO. (02) 682.4015, K McLean, 6/34 The Trongate, Granville.

SELL multi 7 2m FM transceiver. RPTRS. 1 to 8, simplex 40, 50 and 51. \$150 - 3 years old. Extra 'Xtals \$7/pair from 'Jan' (02) 682.4015, K McLean, 6/34 The Trongate, Granville.

WANTED CRT monitor - green preferably. Ring AH John Pitman (08) 45.4372 or write 12 Percy Street, Seaton, SA 5023.

SELL: K25 MR 3W 3ch hand held with CB Xtals and touch tone and rubber duck \$60 (07) 264.1817, Brisbane.

SELL: Yaesu FR-101 deluxe digital receiver. AM. SSB. FM. Ham-SW. Broadcasts 5m and 2m. As new, cost \$900, sell \$500. Further details, Mr Lockerbie, Cameron Street, Merimbula 2548.

SELL General Electric A3-5825 18 chan. LED SSB/AM with ant. Warn & TX mod lights RF gain extras \$150. Cole, 5 Belmont Road, Glen Waverley, Vic 3150 (03) 232.3626.

MICROCOMPUTER system - Baby 2650, EA economy VDU, RECI cassette interface, housing, games and programming paks. All assembled and working. \$345 - Garry (02) 90.4919.

ETI for sale: June '77 to Dec '78 except Feb & Nov '78. Also 9 assorted EA, PE - \$20. B Easton, 52 Frenchs Forest Road, Frenchs Forest. Phone 451.4795.

60 Watt car amplifier, Ferris FA-204. Brand new, has not been unpacked. \$39 plus postage. Edward Jozis 170/332 Park Street, South Melbourne, 3205.

SELL: Heath H8 computer, 16K RAM, serial, parallel I/O. Minifloppy disk operating system. Lot of software. Cheap printer VDU available. Melbourne (03) 56.5731.

SELL: 2650 System in EA terminal case, 2K, EA VDU, cassette interface, EA keyboard. \$300. Write: M E Kenny, Box 29, Blackwood, 5051.

SELL: Working SCAMP LCDS prototype system with 4K RAM, manuals, circuits. \$400 ONO write airmail to Mark Edwards, Box 3456, Port Moresby, Papua New Guinea.

FOR sale: 4600 synthesizer keyboard controller \$70, transient 2 \$20. Master mixer dual input preamps \$5. Carl Vine, 125 Arthur Street, Surry Hills. (02) 33.5647.

2650 micro BASIC. 1.6K integer +/-32K + - x/18 statements. Editor. Complete source listing + manual + CUTS tape. \$8.50, A Peek, 10 Gale Street, Woolwich, NSW 2110.

WANTED: Midland 13-894 must be one left in Aust in working order. Send info and price to Ray, VCF126, PO Box 76, Mordialloc, Melb, 3195.

"ELEKTOR" Dutch electronics magazine, English Edition really different; interesting. All 1978 issues in mint condition \$18.00. R Martin, 8 Holmes Avenue, Sefton (02) 645.3737.

AUSTRALIAN Radio DX Club, for shortwave and mediumwave DXers. Monthly magazine published. Write for details, with 20 cent stamp to PO Box 67, Highett, Vic or PO Box 79, Narrabeen, NSW 2101.

SC/MP micro kit with documentation, P/S, hex k-board & disp. Also new hall effect ASCII k-board. The lot \$150, phone Ray, Perth 342.5929.

SELL: CRO 3" single beam, working \$45. G Mann, 5 Rason Place, Curtin ACT 2605.

FOR sale: 5 x 7 dot matrix displays type TIL 305. Leads trimmed for pcb insertion 10 for \$12 or \$1.50 for sample. L McClure, 20 Sartori Street, East Burwood, 3151 (03) 233.5664.

FOR sale: Electros 55V/65V 20,000 microfarads, West Ryde, (02) 808.2463.

WANTED Teletype ASR 33 with paper tape facility - Barry Griffiths, 93 Glenlyon Drive, Wulguru, 4811, phone (077) 72.2077 or (077) 78.1819 AH.

WANTED transistorised amplifier circuit, Seimens 2000 projector - also Astro Kino colour IV, 1:1.4 35 mm lens. A Schmidt, PO Box 241, Southport, Qld 4215.

EDDYSTONE Model EC10 solid state communications receiver. .55 to 30 MHz, excellent condition, \$160. WHR Treloar, phone (02) 239.5267 (office hours).

SELL: HP9815 desktop computer, hardly used, \$2900. Also several interfaces and ROMs for Hewlett Packard desktop computers. Rex Jooste, Pymble, NSW (02) 449.6566 (weekdays).

40 ETI Dec 73 - May 78, \$32.00. 46 EA Jun 73 - Feb 78, \$35.00. 27 PE Oct 73 - Aug 77, \$15.00. The lot \$75.00. (02) 624.4485.



COME ON BACK!

WE'RE SERIOUS ABOUT GETTING YOU BACK, AND TO PROVE IT
JUST LOOK AT SOME OF THE SPECIALS BELOW



THIS MONTH'S COMPONENT SPECIALS:



50K D.G. LIN ROTARY POT50c
100K D.G. LIN ROTARY POT50c
500K D.G. LOG ROTARY POT50c
25K D.G. LIN SLIDER POT.....50c
100K D.G. LIN POT50c
100K D.G. LOG SLIDER POT50c

0.47uf 50v ELECTROS.....5c
2.2uf 50v ELECTROS5c
47uf 50v ELECTROS.....10c
3300uf 16v ELECTROS.....75c
2500uf 16v ELECTROS.....60c



We are stockists of a large range of speaker kits and loudspeaker components. We have Philips, Plessey-Foster, Jenzaki, Magnovox, Peerless and Etone. If we haven't got it in stock, we'll order it. All specials are available by mail order from:



DAVID RYALL Electronics

PO Box 176, Dee Why.
(Add \$1.00 P&P)

2 SHOPS LOCATED CONVENIENTLY AT:

657 Pittwater Road, Dee Why,
Sydney. Ph (02) 982-7500.



293 St. Pauls Tce, Fortitude Valley,
Brisbane. Ph (07) 52-8391.

Electronics Today International

4600 and 3600 SYNTHESIZERS

Complete plans for the Electronics Today International 4600 Synthesizer are now available in book form. Many hundreds of these remarkable synthesizers have been built since the series of construction articles started in the October 1973 issue of Electronics Today.

Now the articles have been re-printed in a completely corrected and up-dated form.

The International Synthesizers have gained a reputation as being the most flexible and versatile of electronics instruments available.

They have been built by recording studios, professional musicians, university music departments and as hobby projects.


This book is available now as a limited edition of 2000 copies only.

Ensure your copy!

Send \$12.50 to Electronics Today International,
15 Boundary Street, Rushcutters Bay, 2011.

DEK

Model 250

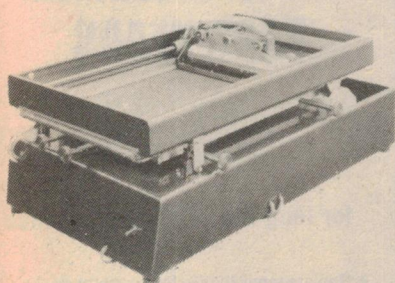

**TWICE AS MANY
OR TWICE AS FAST
OR TWICE THE SIZE**

That's roughly the promise of the new Dek 250 precision screen printer. Double benefits all round. Whether you are resisting P.C.B.'s, printing front panels or producing foil or plastic labels.

The Dek 250 prints an area of 18" x 10" (450 x 250mm) More than twice the size of the well established Model 240.

Of course the model 240 is still available. So is the Dek 1200 specifically designed for thick film work. So too is the Dek 65 for R & D applications.

DEK


**PRECISION
PRINTING
SYSTEMS**

Represented in Australia by
Findon Machinery Co. Pty. Ltd.

31 Metropolitan Ave.,
Nunawading, Vic. 3131.
Phone (03) 878-0883.

PAS

Manufacturers of professional sound equipment for bands, recording studios, musicians, broadcasters.




Illustrated:

**Mixer Model
8-DCMP \$725**

Featuring — 6 mic inputs, 2 line inputs, input gain, reverb/echo, treble, bass, pan, slide volume, peak leds, two main sliders, two aux out sliders, 7 band graphic, head phone socket, inbuilt reverb unit, switchable V.U. meter, 75W/ch amps, aux out levels plus 4dbm, 19" rack mountable, expander connector.

Also available — 9 channel expander to make 17 input mixer. **\$575**

**Universal
Mic Stand
\$45**



Features:

Matt stainless steel barrels, heavy folding solid steel legs, universal height/position joint, maximum height 2m.

OTHER PRODUCTS

200 W/Ch amps with built-in limiters \$625. Speaker systems. Microphones. etc.

Trade enquiries welcome

**PROFESSIONAL
AUDIO SYSTEMS**

91 Musgrave Rd, Red Hill. 4059.
Ph (07) 36-5251

TAPE PRICES SLASHED

**UP TO 40%
OFF
R.R.P.**

While
stocks
last.

	Size	Our Price	R.R.P.
* Ampex Plus Series IMPORTED	C60	\$1.59	\$2.75
Ampex 20/20 Series	C120	\$1.79	\$3.05
	C90	\$1.89	\$4.05

Top of the TDK Range	C90	\$3.99	\$6.50
* Hitachi LN	C60	\$1.89	\$2.32
	C90	\$2.69	\$3.29
* Hitachi U.D.	C60	\$2.99	\$3.95
	C90	\$3.69	\$4.68
* Dindy Super 5 year replacement guarantee	C46	.89	Save
	C60	.99	while
	C90	\$1.29	stocks
	C120	\$1.49	last

**For Sydney C.O.D. Delivery
within 48 hours
Ring ROSS STANDFAST
on 438 3855
or Post To:**

Dindy Marketing P/L P.O. Box 555
Tweed Heads NSW 2485 Ph. 36 4629
BANK: NSW Coolangatta

ORDER FORM:

QTY.	Type/Size	Price	TOTAL

Delivery & Insurance \$2.00

TOTAL

\$
ENCLOSED



Name

Address

Post Code

Phone

SEND FOR FREE CATALOGUE ☐

We are the Australian dealers for **JADE** computer products

MICRO COMPUTERS

HORIZON II computer with Z80a, 16k RAM, Real Time clock, 2 serial and 2 parallel ports, 2 Shugart SA400 double density disk drives (180k/diskette of formatted storage) with Northstar Basic, DOS, Monitor Programmes, I/O routines.

KIT\$2,400 plus 15 percent sales tax.
Assembled & tested with 12 months warranty —
\$3,590 plus 15 percent sales tax.

Additional disk drives and memory available. Send SAE for details.

OFFICE DATA SYSTEMS

Computer with dual 8" discs (with 48k RAM); Terminal (80 chr by 24 lines, ASCII keyboard, separate 19-key numeric pad with letters A to E); Centronics 770-2 printer with tractor feed; CP/m file handling system; Basic Language; utilities; fully assembled and tested with 1 year warranty.

PRICE.....\$7,700 plus 15 percent sales tax

FREE Debtors, Creditors, Payroll and General Ledger programmes. All written for Australian conditions. Other Printers are available — Centronics 780, IP225, Axion 801p.

SOFTWARE

We have an extensive range of software: Languages (including Pascal, C-Basic, M-Basic, E-Basic, Northstar Basic, Microsoft Disc Basic, Fortran) Word Processors, Database packages (CODASYL by Xitan) etc., send SAE for prices.

We will match any Australian competitor's advertised price on goods listed in this advertisement. Please send us the relevant details with your order.

Prices subject to change without notice.

ECONOMIC DIGITAL CONTROL PTY. LTD.

SHOWROOM: 33-35 Atchison St,
St. Leonards. 2065. PO Box 817,
Crows Nest, NSW. 2065.

MOBILE DISCO MIXERS



• • • READY TO GO, with mic, inbuilt 240 watt RMS total Power Amplifiers, 4 stereo inputs all with tone controls, magnetic cartridges, automatic crossfade between turntables and voice over, input and output for tape recorder, output for Musicolor and 2 Column speakers.

\$1,900

• • • ALSO AVAILABLE for custom installation, complete mixer wired & tested and assembled to front panel (no case).

\$500

• • • MIXER FRONT PANEL ONLY and printed circuit board set (unwired) with VU meters, lights and switches.

\$200

Specialists in permanent installations.

LOTSAWATTS SOUND SYSTEMS of AUSTRALIA

PO Box J97, BRICKFIELD HILL
NSW 2000
Ph: BH 969-5396, AH 922-5257.

• MAIL ORDERS WELCOME •



NORTRONICS AUDIO & DIGITAL TAPE HEADS



for long-life extended response

- Replacement heads for cassette decks, reel to reel decks, cartridges and cassette recorders. Also professional recorders and duplicators.
- Will fit AMPEX, SCULLY, TEAC, ATC, GATES, PENTAGON, IFONICS and many more.
- Complete range of Alignment tapes for cassette, reel to reel and cartridge decks.
- REGULAR MAINTENANCE ENSURES CONTINUED OPTIMUM PERFORMANCE. Nortronics manufacturers a full range of audio care products.



MAGNETIC TAPE
DEVELOPER



ALIGNMENT
TAPES



BULK
ERASER



TAPE
HEAD
CLEANER



TAPE
SPLICER

- NORTRONICS audio care products are designed to care for and maintain your valuable recording equipment.
- SEND TWO 20c STAMPS FOR OUR FREE BROCHURE ON THE COMPLETE NORTRONICS RANGE.

**E.I. EMAC
INDUSTRIES Pty. Ltd.**

9 Meriton Place, Clayton South,
3169. Tel: 544-5157

Ideas for experimenters

These pages are intended primarily as a source of ideas. As far as reasonably possible all material has been checked for feasibility, component availability etc, but the circuits have not necessarily been built and tested in our laboratory. Because of the nature of the information in this section we cannot enter into any correspondence about any of the circuits, nor can we produce constructional details.

Electronics Today is always seeking material for these pages. All published material is paid for — generally at a rate of \$5 to \$7 per item.


Battery Condition Indicator

This simple circuit loads the battery under test and then checks to see if the output voltage is above 80% of its specified value. The resistor, R1, draws a steady load current (I_{load}) and the total current drawn from the battery is thus I_{load} plus I_{LED} . The zener voltage is selected so that the LED will not light when the battery voltage drops below the required value.

$$R_1 = 0.8 \times V_b / I_{load}; V_{zd} = 0.8 \times V_b - V_{led}; R_2 = (V_b - V_{zd} - V_{LED}) / I_{LED} \text{ (max)}$$

V_b	R_1	R_2	V_{zd}
3	270	68	0.7*
4.5	390	100	2.1*
6	470	120	3.3
9	820	180	5.6
12	1k	220	8.2
18	1k5	390	13.0

* For these low zener voltages, use one or more silicon diodes in series, forward biased.




Supply Protector

For those expensive (computer) boards, place a 1W (or bigger) zener diode across each supply rail, with a voltage rating 1–2V above the rail voltage. A 6.2 V one will be ideal for a 5 volt rail, for example. It doesn't cost much and when you drop the 50 V supply leads across the 5 V rail (accidentally), the zener will protect the circuit and in the case of gross overload will go short (usually). You blow a 50c zener instead of \$50 of ICs.

TO-3 Template

Sometimes it's a bit tricky trying to mark out the holes for a TO-3 case on a heat sink. If, however, you keep a blown TO-3 device (and most people will have plenty of those!), then by removing the cap and the leads it will form a useful template for centre-punching the holes.

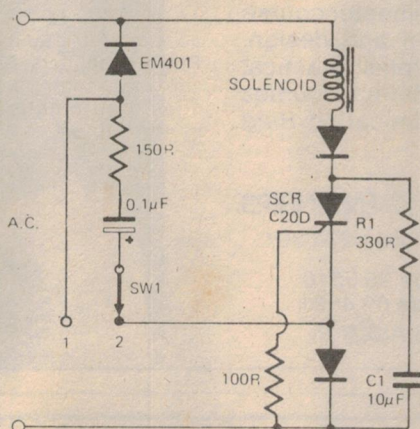

Impulse Power


This circuit is often used in electrically powered stapling machines, impulse hammers etc. and causes load current to flow through the load for one complete half-cycle of the ac supply whenever SW1 is actuated (i.e. moved from its normal position [1] to energise-load position [2]). The circuit is arranged so that the SCR is always triggered at the beginning of a positive half-cycle of the ac supply, even though the switch may be closed randomly at any time during the previous two preceding half-cycles.

Resistor R1 and capacitor C1 should be chosen so that their series combination supplies just sufficient holding current for the SCR for one complete half-cycle.

FREE

78/79

CATALOGUE

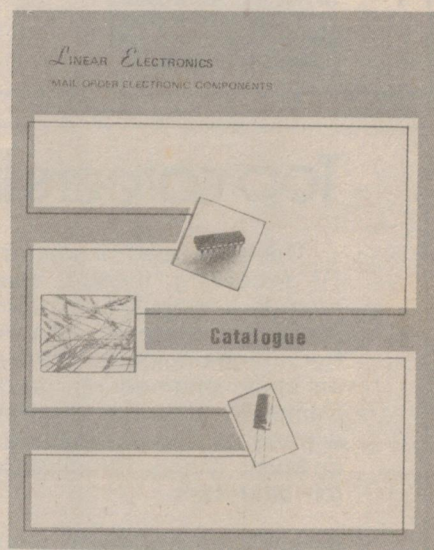

Write for
your
copy
NOW!

LINEAR ELECTRONICS

MAIL ORDER ELECTRONIC
COMPONENTS

PO BOX 254, PUNCHBOWL
2196




PROFESSIONAL SOUND & LIGHT SOUND & LIGHT SOUND & LIGHT SOUND & LIGHT

**Importers of
Quality Electronic Equipment**

Complete HIRE • SALES • DESIGN
service to the entertainment industry.

OFFICE and SHOWROOMS
2388 Gold Coast Highway,
Mermaid Beach, Qld. 4218.
Phone (075) 38-3331.

DJ S77 STEREO DISCOMIXER




**SUPERIOR DESIGN
CLEAN, CRISP SOUND
REPRODUCTION.**

Automatic voice override • tape-in, tape-out • 2 microphone in • 2 x turntables in • T.T. start buttons • slave out • 2 year guarantee.
Available separate or in console C/W turntables and 200 watt power amp built-in. Mono or stereo. Size (mixer only) 17cm x 86.5cm x 9cm. Weight 4.5kg.

LITO 250 PROFESSIONAL EFFECTS PROJECTOR

• New 250W Quartz Iodine Effects projector for use with effects from spectacular Lightomation range • Lens system totally enclosed to eliminate light spill • Cool, quiet operation, high efficiency tangential air blower • Used free-standing or suspended with adjustable handle • Supplied as "Main-Frame Unit" with 50mm lens, 60, 85 & 100mm avail. • 14 attachments available — changed by slide-in rotator system — wide selection of cassettes & 6" Effect Wheels • Mains voltage selector gives range of 6 input voltages.



• STROBES • SOUND TO LIGHT UNITS • DRY ICE FOG MACHINES • ROPELITES • LIGHTING STANDS • BEACONS
• JBL SPEAKERS & CABINETS • Brochures available on request.

Top careers in sound production begin here

There is a need for sound production people in TV, recording, theatre, clubs, engineering hit records, designing studios, installing sound reinforcement systems. The Academy of Sound Recording Engineers offers a 3 semester course on audio engineering, production and design. Complete technical knowledge plus practical experience. No wasted time. Additional courses on Music Theory, Effective Communication. *Ring for full details.*


ACADEMY OF SOUND RECORDING ENGINEERS

54-50 Alfred St., Milsons Point, Sydney 922 6301

• Canberra 80 4446 • Melbourne 95 9510
• Adelaide 261 1383 • Newcastle 69 4021
John Burnett, Stephen Penning A.S.R.E.




2708 PROM PROGRAMMER

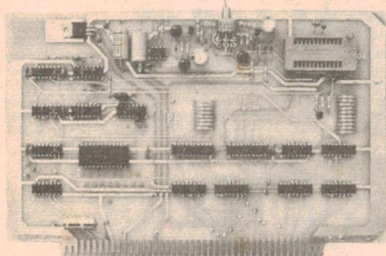


• For 2708's, can adapt to TMS2716.
• PROMS programmed by memory store instructions.
• PROM can be read normally.
• Standard supplies +5 +12 -12.
Assembled & Tested \$130.20.
Software drivers available.
ALL CARDS HAVE:
• Motorola Exorcisor Bus as on D2.
• Compatible with most micros.
• PCB's plated through plus resist.

16K STATIC RAM

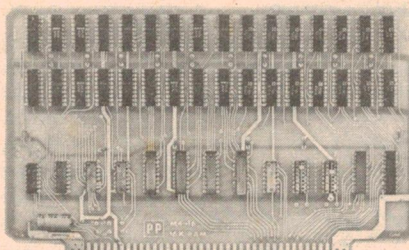

• Uses 2114L 1K x 4 statics. • Only 1.2A at 5V for 16K.
• 8K blocks switch addressable.
450nS KIT:
4K \$153.20; 8K \$207.20; 16K \$312.60
450nS ASSEMBLED & TESTED:
4K \$179.80; 8K \$241.35; 16K \$359.70
300nS KIT:
4K \$161.20; 8K \$223.20; 16K \$344.60
300nS ASSEMBLED & TESTED:
4K \$187.80; 8K \$257.35; 16K \$391.70.

16K PROM + PROGRAMMER

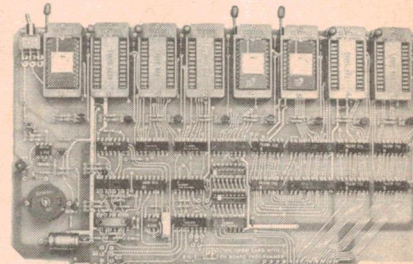

• For INTEL 2716/TEXAS 2516.
• Single +5V supply, 25V generated.
• Read PROM's and execute programs as for a normal PROM Card.
• Program any location with a single store instruction.
• 8K blocks switch addressable.
Ass. & test. with Low IF skts. \$197.30.
Ass. & test. with ZIF skts. \$236.20.
Software drivers available.


(Add 15 percent if sales tax applicable. P&P \$3)



PENNYWISE PERIPHERALS

19 Suemar Street, Mulgrave, Victoria. 3170. Phone (03) 546-0308.

Ideas for experimenters

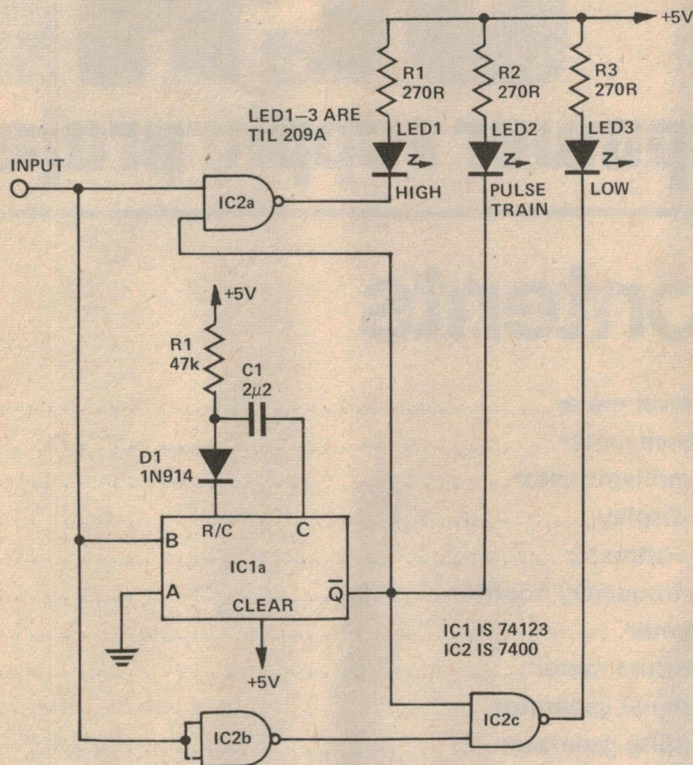


TTL Logic Probe

This two-IC circuit indicates one of three states: 1) high 2) low or 3) pulse train at greater than 40 Hz. IC1a is a monostable and with the component values given, the Q output will be high for as long as there is a pulse train present with a frequency of 40 Hz or greater. The 7400 buffers the input to the LEDs and its logic prevents either the 'high' or 'low' LED from being lit when a pulse train is present.

CDI for Positive Earth

The CDI Mk II ignition published in the May 77 issue has been designed for negative earth cars. Attempting to install it in positive earth vehicles by reversing the supply connections will lead to problems caused by SCR1 triggering as C3 is discharged (ie as the contact points close, and not as they open).

This modification provides a solution by discharging C3 through transistor Q3 which conducts when the points open. Any general purpose PNP transistor capable of sinking 200mA (eg BC212, BC214L) will do.

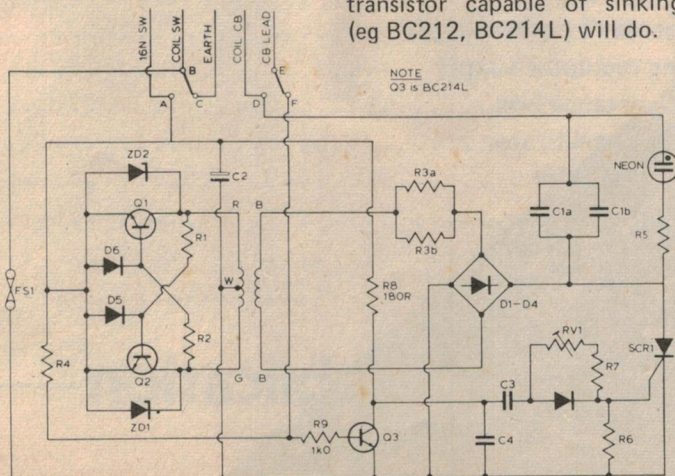

RADCOM

constructor components

EVERYTHING FOR
THE CONSTRUCTOR
AT ONE SHOP
AT PRICES TO SUIT
YOUR BUDGET

KITS!

We're moving into kits.
Your enquiries are welcome

SILICON VALLEY STOCKISTS

- CAPACITORS —
- RESISTORS —
- POTS —
- SWITCHES —
- PLUGS —
- SOCKETS —
- PANEL LAMPS —
- TRANSISTORS —
- DIODES —
- BOXES —
- LEDS —
- IC's —

Try us for the
hard-to-get components

Block Capacitors
Silver Micas
High Voltage
etc, etc

We are now carrying
Ferguson Transformers

Cnr. Eldridge & Willfox Rds.
BANKSTOWN, NSW.
709-4706

TEST GEAR

- metering and power supply projects

EDITORIAL

Project Designs: Barry Wilkinson
Editor: Jan Vernon
Publisher: Collyn Rivers
Managing Director: Arnold Quick

ADVERTISING

Sydney: Tel 33-4282
Melbourne: Tel 51-9836

Contents

Audio level meter	5
Impedance meter	9
Audio millivoltmeter	15
Digital display	20
Digital voltmeter	23
Simple frequency counter	27
Phase meter	33
Temperature meter	37
Audio signal generator	40
Audio noise generator	44
Tone burst generator	47
Cross hatch/dot generator	52
RF signal generator	55
Marker generator	59
Logic probe	62
Logic pulser	65
Logic tester	67
Simple CMOS tester	73
Transistor tester	77
Linear IC tester	78
IC power supply	80
Dual power supply	84
Basic power supply	90
Experimenter's power supply	91
Regulating regulator supply	95
Resistance box	99
Calibrator	101
.....	102
.....	106
.....	108
.....	110

Test Gear
Wilke and Co.
Melbourne.
Distributed by Gon
(*Recommended and
price only).
Copyright: Electronics Today
International.



an ELECTRONIC

Publication

Look for TEST GEAR at your newsagents now!
Recommended retail price \$3.00 - or order
directly from Electronics Today, 15 Boundary
Street, Rushcutters Bay, NSW 2021. (Add
45 cents post and packing).

DIODES/ZENERS			
QTY.			
1N914	100v	10mA	.05
1N4005	600v	1A	.08
1N4007	1000v	1A	.15
1N4148	75v	10mA	.05
1N4733	5.1v	1 W Zener	.25
1N753A	6.2v	500 mW Zener	.25
1N758A	10v	"	.25
1N759A	12v	"	.25
1N5243	13v	"	.25
1N5244B	14v	"	.25
1N5245B	15v	"	.25

SOCKETS/BRIDGES			
QTY.			
8-pin	pcb	.20	ww .35
14-pin	pcb	.20	ww .40
16-pin	pcb	.20	ww .40
18-pin	pcb	.25	ww .95
20-pin	pcb	.35	ww .95
22-pin	pcb	.35	ww .95
24-pin	pcb	.35	ww .95
28-pin	pcb	.45	ww 1.25
40-pin	pcb	.50	ww 1.25
Molex pins	.01 To-3 Sockets	.25	
2 Amp Bridge	100-prv	.95	
25 Amp Bridge	200-prv	1.50	

TRANSISTORS, LEDS, etc.			
QTY.			
2N2222	(2N2222 Plastic .10)	.15	
2N2222A		.19	
2N2907A	PNP	.19	
2N3906	PNP (Plastic Unmarked)	.10	
2N3904	NPN (Plastic Unmarked)	.10	
2N3054	NPN	.45	
2N3055	NPN 15A 60v	.60	
T1P125	PNP Darlington	1.95	
LED Green,	Red, Clear, Yellow	.15	
D.L.747	7 seg 5/8" High com-anode	1.95	
MAN72	7 seg com-anode (Red)	1.25	
MAN3610	7 seg com-anode (Orange)	1.25	
MAN82A	7 seg com-anode (Yellow)	1.25	
MAN74	7 seg com-cathode (Red)	1.50	
FND359	7 seg com-cathode (Red)	1.25	

9000 SERIES			
QTY.		QTY.	
9301	.85	9322	.65
9309	.35	9601	.20
9316	1.10	9602	.45

MICRO'S, RAMS, CPU'S, E-PROMS			
QTY.		QTY.	
8T13	1.50	2107B-4	4.95
8T23	1.50	2114	9.50
8T24	2.00	2513	6.25
8T97	1.00	2708	10.50
74S188	3.00	2716 D.S.	34.00
1488	1.25	2716 (5v)	59.00
1489	1.25	2758 (5v)	23.95
1702A	4.50	3242	10.50
AM 9050	4.00	4116	11.50
		6800	13.95
MM 5314	3.00	6850	7.95
MM 5316	3.50	8080	7.50
MM 5387	3.50	8212	2.75
MM 5369	2.95	8214	4.95
TR 1602B	3.95	8216	3.50
UPD 414	4.95	8224	3.25
Z 80 A	22.50	8228	6.00
Z 80	17.50	8251	7.50
Z 80 P10	10.50	8253	18.50
2102	1.45	8255	8.50
2102L	1.75	TMS 4044	9.95

C MOS	
QTY.	
4000	.15
4001	.15
4002	.20
4004	3.95
4006	.95
4007	.20
4008	.75
4009	.35
4010	.35
4011	.20
4012	.20
4013	.40
4014	.75
4015	.75
4016	.35
4017	.75
4018	.75
4019	.35
4020	.85
4021	.75
4022	.75
4023	.20
4024	.75
4025	.20
4026	1.95
4027	.35
4028	.75
4029	1.15
4030	.30
4033	1.50
4034	2.45
4035	.75
4037	1.80
4040	.75
4041	.69
4042	.65
4043	.50
4044	.65
4046	1.25
4048	.95
4049	.45
4050	.45
4052	.75
4053	.75
4066	.55
4069/74C04	.35
4071	.25
4081	.30
4082	.30
4507	.95
4511	.95
4512	1.10
4515	2.95
4519	.85
4522	1.10
4526	.95
4528	1.10
4529	.95
MC 14409	14.50
MC 14419	4.85
74C151	1.50

LINEARS, REGULATORS, etc.			
QTY.		QTY.	
MCT2	.95	LM323K	5.95
8038	3.95	LM324	1.25
LM201	.75	LM339	.75
LM301	.45	7805 (340T5)	.95
LM308	.65	LM340T12	.95
LM309H	.65	LM340T15	.95
LM309K (340K-5)	1.50	LM340T18	.95
LM310	.85	LM340T24	.95
LM311D	.75	LM340K12	1.25
LM318	1.75	LM340K15	1.25
LM320H6	.79	LM340K18	1.25
LM320H15	.79	LM340K24	1.25
LM320H24	.79	LM373	2.95
7905 (LM320K5)	1.65	LM377	3.95
LM320K12	1.65	78L05	.75
LM320K24	1.65	78L12	.75
LM320T5	1.65	78L15	.75
LM320T12	1.65	78M05	.75
LM320T15	1.65		
		LM380 (8-14 Pin)	1.19
		LM709 (8-14 Pin)	.35
		LM711	.45
		LM723	.40
		LM725	2.50
		LM739	1.50
		LM741 (8-14)	.35
		LM747	1.10
		LM1307	1.25
		LM1458	.65
		LM3900	.50
		LM75451	.65
		NE555	.45
		NE556	.85
		NE565	.95
		NE566	1.25
		NE567	.95

- T T L -			
QTY.		QTY.	
7400	.10	7482	.75
7401	.15	7483	.75
7402	.15	7485	.55
7403	.15	7486	.25
7404	.10	7489	1.05
7405	.25	7490	.45
7406	.25	7491	.70
7407	.55	7492	.45
7408	.15	7493	.35
7409	.15	7494	.75
7410	.15	7495	.60
7411	.25	7496	.80
7412	.25	74100	1.15
7413	.25	74107	.25
7414	.75	74121	.35
7416	.25	74122	.55
7417	.40	74123	.35
7420	.15	74125	.45
7426	.25	74126	.35
7427	.25	74132	.75
7430	.15	74141	.90
7432	.20	74150	.85
7437	.20	74151	.65
7438	.20	74153	.75
7440	.20	74154	.95
7441	1.15	74156	.70
7442	.45	74157	.65
7443	.45	74161	.55
7444	.45	74163	.85
7445	.65	74164	.60
7446	.70	74165	1.10
7447	.70	74166	1.25
7448	.50	74175	.80
7450	.25	74176	.85
7451	.25	74180	.55
7453	.20	74181	2.25
7454	.25	74182	.75
7460	.40	74190	1.25
7470	.45	74191	1.25
7472	.40	74192	.75
7473	.25	74193	.85
7474	.30	74194	.95
7475	.35	74195	.95
7476	.40	74196	.95
7480	.55	74197	.95
7481	.75	74198	1.45
		74221	1.00
		74367	.95
		75108A	.35
		75491	.50
		75492	.50
		74H00	.15
		74H01	.20
		74H04	.20
		74H05	.20
		74H08	.35
		74H10	.35
		74H11	.25
		74H15	.45
		74H20	.25
		74H21	.25
		74H22	.40
		74H30	.20
		74H40	.25
		74H50	.25
		74H51	.25
		74H52	.15
		74H53	.25
		74H55	.20
		74H72	.35
		74H74	.35
		74H101	.75
		74H103	.55
		74H106	.95
		74L00	.25
		74L02	.20
		74L03	.25
		74L04	.30
		74L10	.20
		74L20	.35
		74L30	.45
		74L47	1.95
		74L51	.45
		74L55	.65
		74L72	.45
		74L73	.40
		74L74	.45
		74L75	.85
		74L93	.55
		74L123	.85
		74LS00	.30
		74LS01	.30
		74LS02	.30
		74LS04	.30
		74LS05	.35
		74LS08	.35
		74LS09	.35
		74LS10	.35
		74LS11	.35
		74LS12	.60
		74LS13	.40
		74LS14	.55
		74LS15	.30
		74LS153	.35
		74LS157	.75
		74LS158	.30
		74LS194	1.05
		74S257 (8123)	1.05
		8131	2.75

CABLE ADDRESS: ICUSD

TELEX #

HOURS: 9 A.M. - 6 P.M. MON. thru SUN.

INTEGRATED CIRCUITS UNLIMITED

7889 Clairemont Mesa Blvd. • San Diego, California 92111 U.S.A.

NO MINIMUM

COMMERCIAL AND MANUFACTURING ACCOUNTS INVITED

ALL PRICES IN U.S. DOLLARS. PLEASE ADD POSTAGE TO COVER METHOD OF SHIPPING.

ORDERS OVER \$100 (U.S.) WILL BE SHIPPED AIR NO CHARGE.

PAYMENT SUBMITTED WITH ORDER SHOULD BE IN U.S. DOLLARS.

ALL IC'S PRIME/GUARANTEED ALL ORDERS SHIPPED SAME DAY RECEIVED.

CREDIT CARDS ACCEPTED:

Phone (714) 278-4394 BarclayCard / Access / American Express / BankAmericard / Visa / MasterCharge

SPECIAL DISCOUNTS

Total Order	Deduct
\$35-\$99	10%
\$100-\$300	15%
\$301-\$1000	20%

READERS' LETTERS

No charge for replies but a foolscap-size stamped addressed envelope must be enclosed. Project queries can only be answered if related to item as published. We cannot assist if project is modified nor if components are otherwise than specified. We can only answer readers' queries by telephone after 4 p.m.

MICROFILM

Microfiche editions of this publication are available by annual subscription from Microsystems Pty Ltd, PO Box 188, North Sydney, NSW. 2060.

SUBSCRIPTIONS AND BACK ISSUES

ETI subscriptions cost \$19.00 per year (inc. postage) within Australia. Cost elsewhere is \$24.60 (inc. postage — surface mail). Airmail rates on application.

Back issues cost \$1.25 each plus 45 cents post and packing.

We can supply **only** the following issues.

1976: Nov., Dec. 1977: All issues except Jan, Feb, March. 1978: All issues.

Photostats are available of any article ever published in ETI. We charge a flat \$2.00 regardless of page quantity from any one issue of ETI. Thus if the article is in three issues the cost is \$6.00. Send orders to the address below.

Binders \$4.50 plus 90c post NSW, \$2.00 other States.

COPYRIGHT

The contents of Electronics Today International and associated publications is fully protected by the Commonwealth Copyright Act (1968).

Copyright extends to all written material, photographs, drawings, circuit diagrams and printed circuit boards. Although any form of reproduction is a breach of copyright, we are not concerned about individuals constructing projects for their own private use, nor by pop groups (for example) constructing one or more items for use in connection with their performances.

Commercial organisations should note that no project or part project described in Electronics Today International or associated publications may be offered for sale, or sold, in substantially or fully assembled form, unless a licence has been specifically obtained so to do from the publishers, Modern Magazines (Holdings) Ltd or from the copyright holders.

LIABILITY

Whilst every effort has been made to ensure that all constructional projects referred to in this edition will operate as indicated efficiently and properly and that all necessary components to manufacture the same will be available, no responsibility whatsoever is accepted in respect of the failure for any reason at all of the project to operate effectively or at all whether due to any fault in design or otherwise and no responsibility is accepted for the failure to obtain any component parts in respect of any such project. Further, no responsibility is accepted in respect of any injury or damage caused by any fault in the design of any such project as aforesaid.

A MODERN MAGAZINES PUBLICATION

Art Director:	Clive Davis
Assembly:	Bill Crump/Simon Bracken
Production Manager:	Bob Izzard
Editorial Staff:	Phil Wait, Roger Harrison, Phil Cohen, Jan Vernon, Ron Keeley Jan Collins
Reader Services:	John Oxenford
Subscriptions & Circulation:	Louis A. Challis & Assoc.
Acoustical Consultants:	

Sydney:	Modern Magazines Bob Taylor (Manager), Geoff Petschler (NSW Manager), 15 Boundary St., Rushcutters Bay 2011. Tel: 33-4282.	Perth:	Aubrey Barker, 133 St. George's Terrace, Perth. 6000. Tel: 322 3184.
Melbourne:	Modern Magazines Tom Bray (Manager), Poppe Davis, Suite 24, 553 St. Kilda Rd, Melbourne. Tel: 51-9836.	Hobart:	H.W. Lincone, 23 Lord St, Sandy Bay. Tasmania. 7005.
Brisbane:	Modern Magazines Geoff Horne, 60 Montanus Drive, Bellbowrie, Qld. 4070. Tel: 202 6229.	Tokyo:	Genzo Uchida, Bancho Media Service, 15 Sanyocho, Shintoku-Ku, Tokyo 160.
Adelaide:	Harry Hastwell Media PO Box 30, Glen Osmond, SA 5064. Tel: 79 1869, 79 5956.	London:	Electronics Today International, 25-27 Oxford St, London, W1R 1RF. Tel: 01-434-1781/2.
		U.S.A.:	Elmatex International, PO Box 34607. Los Angeles, CA. 90034. Tel: (213) 821 8581. Telex: 18 1059 (Elmatexint USA)

ADVERTISERS' INDEX

Advanced Computer Products	92
Applied Technology	33, 47
Aust. Seminar Services	73
ASRE	102
Automation Statham	64
Ampec Engineering	74
Bowen	88
Cema	29, 43
Centaur Industries	62
Chloride Batteries	4
Dicker, J.W.	68
Dick Smith	8, 54-55, 85
Director of Recruiting	42, 76
Diggerman Electronics	20
David Ryall Electronics	98
David Reid Electronics	50
Dindy	99
Emona	6
Electronic Calculator Discounts	96
Emac	100
Electronic Agencies	94
Economic Digital Control	100
Electrocraft	95
Phone Audio	21
Findon Machinery Co	99
General Electronic Services	91
Hagemeyer	107
Inter. Correspondence Schools	51
IC's Unlimited	105
Jaycar	20
Lotsawatts Sound Systems	100
Linear Electronics	101
Maurice Chapman	16
Mannics Australia	69
McGills Newsagency	59
Matra Musical Industries	91
National Panasonic	108
Philips	19
Pre Pak	81
Professional Audio Systems	99
Pennywise Peripherals	102
Rod Irving Electronics	38
Radio Parts Group	77
Rave Electronics	102
Radcom	103
Romtech	58
Reg Geary & Assoc	93
Sansui	2
Semcon Microcomputers	60
Stanton Magnetics	28
SM Electronics	96
Tandy	78
Trio-Kenwood	89
Tasman Electronics	48
Transient Electronics	46
Vicom	82

Electronics Today International is published by Modern Magazines (Holdings) Ltd, 15 Boundary St., Rushcutters Bay, NSW 2011. It is printed (in 1979) by Wilke & Co., Browns Rd, Clayton, Victoria and distributed by Australian Consolidated Press.

When it comes to speaker design, JVC goes 2969 times further.

Traditionally, speaker systems have been designed by a tedious trial and error process, by which individual combinations of speaker, crossover and enclosure combinations are analyzed—one at a time—until the desired sonic results are achieved.

JVC has put an end to these time-consuming and archaic procedures, with a revolutionary new system called Phase Moire (Mor-ay) Propagation Technology, that uses a specially-constructed device to move a test microphone in a way that creates and preserves, via computers, video and high-speed filming, a field of nearly 3000 sound testing positions.

By viewing the film, our engineers can actually see what a speaker will sound like before they get too far into the design process.

The initial result of our unique Phase Moire Technology, combined with a great deal of human engineering, is the SK-1000. This unusually-efficient, extraordinary-sounding three-way speaker system delivers


truly magnificent, rock-solid bass from its 12" free-edge woofer and heavy magnet structure. Capable of handling up to 170-watt peaks (85 watts RMS), the SK-1000 reproduces vocals and midrange with unusual smoothness, thanks to our specially-designed 5" midrange driver. Clear, crisp, brilliant highs are dispersed evenly within the listening area from a 1" soft-dome tweeter.

We also give you complete control over midrange and tweeter response with a pair of front-panel level controls.

But all the technology in the world can't fool two of the most sophisticated testing devices known: your ears. And all the words in the world can't tell you what the SK-1000 (and its two smaller companions, the SK-700 and SK-500) really sound like.

So we suggest that you hear what we've been talking about at a JVC dealer.


For details on all JVC Hi-Fi Equipment, write to JVC Advisory Service, P.O. Box 307, North Ryde, New South Wales 2113.

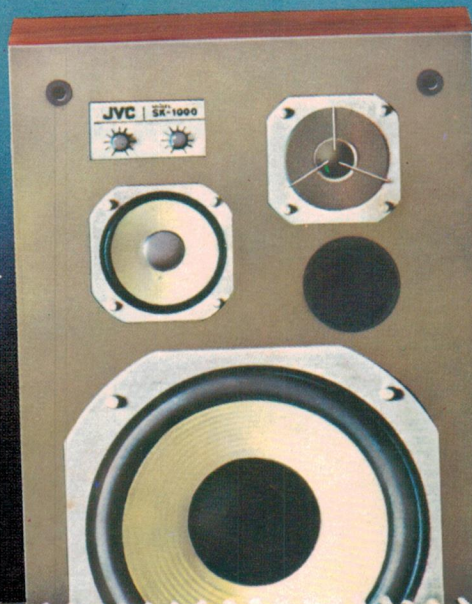

For pure Hi-Fi entertainment!

JVC

the right choice

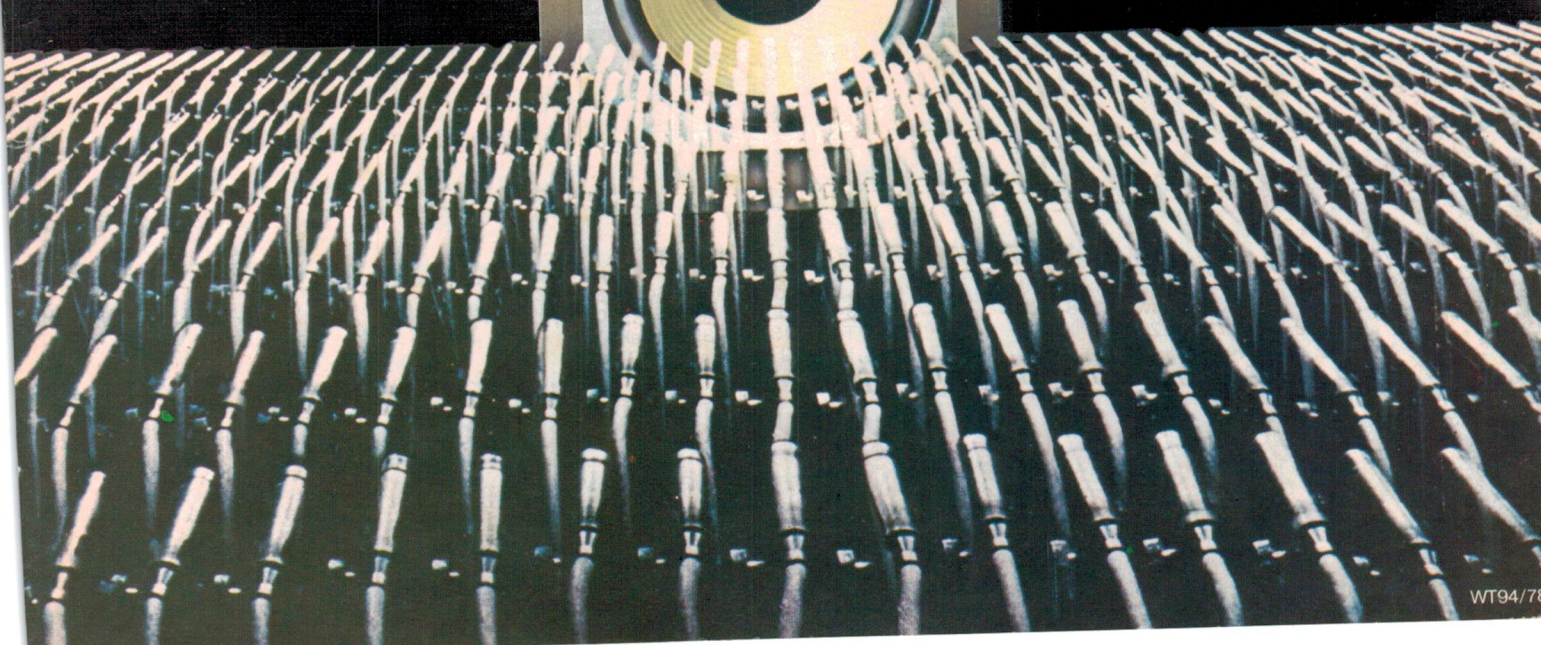

THE DIFFERENCE IS STAGGERING.



Technics Linear Phase speaker systems were designed to reproduce music that sounds as close as possible to the original. Through exhaustive research Technics engineers designed and built equipment to find out exactly how sound travels at different frequencies. Then oscilloscopes were used to shape the revolutionary "staggered" design of the separate wide-range speaker units, so the sound from each reaches you simultaneously. So far as listening pleasure is concerned linear phasing means pure musical reproduction with brilliance when

brilliance is needed and clarity in the softest as well as the loudest musical passages. Shown above is the SB-7000, Technics' best selling linear phase speaker, and the SB-007 system. This is an exact image of its famous big brother in terms of performance capabilities as much as appearance. But around half the size . . . and cost. So now true linear phase response can be enjoyed in a convenient, compact format.

Technics linear phase speakers. A new experience in realism.

For a National Technics catalogue, please write to:
National Technics Advisory Service, P.O. Box 49, Kensington, N.S.W. 2033.



Technics

hi-fi

T78.19